


Copyright FCI

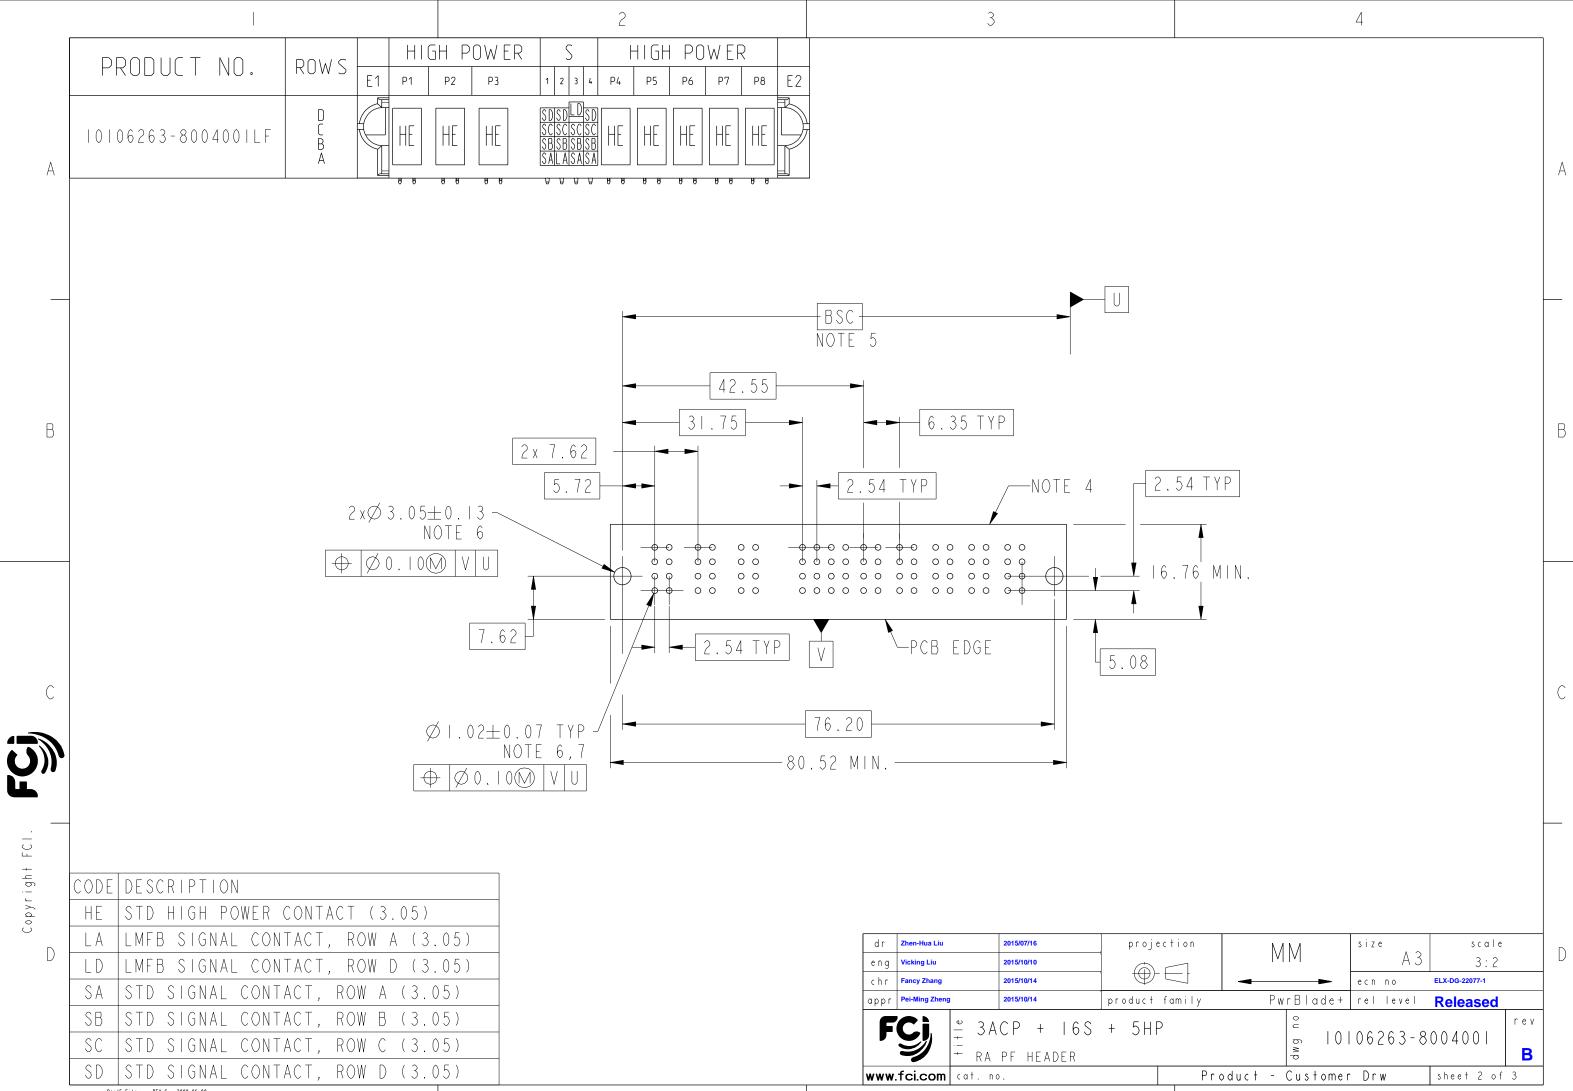

_
δ
· —
<u> </u>
>
Q
\circ
\odot

FC I.

CODE	DESCRIPTION
ΗE	STD HIGH POWER CONTACT (3.05)
LA	LMFB SIGNAL CONTACT, ROW A (3.05)
LD	LMFB SIGNAL CONTACT, ROW D (3.05)
SA	STD SIGNAL CONTACT, ROW A (3.05)
SB	STD SIGNAL CONTACT, ROW B (3.05)
SC	STD SIGNAL CONTACT, ROW C (3.05)
SD	STD SIGNAL CONTACT, ROW D (3.05)
Pro/	rE File - REV C - 2009-06-09

			3		1	PDS: Rev	/ :B			
www	.fci.com	сa	t.nc).						
	۲	+	RA	ΡF	H E A	DER				
F	Ċj	+ +	3 A	СP	+	16S	+	5HF	C	
appr	Pei-Ming Zheng	1		2015/10/14			pr	oduct	family	
chr	Vicking Liu Fancy Zhang			2015/1	0/14			Ψ		
eng				2015/10/10						
dr	Zhen-Hua Liu			2015/07/16				proje	ection	

STATUS:Released

Printed: Oct 21, 2015

NOTES:

I) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE. THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.

2) MATERIALS:

- -HOUSING GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
- -SIGNAL CONTACT COPPER ALLOY.
- -POWER CONTACT HIGH CONDUCTIVITY COPPER ALLOY.

2

- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) I.15 \pm 0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION : GS-12-658. APPLICATION SPECIFICATION : GS-20-141. PRODUCT PACKAGE SPECIFICATION, : GS-14-1502.

dr	Zhen-Hua Liu	2015/07/16	proje	ojection		/ M	size	scale	
eng	Vicking Liu	2015/10/10		\square	\	/ v	A 3	3:2	
chr	Fancy Zhang	2015/10/14	1 -	\Box	-		ecn no	ELX-DG-22077-1	077-1
appr	Pei-Ming Zheng	2015/10/14	product	family	P	wrBlade+	rel level	Released	
F		ACP + 16S pf header	+ 5HP)		dwg no	106263-8	5004001	rev B
www.	fci.com cat. n	0.		Pro	duct -	Customer	Drw	sheet 3 of	3
3 PDS: Rev :B				STATUS:Released Prin			nted: Oct 21, 2015		

3

В

С

FC

Copyright

D

А

4

А

В

(