



PRODUCT NUMBER	CONTACT AREA GOLD PLATING	PACKING
10122975-001LF	Min. 0.76 μ m [30 μ'']	TRAY (SHEET 2)
10122975-002LF	Min. 1.27 μ m [50 μ'']	TRAY (SHEET 2)
10122975-101LF	Min. 0.76 μ m [30 μ'']	TAPE&REEL (SHEET 3)
10122975-102LF	Min. 1.27μm [50μ″]	TAPE&REEL (SHEET 3)

RoHS Compliance












MATERIAL:

- HOUSING-PA9T GN2330 HEAT RESISTANT PLOYAMIDE RESIN BLACK COLOR, UL94V-0
- INSERT HOUSING-DSM STANYL TE250F6 (NYLON-46) HEAT DEFLCTION TEMP.290° BLACK COLOR, UL94V-0.
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD(SEE TABLE) AND GOLD FLASH IN SOLDER AREA.
- HOLD DOWN-0.30mm THICK COPPER ALLOY, PLATED WITH TIN.



PCB LAYOUT Ref.


mat	′l. c	ode				surface /tolerance						proj	ectio	nc	product family								
						ASME Y14.5 V ASME Y14.5						ld) -	1	RJ11 CONNECTOR								
ltr	ecn	ПО	dr	dat	e			less o	therwis	rwise specified					title	5							
Α			TAI	2014-	-09-17	angles a		X.±0.5				_	ММ		RJ11, SMT TYPE							-	
						ungt	52 S	X.X±0.25				INCH]	SIDE ENTRY PCB JACK								<	
						X°±	1°)	<.XX±0.13		scal	.e											
						dr BEER FU 2				2013-	12-27				dwg	ПО			s	heet	1 o	f 3	size
						engr	BEER FU		U 2013-12-27		FCI		10122975							١, .			
						chr	BEER FU		J	2013-12-27		ı' <u>Ş</u>	7)		1012297					J		M4	
						appd	BEE	R FL	J	2013-	12-27				type CUSTOMER Dr							Dra	wing
sheet index		revi:	sion	Α	Α	Α																	
		sheet		1	2	3																	


form: A4mmXLc


PDS: Rev :A 3


STATUS:Released

Printed: Feb 17/2015

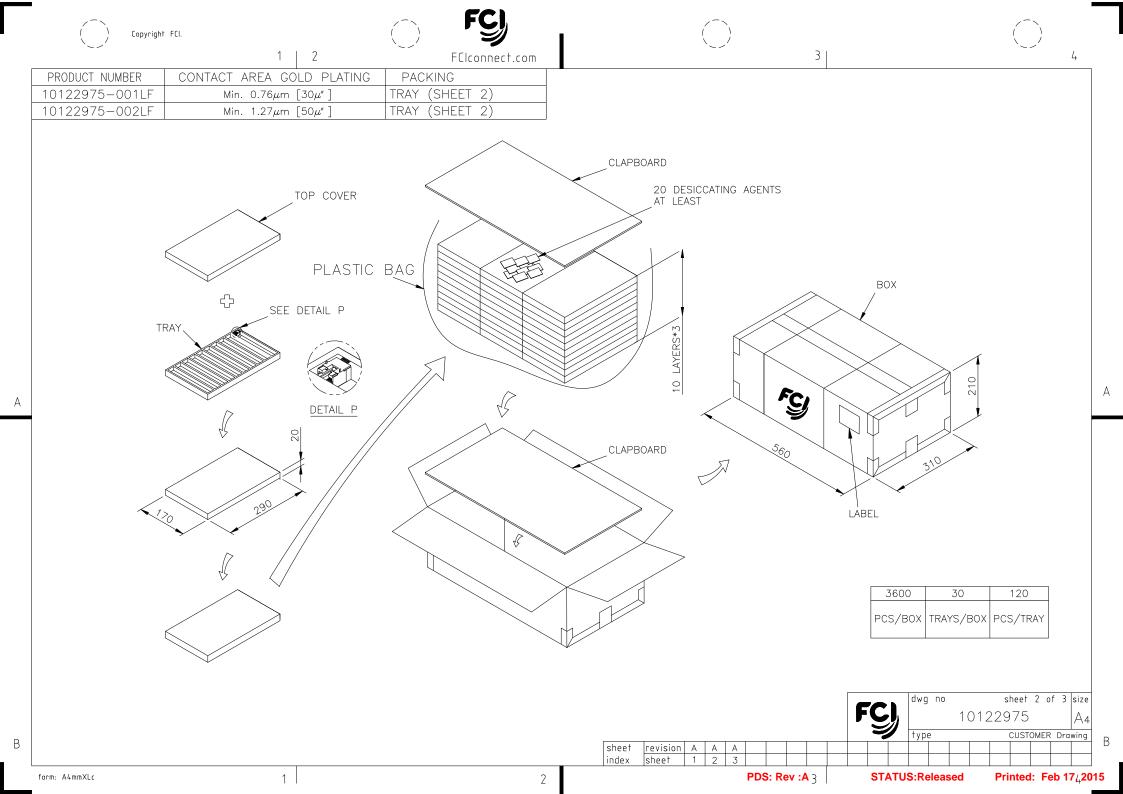




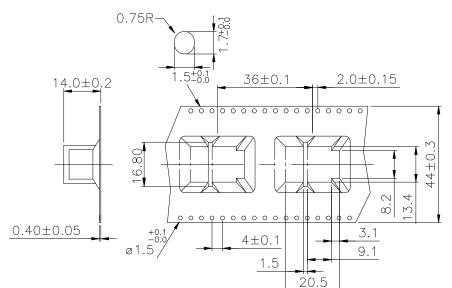

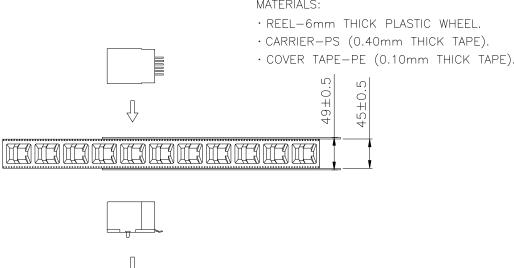



- A. 10 EMPTY CAVITIES FOR BOTH OF TOP AND BOTTOM OF THE CARRIER.
- B. 100 PCS PRODUCTS BE PACKAGED ONE REEL.
 - C. CARTON SIZE: 345(L)X345(W)X315(H)
 6 REEL/CARTON
 TOTAL: 600 PCS

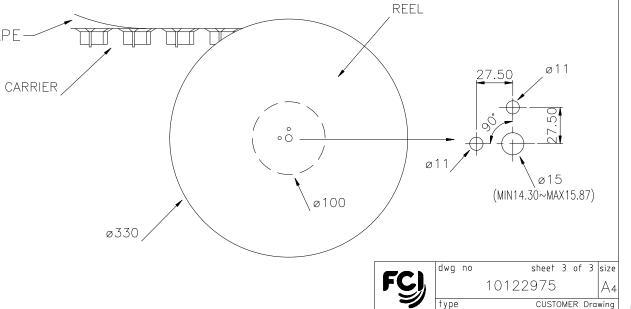

COVER TAPE