



RECOMMENDED PCB LAYOUT
PCB THICKNESS: 3.18mm

CONNECTOR NOTE:

1. HOUSING MATERIAL: HIGH TEMPERATURE THERMOPLASTIC
UL 94V-0, FLAME RETARDANT HALOGEN FREE
2. TERMINAL: COPPER ALLOY
3. CONTACT FINISH REF GS-12-259 SECTION 4.2.2
4. MANUFACTURING CODE REF GS-24-007.

PCB NOTE:

5. ALL THROUGH HOLES ARE LOCATED WITH A TRUE POSITION OF 0.1mm.
6. ALL DIAMETERS ARE FINISHED HLD SIZES.
7. $\varnothing 1.15\text{mm}$ DRILLED HOLES, PLATED WITH 0.007mm MIN. HASL-FREE Pb.
OVER 1.03mm TO 0.08mm Cu PLATING TO ACHIEVE A $1.02\pm 0.07\text{mm}$ HOLE.

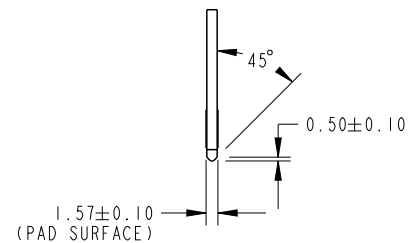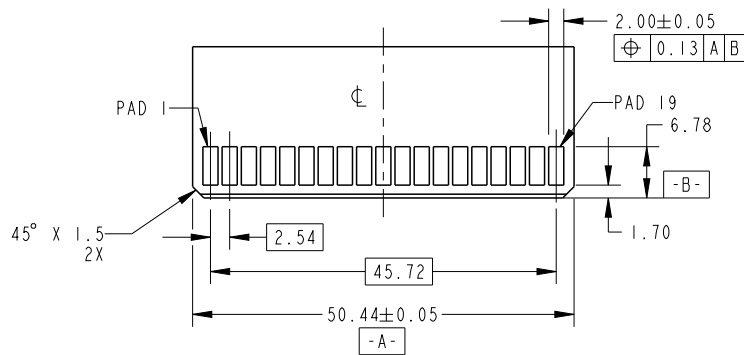

dr	Jackie Huang	2014/05/26	projection 	MM 	size	A4	scale	1:1
eng	Hai-Ling Liu	2014/06/13			ecn no	-		
chr	-	-			rel level	Released		
appr	Pei-Ming Zheng	2014/06/13	product family		rev	10130319-004LF	A	
www.fci.com		cat. no.	*	Product - Customer Drw	sheet 2 of 2			