
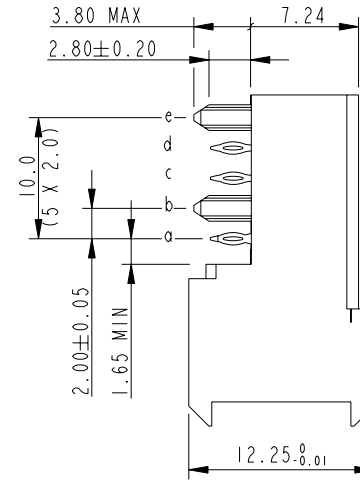
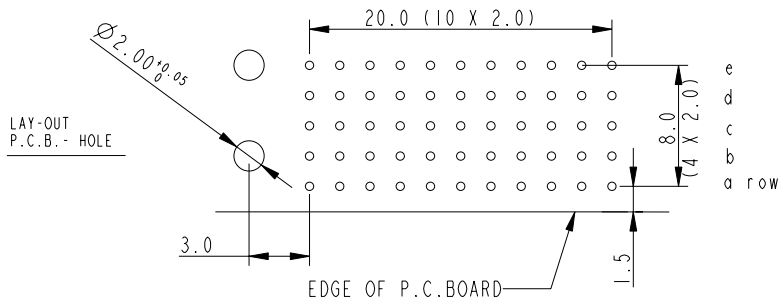
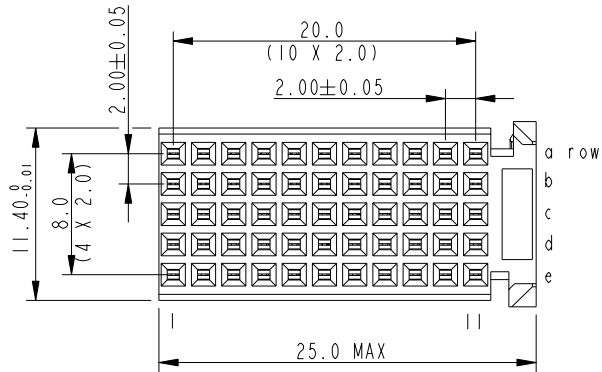


Tous droits strictement réservés. Reproduction ou communication de tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de FCI. Droits de reproduction FCI.

FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

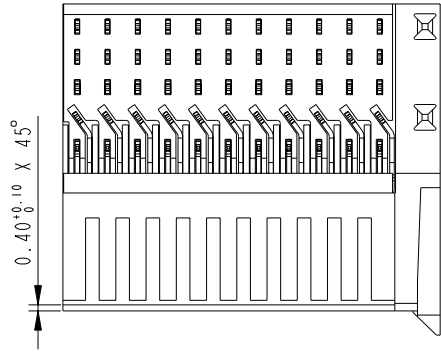

PERFORMANCE CHARACTERISTICS

- SURRENT RATING : 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE 500V AC (CONT / CONT)
- OPERATING TEMPERATURE -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE : 0.75 N MAX /CONT
- EXTRACTION FORCE: 0.15 N MIN /CONT
- INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES

- "-C" PERFORMANCE LEVEL INDICATOR (REF DWG NO.BS,C ,201844,003)
- THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A .201572.001
- THE PRODUCT (C) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008 EXCEPT FOR LEAD.

rev	ecn no	dr	date
A	0005-0262	GuoJM	11-08-05
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

Material		Spec ref		
Mat code		✓	tolerance 1DEC ± 0.2 1DEC 2DEC ± 0.1 2DEC ANGLES ± 1° HOEKEN	projection ↔
Heattreat				
Plating/Finish				
Dr	JM Guo	11-08-05		
Eng	COLLINS LU	11-08-05	Product family	MILLIPACS
Chr	VICTOR LIN	11-08-05	Model Name	HM2R03PA5100--C
Appr	JOSEPH HSIA	11-08-05	Model Revision	
			size	A4
			Scale	2.000
			ECN	DG05-0262
			REL Level	
FCI	title	MPACS 5+2R RA RCP CONN TYPE C (CISCO)		Rev. A
Pro/E file	catalog no	HM2R03PA5100--C	dwg no	BSC201419028
			CUSTOMER DRAWING	sheet 1 of 1