

### **Technical Data Sheet**

## 0805 Package Chip LED (1.1mm Height)

#### 17-21/R6C-AP1Q2L/3T

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free
- Rohs refer to SMD B Type SGS report

#### **Descriptions**

- The 17-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications, etc.

#### **Applications**

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.




#### **Device Selection Guide**

DADEN		Chip	I Cala	
PART No.	Material	<b>Emitted Color</b>	Lens Color	
17-21/R6C-AP1Q2L/3T	AlGaInP	Brilliant Red	Water Clear	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 1 of 10

### **Package Outline Dimensions**

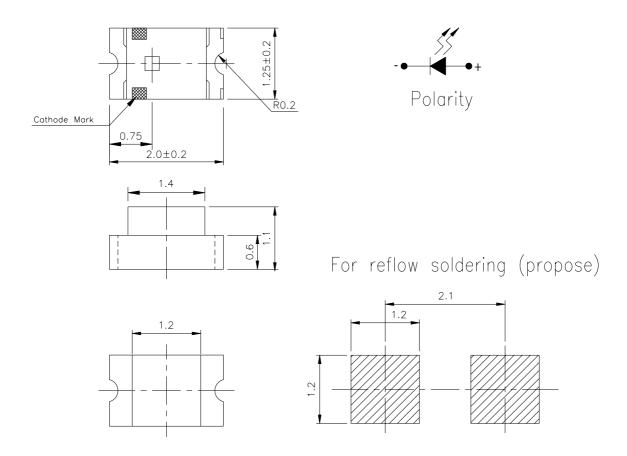

**Note:** The tolerances unless mentioned are  $\pm 0.1$ , unit = mm.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 2 of 10



## **Absolute Maximum Ratings (Ta=25°C)**

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	$I_{\mathrm{F}}$	25	mA
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Electrostatic Discharge	ESD	2000	V
Power Dissipation	$P_d$	60	mW
Peak Forward Current (Duty 1/10 @1KHz)	$ m I_{FP}$	60	mA
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec.  Hand Soldering: 350 °C for 3 sec.	

## **Electro-Optical Characteristics (Ta=25°C)**

				1			
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	$I_V$	45.0		112.0	mcd		
Peak Wavelength	λp		632		nm		
Dominant Wavelength	λd	617.5		633.5	nm		
Spectrum Radiation Bandwidth	Δλ		20		nm	I <sub>F</sub> =20mA	
Viewing Angle	2 \theta 1/2		120		deg		
Forward Voltage	$V_{\mathrm{F}}$	1.70		2.30	V		
Reverse Current	$I_R$			10	$\mu$ A	$V_R=5V$	

#### **Notes:**

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 3 of 10



### Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition
A	E4	617.5	621.5		I <sub>F</sub> =20mA
	E5	621.5	625.5		
	E6	625.5	629.5	nm	
	E7	629.5	633.5		

### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition
DIII	171111	With	Cint	Condition
P1	45.0	57.0	med	I <sub>F</sub> =20mA
P2	57.0	72.0		
Q1	72.0	90.0		
Q2	90.0	112		

#### **Bin Range Of Forward Voltage**

8					
Groups	Bin	Min	Max	Unit	Condition
L	19	1.70	1.80	V	I <sub>F</sub> =20mA
	20	1.80	1.90		
	21	1.90	2.00		
	22	2.00	2.10		
	23	2.10	2.20		
	24	2.20	2.30		

#### **Notes:**


1.Tolerance of Luminous Intensity ±10%


2.Tolerance of Dominant Wavelength ±1nm


3.Tolerance of Forward Voltage ±0.05V


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 4 of 10


#### **Typical Electro-Optical Characteristics Curves**














Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 5 of 10

#### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 




#### **Reel Dimensions**

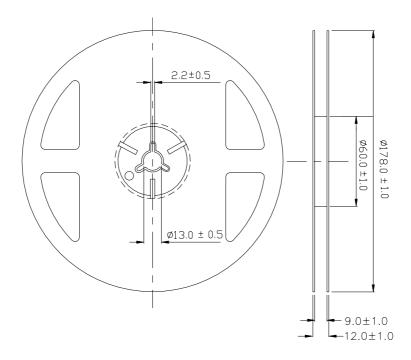

**Note:** The tolerances unless mentioned are  $\pm 0.1$ , unit = mm.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 6 of 10

### Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel

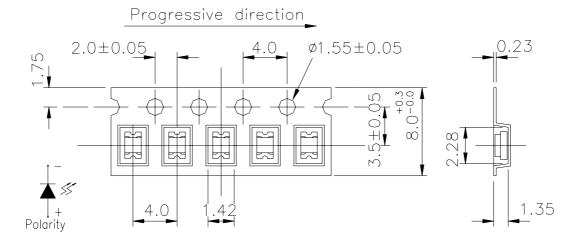

**Note:** The tolerances unless mentioned are  $\pm 0.1$ , unit = mm.

### **Moisture Resistant Packaging**

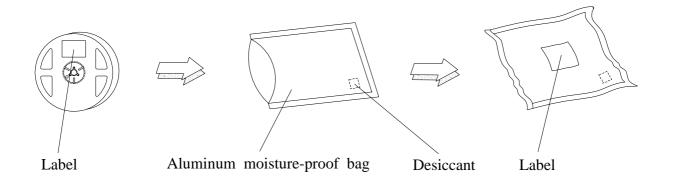

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 7 of 10



### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°€	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°ℂ	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 8 of 10

#### Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

#### 2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and  $70^{\circ}$ RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

  Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

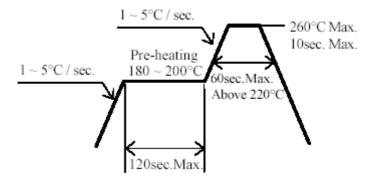

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 9 of 10




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

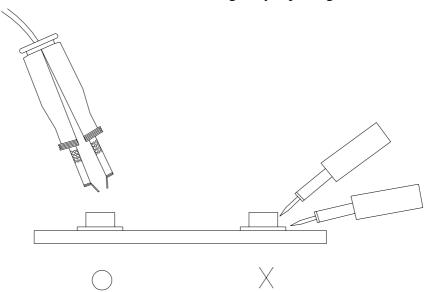

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.: 1 Page: 10 of 10