

56-PIN CK505 W/FULLY INTEGRATED VOLTAGE REGULATOR

ICS9LPR502

Recommended Application:

CK505 compliant clock with fully integrated voltage regulator, PCIe Gen 1 compliant

Output Features:

- 2 - CPU differential low power push-pull pairs
- 7 - SRC differential low power push-pull pairs
- 1 - CPU/SRC selectable differential low power push-pull pair
- 1 - SRC/DOT selectable differential low power push-pull pair
- 5 - PCI, 33MHz
- 1 - PCI_F, 33MHz free running
- 1 - USB, 48MHz
- 1 - REF, 14.318MHz

Key Specifications:

- CPU outputs cycle-cycle jitter < 85ps
- SRC output cycle-cycle jitter < 125ps
- PCI outputs cycle-cycle jitter < 250ps
- +/- 100ppm frequency accuracy on CPU & SRC clocks

Features/Benefits:

- Does not require external pass transistor for voltage regulator
- Supports spread spectrum modulation, default is 0.5% down spread
- Uses external 14.318MHz crystal, external crystal load caps are required for frequency tuning
- One differential push-pull pair selectable between SRC and two single-ended outputs

Table 1: CPU Frequency Select Table

| FS _L C ² B0b7 | FS _L B ¹ B0b6 | FS _L A ¹ B0b5 | CPU MHz | SRC MHz | PCI MHz | REF MHz | USB MHz | DOT MHz |
|--|--|--|------------|------------|------------|------------|------------|------------|
| 0 | 0 | 0 | 266.66 | 100.00 | 33.33 | 14.318 | 48.00 | 96.00 |
| 0 | 0 | 1 | 133.33 | | | | | |
| 0 | 1 | 0 | 200.00 | | | | | |
| 0 | 1 | 1 | 166.66 | | | | | |
| 1 | 0 | 0 | 333.33 | | | | | |
| 1 | 0 | 1 | 100.00 | | | | | |
| 1 | 1 | 0 | 400.00 | | | | | |
| 1 | 1 | 1 | Reserved | | | | | |

1. FS_LA and FS_LB are low-threshold inputs. Please see V_{IL,FS} and V_{IH,FS} specifications in the Input/Supply/Common Output Parameters Table for correct values. Also refer to the Test Clarification Table.
2. FS_LC is a three-level input. Please see the V_{IL,FS} and V_{IH,FS} specifications in the Input/Supply/Common Output Parameters Table for correct values.

Pin Configuration

| | | | |
|----------------|----|----|--------------------|
| PCI0/CR#_A | 1 | 56 | SCLK |
| VDDPCI | 2 | 55 | SDATA |
| PCI1/CR#_B | 3 | 54 | REF0/FSLC/TEST_SEL |
| PCI2/TME | 4 | 53 | VDDREF |
| PCI3 | 5 | 52 | X1 |
| PCI4/SRC5_EN | 6 | 51 | X2 |
| PCI_F5/ITP_EN | 7 | 50 | GNDREF |
| GNDPCI | 8 | 49 | FSLB/TEST_MODE |
| VDD48 | 9 | 48 | CK_PWRGD/PD# |
| USB_48MHz/FSLA | 10 | 47 | VDDCPU |
| GND48 | 11 | 46 | CPUT0 |
| VDDI/O96Mhz | 12 | 45 | CPUC0 |
| DOTT_96/SRCT0 | 13 | 44 | GNDCPU |
| DOTC_96/SRCC0 | 14 | 43 | CPUT1 |
| GND | 15 | 42 | CPUC1 |
| VDD | 16 | 41 | VDDI/OCPU |
| SRCT1/SE1 | 17 | 40 | NC |
| SRCC1/SE2 | 18 | 39 | CPUT2_ITP/SRCT8 |
| GND | 19 | 38 | CPUC2_ITP/SRCC8 |
| VDDPLL3I/O | 20 | 37 | VDDSRCI/O |
| SRCT2/SATAT | 21 | 36 | SRCT7/CR#_F |
| SRCC2/SATAC | 22 | 35 | SRCC7/CR#_E |
| GNDSRC | 23 | 34 | GNDSRC |
| SRCT3/CR#_C | 24 | 33 | SRCT6 |
| SRCC3/CR#_D | 25 | 32 | SRCC6 |
| VDDSRCI/O | 26 | 31 | VDDSRC |
| SRCT4 | 27 | 30 | PCI_STOP#/SRCT5 |
| SRCC4 | 28 | 29 | CPU_STOP#/SRCC5 |

ICS 9LPR502

56-SSOP/TSSOP

SSOP/TSSOP Pin Description

| PIN # | PIN NAME | TYPE | DESCRIPTION |
|-------|----------------|------|---|
| 1 | PCI0/CR#_A | I/O | 3.3V PCI clock output or Clock Request control A for either SRC0 or SRC2 pair The power-up default is PCI0 output, but this pin may also be used as a Clock Request control of SRC pair 0 or SRC pair 2 via SMBus. Before configuring this pin as a Clock Request Pin, the PCI output must first be disabled in byte 2, bit 0 of SMBus address space. After the PCI output is disabled (high-Z), the pin can then be set to serve as a Clock Request pin for either SRC pair 2 or pair 0 using the CR#_A_EN bit located in byte 5 of SMBUs address space. Byte 5, bit 7 0 = PCI0 enabled (default) 1 = CR#_A enabled. Byte 5, bit 6 controls whether CR#_A controls SRC0 or SRC2 pair Byte 5, bit 6 0 = CR#_A controls SRC0 pair (default), 1 = CR#_A controls SRC2 pair |
| 2 | VDDPCI | PWR | Power supply pin for the PCI outputs, 3.3V nominal |
| 3 | PCI1/CR#_B | I/O | 3.3V PCI clock output/Clock Request control B for either SRC1 or SRC4 pair The power-up default is PCI1 output, but this pin may also be used as a Clock Request control of SRC pair 1 or SRC pair 4 via SMBus. Before configuring this pin as a Clock Request Pin, the PCI output must first be disabled in byte 2, bit 1 of SMBus address space. After the PCI output is disabled (high-Z), the pin can then be set to serve as a Clock Request pin for either SRC pair 1 or pair 4 using the CR#_B_EN bit located in byte 5 of SMBUs address space. Byte 5, bit 5 0 = PCI1 enabled (default) 1 = CR#_B enabled. Byte 5, bit 6 controls whether CR#_B controls SRC1 or SRC4 pair Byte 5, bit 4 0 = CR#_B controls SRC1 pair (default) 1 = CR#_B controls SRC4 pair |
| 4 | PCI2/TME | I/O | 3.3V PCI clock output / Trusted Mode Enable (TME) Latched Input. This pin is sampled on power-up as follows 0 = Overclocking of CPU and SRC Allowed 1 = Overclocking of CPU and SRC <u>NOT</u> allowed After being sampled on power-up, this pin becomes a 3.3V PCI Output |
| 5 | PCI3 | OUT | 3.3V PCI clock output. |
| 6 | PCI4/SRC5_EN | I/O | 3.3V PCI clock output / SRC5 pair or PCI_STOP#/CPU_STOP# enable strap. On powerup, the logic value on this pin determines if the SRC5 pair is enabled or if CPU_STOP#/PCI_STOP# is enabled (pins 29 and 30). The latched value controls the pin function on pins 29 and 30 as follows 0 = PCI_STOP#/CPU_STOP# 1 = SRC5/SRC5# |
| 7 | PCI_F5/ITP_EN | I/O | Free running PCI clock output and ITP/SRC8 enable strap. This output is not affected by the state of the PCI_STOP# pin. On powerup, the state of this pin determines whether pins 38 and 39 are an ITP or SRC pair. 0 = SRC8/SRC8# 1 = ITP/ITP# |
| 8 | GNDPCI | PWR | Ground for PCI clocks. |
| 9 | VDD48 | PWR | Power supply for USB clock, nominal 3.3V. |
| 10 | USB_48MHz/FSLA | I/O | Fixed 48MHz USB clock output. 3.3V/ 3.3V tolerant input for CPU frequency selection. Refer to input electrical characteristics for V _{IL_FS} and V _{IH_FS} values. |
| 11 | GND48 | PWR | Ground pin for the 48MHz outputs. |
| 12 | VDD96_IO | PWR | Power supply for DOT96 output. 1.05 to 3.3V +/-5%. |
| 13 | DOTT_96/SRCT0 | OUT | True clock of SRC or DOT96. The power-up default function is SRC0. After powerup, this pin function may be changed to DOT96 via SMBus Byte 1, bit 7 as follows: 0 = SRC0 1 = DOT96 |
| 14 | DOTC_96/SRCC0 | OUT | Complement clock of SRC or DOT96. The power-up default function is SRC0#. After powerup, this pin function may be changed to DOT96# via SMBus Byte 1, bit 7 as follows 0 = SRC0# 1 = DOT96# |
| 15 | GND | PWR | Ground pin for the DOT96 clocks. |
| 16 | VDD | PWR | Power supply for SRC / SE1 and SE2 clocks, 3.3V nominal. |

SSOP/TSSOP Pin Description (continued)

| PIN # | PIN NAME | TYPE | DESCRIPTION |
|-------|-------------|------|---|
| 17 | SRCT1/SE1 | OUT | True clock of differential SRC1 clock pair / 3.3V single-ended output. The powerup default is 100 MHz SRC, -0.5% downspread. The pin function may be changed via SMBus B1b[4:1] |
| 18 | SRCC1/SE2 | OUT | Complement clock of differential SRC1 clock pair / 3.3V single-ended output. The powerup default is 100 MHz SRC, -0.5% downspread. The pin function may be changed via SMBus B1b[4:1] |
| 19 | GND | PWR | Ground pin for SRC / SE1 and SE2 clocks, PLL3. |
| 20 | VDDPLL3_IO | PWR | Power supply for PLL3 output. 1.05 to 3.3V +/-5%. |
| 21 | SRCT2/SATAT | OUT | True clock of differential SRC/SATA clock pair. |
| 22 | SRCC2/SATAC | OUT | Complement clock of differential SRC/SATA clock pair. |
| 23 | GNDSRC | PWR | Ground pin for SRC clocks. |
| 24 | SRCT3/CR#_C | I/O | <p>True clock of differential SRC clock pair/ Clock Request control C for either SRC0 or SRC2 pair The power-up default is SRCCLK3 output, but this pin may also be used as a Clock Request control of SRC pair 0 or SRC pair 2 via SMBus. Before configuring this pin as a Clock Request Pin, the SRC3 output must first be disabled in byte 4, bit 7 of SMBus address space . After the SRC3 output is disabled, the pin can then be set to serve as a Clock Request pin for either SRC pair 2 or pair 0 using the CR#_C_EN bit located in byte 5 of SMBUS address space.</p> <p>Byte 5, bit 3 0 = SRC3 enabled (default) 1= CR#_C enabled. Byte 5, bit 2 controls whether CR#_C controls SRC0 or SRC2 pair</p> <p>Byte 5, bit 2 0 = CR#_C controls SRC0 pair (default), 1= CR#_C controls SRC2 pair</p> |
| 25 | SRCC3/CR#_D | I/O | <p>Complementary clock of differential SRC clock pair/ Clock Request control D for either SRC1 or SRC4 pair The power-up default is SRCCLK3 output, but this pin may also be used as a Clock Request control of SRC pair 1 or SRC pair 4 via SMBus. Before configuring this pin as a Clock Request Pin, the SRC3 output must first be disabled in byte 4, bit 7 of SMBus address space . After the SRC3 output is disabled, the pin can then be set to serve as a Clock Request pin for either SRC pair 1 or pair 4 using the CR#_D_EN bit located in byte 5 of SMBUS address space.</p> <p>Byte 5, bit 1 0 = SRC3 enabled (default) 1= CR#_D enabled. Byte 5, bit 0 controls whether CR#_D controls SRC1 or SRC4 pair</p> <p>Byte 5, bit 0 0 = CR#_D controls SRC1 pair (default), 1= CR#_D controls SRC4 pair</p> |
| 26 | VDDSRC_IO | PWR | Power supply for SRC clocks. 1.05 to 3.3V +/-5%. |
| 27 | SRCT4 | I/O | True clock of differential SRC clock pair 4 |
| 28 | SRCC4 | I/O | Complement clock of differential SRC clock pair 4 |


SSOP/TSSOP Pin Description (Continued)

| PIN # | PIN NAME | TYPE | DESCRIPTION |
|-------|-----------------|------|--|
| 29 | CPU_STOP#/SRCC5 | I/O | Stops all CPU Clocks, except those set to be free running clocks / Complement clock of differential SRC pair. The function of this pin is set up by the power-up strap on pin 6, PCI4/SRC5_EN. The logic value sampled on pin 6 at power-up sets the function as follows: 0= CPU_STOP# 1 = SRC5 In AMT mode 3 bits are shifted in from the ICH to set the FSC, FSB, FSA values |
| 30 | PCI_STOP#/SRCT5 | I/O | Stops all PCI Clocks, except those set to be free running clocks / Complement clock of differential SRC pair. The function of this pin is set up by the power-up strap on pin 6, PCI4/SRC5_EN. The logic value sampled on pin 6 at power-up sets the function as follows: 0= PCI_STOP# 1 = SRC5# In AMT mode, this pin is a clock input which times the FSC, FSB, FSA bits shifted in on pin 37. |
| 31 | VDDSRC | PWR | VDD pin for SRC Pre-drivers, 3.3V nominal |
| 32 | SRCC6 | OUT | Complement clock of low power differential SRC clock pair. |
| 33 | SRCT6 | OUT | True clock of low power differential SRC clock pair. |
| 34 | GNDSRC | PWR | Ground for SRC clocks |
| 35 | SRCC7/CR#_E | I/O | SRC7 complement or Clock Request control E for SRC6 pair The power-up default is SRC7#, but this pin may also be used as a Clock Request control of SRC6 via SMBus. Before configuring this pin as a Clock Request Pin, the SRC7 output pair must first be disabled in byte 3, bit 3 of SMBus configuration space . After the SRC output is disabled (high-Z), the pin can then be set to serve as a Clock Request for SRC6 pair using byte 6, bit 7 of SMBus configuration space Byte 6, bit 7 0 = SRC7# enabled (default) 1= CR#_E controls SRC6. |
| 36 | SRCT7/CR#_F | I/O | SRC7 true or Clock Request control 8 for SRC8 pair The power-up default is SRC7, but this pin may also be used as a Clock Request control of SRC8 via SMBus. Before configuring this pin as a Clock Request Pin, the SRC7 output pair must first be disabled in byte 3, bit 3 of SMBus configuration space After the SRC output is disabled (high-Z), the pin can then be set to serve as a Clock Request for SRC8 pair using byte 6, bit 6 of SMBus configuration space Byte 6, bit 6 0 = SRC7# enabled (default) 1 = CR#_F controls SRC8. |
| 37 | VDDSRC_IO | PWR | Power supply for SRC outputs. 1.05 to 3.3V +/-5%. |
| 38 | CPUC2_ITP/SRCC8 | OUT | Complement clock of low power differential CPU2/Complement clock of differential SRC pair. The function of this pin is determined by the latched input value on pin 7, PCIF5/ITP_EN on powerup. The function is as follows: Pin 7 latched input Value 0 = SRC8# 1 = ITP# |
| 39 | CPUT2_ITP/SRCT8 | OUT | True clock of low power differential CPU2/True clock of differential SRC pair. The function of this pin is determined by the latched input value on pin 7, PCIF5/ITP_EN on powerup. The function is as follows: Pin 7 latched input Value 0 = SRC8 1 = ITP |
| 40 | NC | N/A | No Connect |
| 41 | VDDCPU_IO | PWR | Supply for CPU outputs. 1.05 to 3.3V +/-5%. |
| 42 | CPUC1_F | OUT | Complement clock of low power differential CPU clock pair. This clock will be free-running during iAMT. |
| 43 | CPUT1_F | OUT | True clock of low power differential CPU clock pair. This clock will be free-running during iAMT. |
| 44 | GNDCPU | PWR | Ground Pin for CPU Outputs |
| 45 | CPUC0 | OUT | Complement clock of low power differential CPU clock pair. |
| 46 | CPUT0 | OUT | True clock of low power differential CPU clock pair. |
| 47 | VDDCPU | PWR | Power Supply 3.3V nominal. |


SSOP/TSSOP Pin Description (Continued)

| PIN # | PIN NAME | TYPE | DESCRIPTION |
|-------|--------------------|------|---|
| 48 | CK_PWRGD/PD# | IN | Notifies CK505 to sample latched inputs, or iAMT entry/exit, or PWRDWN# mode |
| 49 | FSLB/TEST_MODE | IN | 3.3V tolerant input for CPU frequency selection. Refer to input electrical characteristics for V_{iL_FS} and V_{iH_FS} values. TEST_MODE is a real time input to select between Hi-Z and REF/N divider mode while in test mode. Refer to Test Clarification Table. |
| 50 | GNDREF | PWR | Ground pin for crystal oscillator circuit |
| 51 | X2 | OUT | Crystal output, nominally 14.318MHz. |
| 52 | X1 | IN | Crystal input, Nominally 14.318MHz. |
| 53 | VDDREF | PWR | Power pin for the REF outputs, 3.3V nominal. |
| 54 | REF0/FSLC/TEST_SEL | I/O | 3.3V 14.318MHz reference clock/3.3V tolerant low threshold input for CPU frequency selection. Refer to input electrical characteristics for V_{iL_FS} and V_{iH_FS} values/ TEST_SEL: 3-level latched input to enable test mode. Refer to Test Clarification Table. |
| 55 | SDATA | I/O | Data pin for SMBus circuitry, 5V tolerant. |
| 56 | SCLK | IN | Clock pin of SMBus circuitry, 5V tolerant. |

Fully Integrated Regulator Connection for Desktop/Mobile Applications

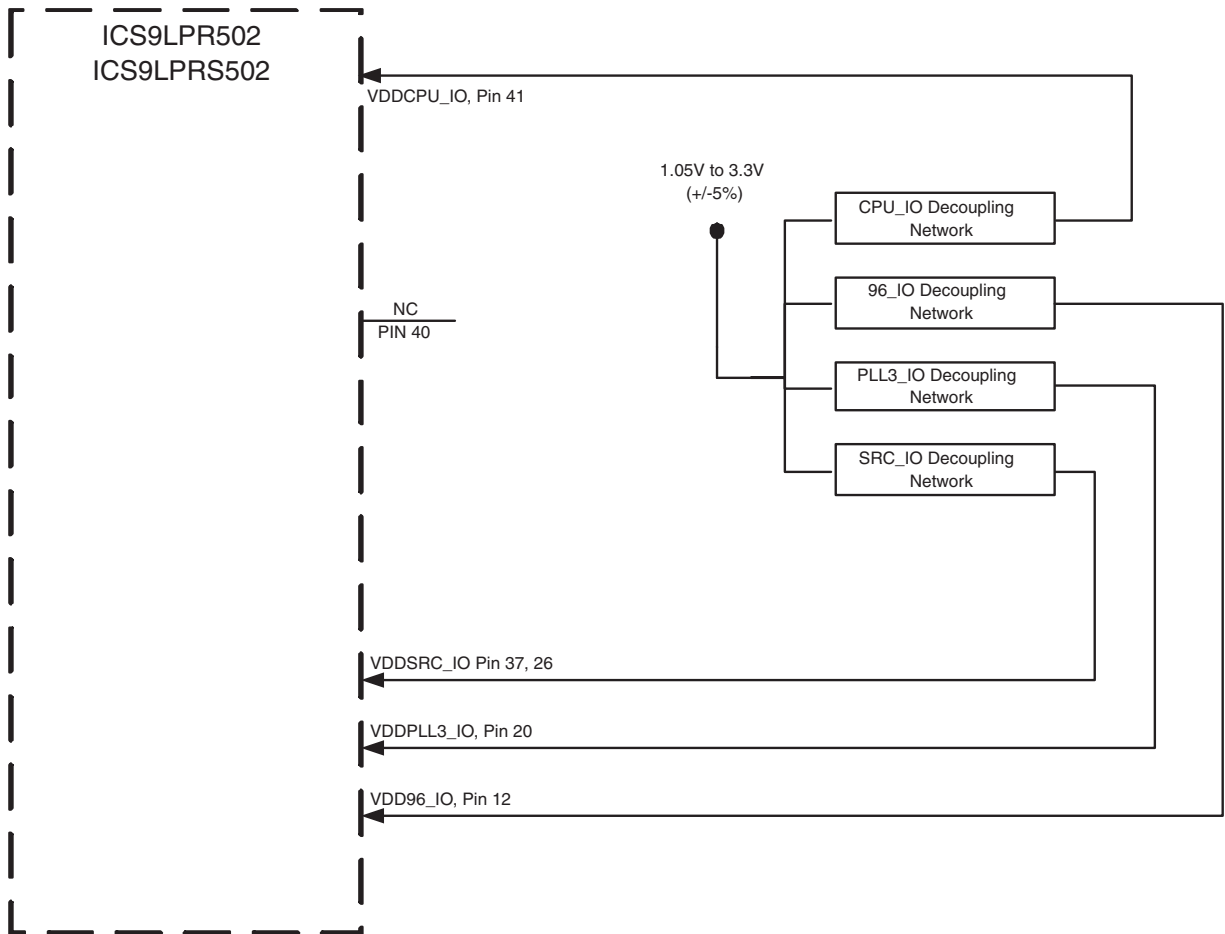

SSOP/TSSOP Pin Description (Continued)

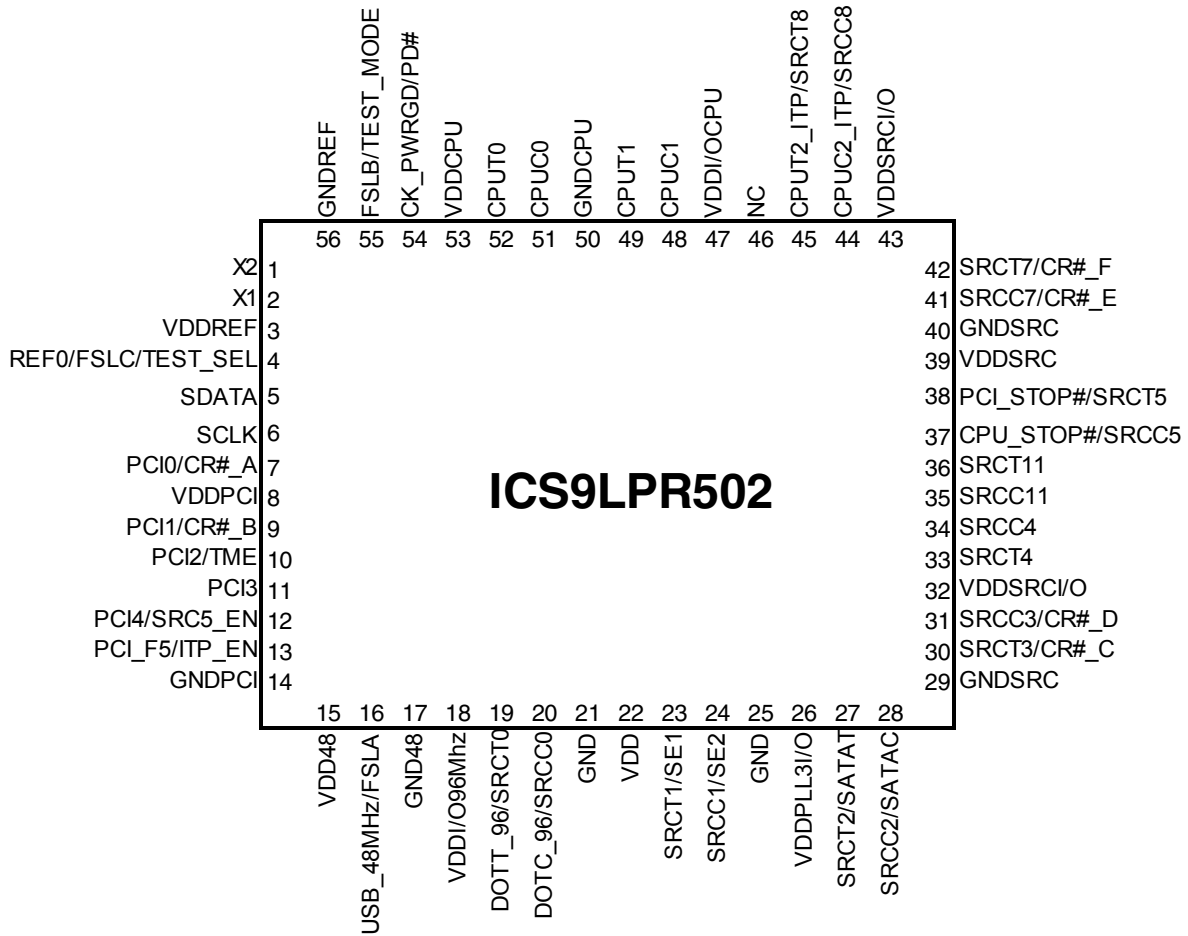

56-pin MLF

MLF Pin Description

| PIN # | PIN NAME | TYPE | DESCRIPTION |
|-------|--------------------|------|--|
| 1 | X2 | OUT | Crystal output, nominally 14.318MHz. |
| 2 | X1 | IN | Crystal input, Nominally 14.318MHz. |
| 3 | VDDREF | PWR | Power pin for the REF outputs, 3.3V nominal. |
| 4 | REF0/FSLC/TEST_SEL | I/O | 3.3V 14.318MHz reference clock/3.3V tolerant low threshold input for CPU frequency selection. Refer to input electrical characteristics for V_{il_FS} and V_{ih_FS} values/ TEST_SEL: 3-level latched input to enable test mode. Refer to Test Clarification Table. |
| 5 | SDATA | I/O | Data pin for SMBus circuitry, 5V tolerant. |
| 6 | SCLK | IN | Clock pin of SMBus circuitry, 5V tolerant. |
| 7 | PCI0/CR#_A | I/O | 3.3V PCI clock output or Clock Request control A for either SRC0 or SRC2 pair The power-up default is PCI0 output, but this pin may also be used as a Clock Request control of SRC pair 0 or SRC pair 2 via SMBus. Before configuring this pin as a Clock Request Pin, the PCI output must first be disabled in byte 2, bit 0 of SMBus address space . After the PCI output is disabled (high-Z), the pin can then be set to serve as a Clock Request pin for either SRC pair 2 or pair 0 using the CR#_A_EN bit located in byte 5 of SMBus address space. Byte 5, bit 7 0 = PCI0 enabled (default) 1= CR#_A enabled. Byte 5, bit 6 controls whether CR#_A controls SRC0 or SRC2 pair Byte 5, bit 6 0 = CR#_A controls SRC0 pair (default), 1= CR#_A controls SRC2 pair |
| 8 | VDDPCI | PWR | Power supply pin for the PCI outputs, 3.3V nominal |
| 9 | PCI1/CR#_B | I/O | 3.3V PCI clock output/Clock Request control B for either SRC1 or SRC4 pair The power-up default is PCI1 output, but this pin may also be used as a Clock Request control of SRC pair 1 or SRC pair 4 via SMBus. Before configuring this pin as a Clock Request Pin, the PCI output must first be disabled in byte 2, bit 1 of SMBus address space . After the PCI output is disabled (high-Z), the pin can then be set to serve as a Clock Request pin for either SRC pair 1 or pair 4 using the CR#_B_EN bit located in byte 5 of SMBus address space. Byte 5, bit 5 0 = PCI1 enabled (default) 1= CR#_B enabled. Byte 5, bit 6 controls whether CR#_B controls SRC1 or SRC4 pair Byte 5, bit 4 0 = CR#_B controls SRC1 pair (default) 1= CR#_B controls SRC4 pair |
| 10 | PCI2/TME | I/O | 3.3V PCI clock output / Trusted Mode Enable (TME) Latched Input. This pin is sampled on power-up as follows 0 = Overclocking of CPU and SRC Allowed 1 = Overclocking of CPU and SRC NOT allowed After being sampled on power-up, this pin becomes a 3.3V PCI Output |
| 11 | PCI3 | OUT | 3.3V PCI clock output. |
| 12 | PCI4/SRC5_EN | I/O | 3.3V PCI clock output / SRC5 pair or PCI_STOP#/CPU_STOP# enable strap. On powerup, the logic value on this pin determines if the SRC5 pair is enabled or if CPU_STOP#/PCI_STOP# is enabled (pins 29 and 30). The latched value controls the pin function on pins 29 and 30 as follows 0 = PCI_STOP#/CPU_STOP# 1 = SRC5/SRC5# |
| 13 | PCI_F5/ITP_EN | I/O | Free running PCI clock output and ITP/SRC8 enable strap. This output is not affected by the state of the PCI_STOP# pin. On powerup, the state of this pin determines whether pins 38 and 39 are an ITP or SRC pair. 0 =SRC8/SRC8# 1 = ITP/ITP# |
| 14 | GNDPCI | PWR | Ground for PCI clocks. |

MLF Pin Description (Continued)

| PIN # | PIN NAME | TYPE | DESCRIPTION |
|-------|----------------|------|--|
| 15 | VDD48 | PWR | Power supply for USB clock, nominal 3.3V. |
| 16 | USB_48MHz/FSLA | I/O | Fixed 48MHz USB clock output. 3.3V./ 3.3V tolerant input for CPU frequency selection. Refer to input electrical characteristics for V_{il_FS} and V_{ih_FS} values. |
| 17 | GND48 | PWR | Ground pin for the 48MHz outputs. |
| 18 | VDD96_IO | PWR | Power supply for DOT96 output. 1.05 to 3.3V +/-5%. |
| 19 | DOTT_96/SRCT0 | OUT | True clock of SRC or DOT96. The power-up default function is SRC0. After powerup, this pin function may be changed to DOT96 via SMBus Byte 1, bit 7 as follows: 0= SRC0 1=DOT96 |
| 20 | DOTC_96/SRCC0 | OUT | Complement clock of SRC or DOT96. The power-up default function is SRC0#. After powerup, this pin function may be changed to DOT96# via SMBus Byte 1, bit 7 as follows 0= SRC0# 1=DOT96# |
| 21 | GND | PWR | Ground pin for the DOT96 clocks. |
| 22 | VDD | PWR | Power supply for SRC / SE1 and SE2 clocks, 3.3V nominal. |
| 23 | SRCT1/SE1 | OUT | True clock of differential SRC1 clock pair / 3.3V single-ended output. The powerup default is 100 MHz SRC, -0.5% downspread. The pin function may be changed via SMBus B1b[4:1] |
| 24 | SRCC1/SE2 | OUT | Complement clock of differential SRC1 clock pair / 3.3V single-ended output. The powerup default is 100 MHz SRC, -0.5% downspread. The pin function may be changed via SMBus B1b[4:1] |
| 25 | GND | PWR | Ground pin for SRC / SE1 and SE2 clocks, PLL3. |
| 26 | VDDPLL3_IO | PWR | Power supply for PLL3 output. 1.05 to 3.3V +/-5%. |
| 27 | SRCT2/SATAT | OUT | True clock of differential SRC/SATA clock pair. |
| 28 | SRCC2/SATAC | OUT | Complement clock of differential SRC/SATA clock pair. |

MLF Pin Description (Continued)

| PIN # | PIN NAME | TYPE | DESCRIPTION |
|-------|-----------------|------|---|
| 29 | GNDSRC | PWR | Ground pin for SRC clocks. |
| 30 | SRCT3/CR#_C | I/O | True clock of differential SRC clock pair/ Clock Request control C for either SRC0 or SRC2 pair The power-up default is SRCCLK3 output, but this pin may also be used as a Clock Request control of SRC pair 0 or SRC pair 2 via SMBus. Before configuring this pin as a Clock Request Pin, the SRC3 output must first be disabled in byte 4, bit 7 of SMBus address space . After the SRC3 output is disabled, the pin can then be set to serve as a Clock Request pin for either SRC pair 2 or pair 0 using the CR#_C_EN bit located in byte 5 of SMBUS address space. Byte 5, bit 3 0 = SRC3 enabled (default) 1= CR#_C enabled. Byte 5, bit 2 controls whether CR#_C controls SRC0 or SRC2 pair Byte 5, bit 2 0 = CR#_C controls SRC0 pair (default), 1= CR#_C controls SRC2 pair |
| 31 | SRCC3/CR#_D | I/O | Complementary clock of differential SRC clock pair/ Clock Request control D for either SRC1 or SRC4 pair The power-up default is SRCCLK3 output, but this pin may also be used as a Clock Request control of SRC pair 1 or SRC pair 4 via SMBus. Before configuring this pin as a Clock Request Pin, the SRC3 output must first be disabled in byte 4, bit 7 of SMBus address space . After the SRC3 output is disabled, the pin can then be set to serve as a Clock Request pin for either SRC pair 1 or pair 4 using the CR#_D_EN bit located in byte 5 of SMBUS address space. Byte 5, bit 1 0 = SRC3 enabled (default) 1= CR#_D enabled. Byte 5, bit 0 controls whether CR#_D controls SRC1 or SRC4 pair Byte 5, bit 0 0 = CR#_D controls SRC1 pair (default), 1= CR#_D controls SRC4 pair |
| 32 | VDDSRC_IO | PWR | Power supply for SRC outputs. 1.05 to 3.3V +/-5%. |
| 33 | SRCT4 | I/O | True clock of differential SRC clock pair 4 |
| 34 | SRCC4 | I/O | Complement clock of differential SRC clock pair 4 |
| 35 | SRCC11 | OUT | Complement clock of low power differential SRC clock pair. |
| 36 | SRCT11 | OUT | True clock of low power differential SRC clock pair. |
| 37 | CPU_STOP#/SRCC5 | I/O | Stops all CPU Clocks, except those set to be free running clocks / Complement clock of differential SRC pair. The function of this pin is set up by the power-up strap on pin 6, PCI4/SRC5_EN. The logic value sampled on pin 6 at power-up sets the function as follows: 0= CPU_STOP# 1 = SRC5 In AMT mode 3 bits are shifted in from the ICH to set the FSC, FSB, FSA values |
| 38 | PCI_STOP#/SRCT5 | I/O | Stops all PCI Clocks, except those set to be free running clocks / Complement clock of differential SRC pair. The function of this pin is set up by the power-up strap on pin 6, PCI4/SRC5_EN. The logic value sampled on pin 6 at power-up sets the function as follows: 0= PCI_STOP# 1 = SRC5# In AMT mode, this pin is a clock input which times the FSC, FSB, FSA bits shifted in on pin 37. |
| 39 | VDDSRC | PWR | VDD pin for SRC Pre-drivers, 3.3V nominal |
| 40 | GNDSRC | PWR | Ground for SRC clocks |
| 41 | SRCC7/CR#_E | I/O | SRC7 complement or Clock Request control E for SRC6 pair The power-up default is SRC7#, but this pin may also be used as a Clock Request control of SRC6 via SMBus. Before configuring this pin as a Clock Request Pin, the SRC7 output pair must first be disabled in byte 3, bit 3 of SMBus configuration space . After the SRC output is disabled (high-Z), the pin can then be set to serve as a Clock Request for SRC6 pair using byte 6, bit 7 of SMBus configuration space Byte 6, bit 7 0 = SRC7# enabled (default) 1= CR#_E controls SRC6. |
| 42 | SRCT7/CR#_F | I/O | SRC7 true or Clock Request control 8 for SRC8 pair The power-up default is SRC7, but this pin may also be used as a Clock Request control of SRC8 via SMBus. Before configuring this pin as a Clock Request Pin, the SRC7 output pair must first be disabled in byte 3, bit 3 of SMBus configuration space After the SRC output is disabled (high-Z), the pin can then be set to serve as a Clock Request for SRC8 pair using byte 6, bit 6 of SMBus configuration space Byte 6, bit 6 0 = SRC7# enabled (default) 1 = CR#_F controls SRC8. |


MLF Pin Description (Continued)

| PIN # | PIN NAME | TYPE | DESCRIPTION |
|-------|-----------------|------|---|
| 43 | VDDSRC_IO | PWR | Power supply for SRC outputs. 1.05 to 3.3V +/-5%. |
| 44 | CPUC2_ITP/SRCC8 | OUT | Complement clock of low power differential CPU2/Complement clock of differential SRC pair. The function of this pin is determined by the latched input value on pin 7, PCIF5/ITP_EN on powerup. The function is as follows: Pin 7 latched input Value 0 = SRC8# 1 = ITP# |
| 45 | CPUT2_ITP/SRCT8 | OUT | True clock of low power differential CPU2/True clock of differential SRC pair. The function of this pin is determined by the latched input value on pin 7, PCIF5/ITP_EN on powerup. The function is as follows: Pin 7 latched input Value 0 = SRC8 1 = ITP |
| 46 | NC | NC | Not Connected |
| 47 | VDDCPU_IO | PWR | Power supply for CPU outputs. 1.05 to 3.3V +/-5%. |
| 48 | CPUC1_F | OUT | Complement clock of low power differential CPU clock pair. This clock will be free-running during iAMT. |
| 49 | CPUT1_F | OUT | True clock of low power differential CPU clock pair. This clock will be free-running during iAMT. |
| 50 | GNDCPU | PWR | Ground Pin for CPU Outputs |
| 51 | CPUC0 | OUT | Complement clock of low power differential CPU clock pair. |
| 52 | CPUT0 | OUT | True clock of low power differential CPU clock pair. |
| 53 | VDDCPU | PWR | Power Supply 3.3V nominal. |
| 54 | CK_PWRGD/PD# | IN | Notifies CK505 to sample latched inputs, or iAMT entry/exit, or PWRDWN# mode |
| 55 | FSLB/TEST_MODE | IN | 3.3V tolerant input for CPU frequency selection. Refer to input electrical characteristics for V_{il_FS} and V_{ih_FS} values. TEST_MODE is a real time input to select between Hi-Z and REF/N divider mode while in test mode. Refer to Test Clarification Table. |
| 56 | GNDREF | PWR | Ground pin for crystal oscillator circuit |

General Description

ICS9LPR502 follows Intel CK505 Yellow Cover specification. This clock synthesizer provides a single chip solution for next generation Intel processors and Intel chipsets. ICS9LPR502 is driven with a 14.318MHz crystal. It also provides a tight ppm accuracy output for Serial ATA and PCI-Express support.

Functional Block Diagram

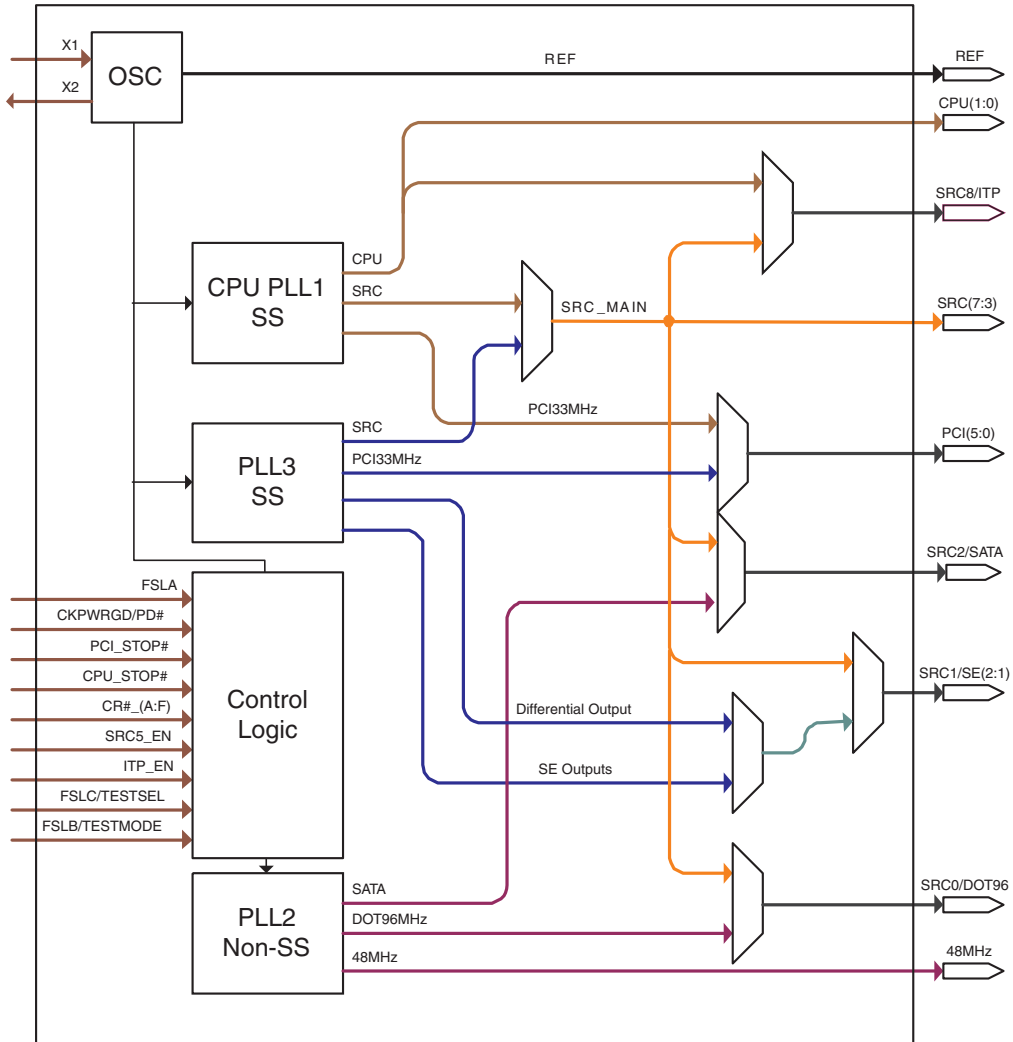

Power Groups

| Pin Number | | Description | |
|------------|-------|----------------------|-------------------|
| VDD | GND | | |
| 41 | 44 | CPUCLK | Low power outputs |
| 47 | 44 | Master Clock, Analog | |
| 26, 37 | 23,34 | SRCCLK | Low power outputs |
| 31 | 23,34 | | PLL 1 |
| 20 | 19 | PLL3/SE | Low power outputs |
| 16 | 19 | | PLL 3 |
| 12 | 11 | DOT 96Mhz | Low power outputs |
| 9 | 11 | USB 48 | |
| 53 | 50 | Xtal, REF | |
| 2 | 8 | PCICLK | |

Absolute Maximum Ratings - DC Parameters

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | Notes |
|------------------------|-----------------|-------------------------------------|-----------|-----|-------|-------|
| Maximum Supply Voltage | VDDxxx | Supply Voltage | | 4.6 | V | 7 |
| Maximum Supply Voltage | VDDxxx_IO | Low-Voltage Differential I/O Supply | | 3.8 | V | 7 |
| Maximum Input Voltage | V _{IH} | 3.3V Inputs | | 4.6 | V | 4,5,7 |
| Minimum Input Voltage | V _{IL} | Any Input | GND - 0.5 | | V | 4,7 |
| Storage Temperature | T _s | - | -65 | 150 | °C | 4,7 |
| Input ESD protection | ESD prot | Human Body Model | 2000 | | V | 6,7 |

¹Guaranteed by design and characterization, not 100% tested in production.

²Operation under these conditions is neither implied, nor guaranteed.

³Maximum input voltage is not to exceed VDD

Electrical Characteristics - Input/Supply/Common Output DC Parameters

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | Notes |
|---|-------------------------|---|-----------------------|-----------------------|-------|-------|
| Ambient Operating Temp | T _{ambient} | - | 0 | 70 | °C | |
| Supply Voltage | VDDxxx | Supply Voltage | 3.135 | 3.465 | V | |
| Supply Voltage | VDDxxx_IO | Low-Voltage Differential I/O Supply | 0.9975 | 3.465 | V | 10 |
| Input High Voltage | V _{IHSE} | Single-ended 3.3V inputs | 2 | V _{DD} + 0.3 | V | 3 |
| Input Low Voltage | V _{ILSE} | Single-ended 3.3V inputs | V _{SS} - 0.3 | 0.8 | V | 3 |
| Low Threshold Input- High Voltage | V _{IH_FS_TEST} | 3.3 V +/-5% | 2 | VDD + 0.3 | V | 8 |
| Low Threshold Input- FSC = '1' Voltage | V _{IH_FS_FSC} | 3.3 V +/-5% | 0.7 | 1.5 | V | 8 |
| Low Threshold Input- FSA,FSB = '1' Voltage | V _{IH_FS_FSAB} | 3.3 V +/-5% | 0.7 | VDD+0.3 | V | |
| Low Threshold Input-Low Voltage | V _{IL_FS} | 3.3 V +/-5% | V _{SS} - 0.3 | 0.35 | V | |
| PCI3/CFG0 Input | V _{IL_CFGHI} | Optional input, 2.75V typ. | 2.4 | VDD+0.3 | V | 9 |
| PCI3/CFG0 Input | V _{IL_CFGMID} | Optional input, 1.65V typ. | 1.3 | 2 | V | 9 |
| PCI3/CFG0 Input | V _{IL_CFGLO} | Optional input, 0.55V typ. | V _{SS} - 0.3 | 0.9 | V | 9 |
| Input Leakage Current | I _{IN} | V _{IN} = V _{DD} , V _{IN} = GND | -5 | 5 | uA | 2 |
| Input Leakage Current | I _{INRES} | Inputs with pull up or pull down resistors V _{IN} = V _{DD} , V _{IN} = GND | -200 | 200 | uA | |
| Output High Voltage | V _{OHSE} | Single-ended outputs, I _{OH} = -1mA | 2.4 | | V | 1 |
| Output Low Voltage | V _{OLSE} | Single-ended outputs, I _{OL} = 1 mA | | 0.4 | V | 1 |
| Operating Supply Current | I _{DDOP3.3} | Full Active, C _L = Full load; I _{DD} 3.3V | | 200 | mA | |
| | I _{DDPIO} | Full Active, C _L = Full load; I _{DD} IO | | 70 | mA | 10 |
| iAMT Mode Current | I _{DDIAMT3.3} | M1 mode, 3.3V Rail | | 80 | mA | |
| | I _{DDIAMTIO} | M1 Mode, IO Rail | | 10 | mA | |
| Powerdown Current | I _{DDPD3.3} | Power down mode, 3.3V Rail | | 5 | mA | |
| | I _{DDPDIO} | Power down mode, IO Rail | | 0.1 | mA | 10 |
| Input Frequency | F _i | V _{DD} = 3.3 V | | 15 | MHz | |
| Pin Inductance | L _{pin} | | | 7 | nH | |
| Input Capacitance | C _{IN} | Logic Inputs | 1.5 | 5 | pF | |
| | C _{OUT} | Output pin capacitance | | 6 | pF | |
| | C _{INX} | X1 & X2 pins | | 6 | pF | |
| Clk Stabilization | T _{STAB} | From VDD Power-Up or de-assertion of PD to 1st clock | | 1.8 | ms | |
| Tdrive_CR_off | T _{DRCROFF} | Output stop after CR deasserted | | 400 | ns | |
| Tdrive_CR_on | T _{DRCRON} | Output run after CR asserted | | 0 | us | |
| Tdrive_CPU | T _{DRSRC} | CPU output enable after PCI_STOP# de-assertion | | 10 | ns | |
| Tfall_SE | T _{FALL} | Fall/rise time of all 3.3V control inputs from 20-80% | | 10 | ns | |
| Trise_SE | T _{RISE} | | | 10 | ns | |
| SMBus Voltage | V _{DD} | | 2.7 | 5.5 | V | |
| Low-level Output Voltage | V _{OLSMB} | @ I _{PULLUP} | | 0.4 | V | |
| Current sinking at V _{OLSMB} = 0.4 V | I _{PULLUP} | SMB Data Pin | 4 | | mA | |
| SCLK/SDATA Clock/Data Rise Time | T _{R12C} | (Max VIL - 0.15) to (Min VIH + 0.15) | | 1000 | ns | |
| SCLK/SDATA Clock/Data Fall Time | T _{F12C} | (Min VIH + 0.15) to (Max VIL - 0.15) | | 300 | ns | |
| Maximum SMBus Operating Frequency | F _{SMBUS} | | | 100 | kHz | |
| Spread Spectrum Modulation Frequency | f _{SSMOD} | Triangular Modulation | 30 | 33 | kHz | |

Electrical Characteristics - Input/Supply/Common Output DC ParametersDC Parameters: (unless otherwise noted, guaranteed by design and characterization, not 100% tested in production).

¹Signal is required to be monotonic in this region.

²input leakage current does not include inputs with pull-up or pull-down resistors

³3.3V referenced inputs are: PCI_STOP#, CPU_STOP#, TME, SRC5_EN, ITP_EN, SCLKL, SDATA, TESTMODE, TESTSEL, CKPWRGD and CR# inputs if selected.

⁴Intentionally blank

⁵Maximum VIH is not to exceed VDD

⁶Human Body Model

⁷Operation under these conditions is neither implied, nor guaranteed.

⁸Frequency Select pins which have tri-level input

⁹PCI3/CFG0 is optional

¹⁰If present. Not all parts have this feature.

AC Electrical Characteristics - Low Power Differential Outputs

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | NOTES |
|----------------------------|-----------|--------------------------|------|------|-------|--------|
| Rising Edge Slew Rate | tSLR | Averaging on | 2.5 | 4 | V/ns | 2, 3 |
| Falling Edge Slew Rate | tFLR | Averaging on | 2.5 | 4 | V/ns | 2, 3 |
| Slew Rate Variation | tSLVAR | Averaging on | | 20 | % | 1, 10 |
| Differential Voltage Swing | VSWING | Averaging off | 300 | | mV | 2 |
| Crossing Point Voltage | VXABS | Averaging off | 300 | 550 | mV | 1,4,5 |
| Crossing Point Variation | VXABSVAR | Averaging off | | 140 | mV | 1,4,9 |
| Maximum Output Voltage | VHIGH | Averaging off | | 1150 | mV | 1,7 |
| Minimum Output Voltage | VLOW | Averaging off | -300 | | mV | 1,8 |
| Duty Cycle | DCYC | Averaging on | 45 | 55 | % | 2 |
| CPU Skew | CPUSKEW | Averaging on | | 100 | ps | |
| CPU[1:0] Skew | CPUSKEW10 | Differential Measurement | | 100 | ps | 1 |
| CPU[2_ITP:0] Skew | CPUSKEW20 | Differential Measurement | | 150 | ps | 1 |
| SRC[10:0] Skew | SRCSKEW | Differential Measurement | | 3000 | ps | 1,6,11 |

NOTES on DIF Output AC Specs: (unless otherwise noted, guaranteed by design and characterization, not 100% tested in production).

¹Measurement taken for single ended waveform on a component test board (not in system)

²Measurement taken from differential waveform on a component test board. (not in system)

³Slew rate emasured through V_swing voltage range centered about differential zero

⁴Vcross is defined at the voltage where Clock = Clock#, measured on a component test board (not in system)

⁵Only applies to the differential rising edge (Clock rising, Clock# falling)

⁶Total distributed intentional SRC to SRC skew. PCIe Gen2 outputs (SRC3, 4, 6 and 7) will have 0 nominal skew. Maximum allowable interpair skew is 150 ps.

⁷The max voltage including overshoot.

⁸The min voltage including undershoot.

⁹The total variation of all Vcross measurements in any particular system. Note this is a subset of V_cross min/mas (V_Cross absolute) allowed. The intent is to limit Vcross induced

¹⁰Matching applies to rising edge rate for Clock and falling edge rate for Clock#. It is measured using a +/-75mV window centered on the average cross point where Clock rising meets

¹¹For PCIe Gen2 compliant devices, SRC 3, 4, 6, and 7 will have 0 ps nominal skew.

Clock Jitter Specs - Low Power Differential Outputs

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | NOTES |
|-----------------------------|---------|--------------------------|-----|-----|-------|-------|
| CPU Jitter - Cycle to Cycle | CPUJC2C | Differential Measurement | | 85 | ps | 1 |
| SRC Jitter - Cycle to Cycle | SRCJC2C | Differential Measurement | | 125 | ps | 1,2 |
| DOT Jitter - Cycle to Cycle | DOTJC2C | Differential Measurement | | 250 | ps | 1 |

NOTES on DIF Output Jitter: (unless otherwise noted, guaranteed by design and characterization, not 100% tested in production).


¹Jitter specs are specified as measured on a clock characterization board. System designers need to take special care not to use these numbers, as the in-system performance will be somewhat degraded. The receiver EMTS (chispet or CPU) will have the rece

²Phase jitter requirement: The designated Ge2 outputs will meet the reference clock jitter requirements from the PCI Express Gen2 Base Spec. The test is performed on a component test board under quiet conditions with all outputs on. Jitter analysis is performed using a standardized tool provided by the PCI SIG or equivalent. Measurement methodology is as defined by the PCI SIG.

Electrical Characteristics - PCICLK/PCICLK_F

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | NOTES |
|------------------------------|----------------------|---------------------------------|----------|----------|-------|-------|
| Long Accuracy | ppm | see Tperiod min-max values | -100 | 100 | ppm | 1,2 |
| Clock period | T _{period} | 33.33MHz output no spread | 29.99700 | 30.00300 | ns | 2 |
| | | 33.33MHz output spread | 30.08421 | 30.23459 | ns | 2 |
| Absolute min/max period | T _{abs} | 33.33MHz output no spread | 29.49700 | 30.50300 | ns | 2 |
| | | 33.33MHz output nominal/spread | 29.56617 | 30.58421 | ns | 2 |
| Output High Voltage | V _{OH} | I _{OH} = -1 mA | 2.4 | | V | 1 |
| Output Low Voltage | V _{OL} | I _{OL} = 1 mA | | 0.55 | V | 1 |
| Output High Current | I _{OH} | V _{OH} @ MIN = 1.0 V | -33 | | mA | 1 |
| | | V _{OH} @ MAX = 3.135 V | | -33 | mA | 1 |
| Output Low Current | I _{OL} | V _{OL} @ MIN = 1.95 V | 30 | | mA | 1 |
| | | V _{OL} @ MAX = 0.4 V | | 38 | mA | 1 |
| Rising Edge Slew Rate | t _{SLR} | Measured from 0.8 to 2.0 V | 1 | 4 | V/ns | 1 |
| Falling Edge Slew Rate | t _{FLR} | Measured from 2.0 to 0.8 V | 1 | 4 | V/ns | 1 |
| Pin to Pin Skew | t _{skew} | V _T = 1.5 V | | 250 | ps | 2 |
| Intentional PCI to PCI delay | t _{skew} | V _T = 1.5 V | 100 | 200 | ps | 2 |
| Duty Cycle | d _{t1} | V _T = 1.5 V | 45 | 55 | % | 2 |
| Jitter, Cycle to cycle | t _{jcy-cyc} | V _T = 1.5 V | | 500 | ps | 2 |

Intentional PCI Clock to Clock Delay

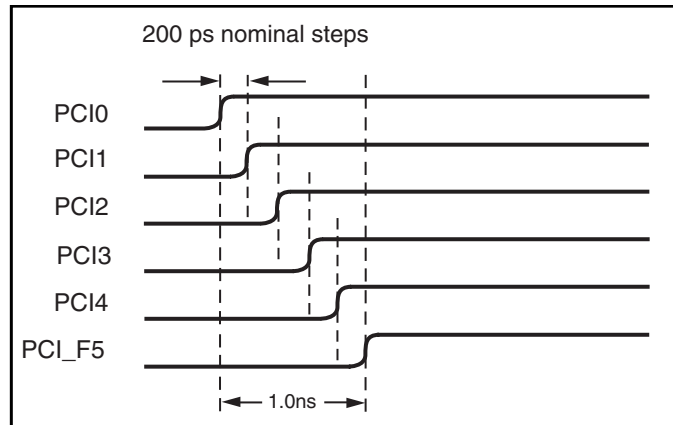

Electrical Characteristics - USB48MHz

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | NOTES |
|-------------------------|----------------------|---------------------------------|----------|----------|-------|-------|
| Long Accuracy | ppm | see Tperiod min-max values | -100 | 100 | ppm | 2,4 |
| Clock period | T _{period} | 48.00MHz output nominal | 20.83125 | 20.83542 | ns | 2,3 |
| Absolute min/max period | T _{abs} | 48.00MHz output nominal | 20.48125 | 21.18542 | ns | 2 |
| CLK High Time | T _{HIGH} | | 8.216563 | 11.15198 | V | |
| CLK Low time | T _{LOW} | | 7.816563 | 10.95198 | V | |
| Output High Voltage | V _{OH} | I _{OH} = -1 mA | 2.4 | | V | |
| Output Low Voltage | V _{OL} | I _{OL} = 1 mA | | 0.55 | V | |
| Output High Current | I _{OH} | V _{OH} @ MIN = 1.0 V | -29 | | mA | |
| | | V _{OH} @ MAX = 3.135 V | | -23 | mA | |
| Output Low Current | I _{OL} | V _{OL} @ MIN = 1.95 V | 29 | | mA | |
| | | V _{OL} @ MAX = 0.4 V | | 27 | mA | |
| Rising Edge Slew Rate | t _{SLR} | Measured from 0.8 to 2.0 V | 1 | 2 | V/ns | 1 |
| Falling Edge Slew Rate | t _{FLR} | Measured from 2.0 to 0.8 V | 1 | 2 | V/ns | 1 |
| Duty Cycle | d _{t1} | V _T = 1.5 V | 45 | 55 | % | 2 |
| Jitter, Cycle to cycle | t _{jcy-cyc} | V _T = 1.5 V | | 350 | ps | 2 |

Electrical Characteristics - REF-14.318MHz

| PARAMETER | SYMBOL | CONDITIONS | MIN | MAX | UNITS | Notes |
|-------------------------|----------|--|----------|----------|-------|-------|
| Long Accuracy | ppm | see Tperiod min-max values | -100 | 100 | ppm | 2, 4 |
| Clock period | Tperiod | 14.318MHz output nominal | 69.82033 | 69.86224 | ns | 2, 3 |
| Absolute min/max period | Tab | 14.318MHz output nominal | 69.83400 | 70.84800 | ns | 2 |
| CLK High Time | THIGH | | 29.97543 | 38.46654 | V | |
| CLK Low time | TLOW | | 29.57543 | 38.26654 | V | |
| Output High Voltage | VOH | IOH = -1 mA | 2.4 | | V | |
| Output Low Voltage | VOL | IOL = 1 mA | | 0.4 | V | |
| Output High Current | IOH | VOH @MIN = 1.0 V, VOH@MAX = 3.135 V | -33 | -33 | mA | |
| Output Low Current | IOL | VOL @MIN = 1.95 V, VOL @MAX = 0.4 V | 30 | 38 | mA | |
| Rising Edge Slew Rate | tSLR | Measured from 0.8 to 2.0 V | 1 | 4 | V/ns | 1 |
| Falling Edge Slew Rate | tFLR | Measured from 2.0 to 0.8 V | 1 | 4 | V/ns | 1 |
| Duty Cycle | dt1 | VT = 1.5 V | 45 | 55 | % | 2 |
| Jitter, Cycle to cycle | tjcy-cyc | VT = 1.5 V | | 1000 | ps | 2 |

NOTES on SE outputs: (unless otherwise noted, guaranteed by design and characterization, not 100% tested in production).

¹Edge rate in system is measured from 0.8V to 2.0V.

²Duty cycle, Period and Jitter are measured with respect to 1.5V

³The average period over any 1us period of time

⁴Using frequency counter with the measurement interval equal or greater that 0.15s, target frequencies are 14.318180 MHz, 33.333333MHz and 48.000000MHz

Table 1: CPU Frequency Select Table

| FS _L C ² B0b7 | FS _L B ¹ B0b6 | FS _L A ¹ B0b5 | CPU MHz | SRC MHz | PCI MHz | REF MHz | USB MHz | DOT MHz |
|--|--|--|------------|------------|------------|------------|------------|------------|
| 0 | 0 | 0 | 266.66 | 100.00 | 33.33 | 14.318 | 48.00 | 96.00 |
| 0 | 0 | 1 | 133.33 | | | | | |
| 0 | 1 | 0 | 200.00 | | | | | |
| 0 | 1 | 1 | 166.66 | | | | | |
| 1 | 0 | 0 | 333.33 | | | | | |
| 1 | 0 | 1 | 100.00 | | | | | |
| 1 | 1 | 0 | 400.00 | | | | | |
| 1 | 1 | 1 | Reserved | | | | | |

1. FS_LA and FS_LB are low-threshold inputs. Please see V_{IL_FS} and V_{IH_FS} specifications in the Input/Supply/Common Output Parameters Table for correct values. Also refer to the Test Clarification Table.
2. FS_LC is a three-level input. Please see the V_{IL_FS} and V_{IH_FS} specifications in the Input/Supply/Common Output Parameters Table for correct values.

Table 2: PLL3 Quick Configuration

| B1b4 | B1b3 | B1b2 | B1b1 | Pin 17 | Pin 18 | Spread | Comment |
|------|------|------|------|----------------|--------|------------------|------------------------------------|
| | | | | MHz | MHz | % | |
| 0 | 0 | 0 | 0 | PLL 3 disabled | | | |
| 0 | 0 | 0 | 1 | 100.00 | 100.00 | 0.5% Down Spread | SRCCLK1 from SRC_MAIN |
| 0 | 0 | 1 | 0 | 100.00 | 100.00 | 0.5% Down Spread | Only SRCCLK1 from PLL3 |
| 0 | 0 | 1 | 1 | 100.00 | 100.00 | 1% Down Spread | Only SRCCLK1 from PLL3 |
| 0 | 1 | 0 | 0 | 100.00 | 100.00 | 1.5% Down Spread | Only SRCCLK1 from PLL3 |
| 0 | 1 | 0 | 1 | 100.00 | 100.00 | 2% Down Spread | Only SRCCLK1 from PLL3 |
| 0 | 1 | 1 | 0 | 100.00 | 100.00 | 2.5% Down Spread | Only SRCCLK1 from PLL3 |
| 0 | 1 | 1 | 1 | N/A | N/A | N/A | N/A |
| 1 | 0 | 0 | 0 | 24.576 | 24.576 | None | 24.576Mhz on SE1 and SE2 |
| 1 | 0 | 0 | 1 | 24.576 | 98.304 | None | 24.576Mhz on SE1, 98.304Mhz on SE2 |
| 1 | 0 | 1 | 0 | 98.304 | 98.304 | None | 98.304Mhz on SE1 and SE2 |
| 1 | 0 | 1 | 1 | 27.000 | 27.000 | None | 27Mhz on SE1 and SE2 |
| 1 | 1 | 0 | 0 | 25.000 | 25.000 | None | 25Mhz on SE1 and SE2 |
| 1 | 1 | 0 | 1 | N/A | N/A | N/A | N/A |
| 1 | 1 | 1 | 0 | N/A | N/A | N/A | N/A |
| 1 | 1 | 1 | 1 | N/A | N/A | N/A | N/A |

Table 3: IO_Vout select table

| B9b2 | B9b1 | B9b0 | IO_Vout |
|------|------|------|---------|
| 0 | 0 | 0 | 0.3V |
| 0 | 0 | 1 | 0.4V |
| 0 | 1 | 0 | 0.5V |
| 0 | 1 | 1 | 0.6V |
| 1 | 0 | 0 | 0.7V |
| 1 | 0 | 1 | 0.8V |
| 1 | 1 | 0 | 0.9V |
| 1 | 1 | 1 | 1.0V |

Table 4: Device ID table

| B8b7 | B8b6 | B8b5 | B8b4 | Comment |
|------|------|------|------|------------------|
| 0 | 0 | 0 | 0 | 56 pin TSSOP/QFN |
| 0 | 0 | 0 | 1 | 64 pin TSSOP/QFN |
| 0 | 0 | 1 | 0 | Reserved |
| 0 | 0 | 1 | 1 | Reserved |
| 0 | 1 | 0 | 0 | Reserved |
| 0 | 1 | 0 | 1 | Reserved |
| 0 | 1 | 1 | 0 | Reserved |
| 0 | 1 | 1 | 1 | Reserved |
| 1 | 0 | 0 | 0 | Reserved |
| 1 | 0 | 0 | 1 | Reserved |
| 1 | 0 | 1 | 0 | Reserved |
| 1 | 0 | 1 | 1 | Reserved |
| 1 | 1 | 0 | 0 | Reserved |
| 1 | 1 | 0 | 1 | Reserved |
| 1 | 1 | 1 | 0 | Reserved |
| 1 | 1 | 1 | 1 | Reserved |

PCI_STOP# Power Management

| SMBus OE Bit | PCI_STOP# | Stop Drive Mode | Single-ended Clocks | | Differential Clocks (Except CPU) | |
|--------------|-----------|-----------------|---------------------|--------------|----------------------------------|--------------|
| | | | Stoppable | Free running | Stoppable | Free running |
| Enable | 1 | X | Running | Running | Running | Running |
| | 0 | 0 | Low | Low | CK= High CK# = Low | Running |
| | | 1 | | | CK= Pull down CK# = Low | Running |
| Disable | X | X | Low | | CK= Pull down, CK# = Low | |

CPU_STOP# Power Management

| SMBus OE Bit | PCI_STOP# | Stop Drive Mode | Differential Clocks | |
|--------------|-----------|-----------------|----------------------------|--------------|
| | | | Stoppable | Free running |
| Enable | 1 | X | Running | Running |
| | 0 | 0 | CK= High CK# = Low | Running |
| | | 1 | CK= Pull down CK# = Low | Running |
| Disable | X | X | Low | |

CR# Power Management

| SMBus OE Bit | CR# | Stop Drive Mode | Differential Clocks | |
|--------------|-----|-----------------|---------------------------|--------------|
| | | | Stoppable | Free running |
| Enable | 1 | X | Running | Running |
| | 0 | | CK= Pull down, CK# = Low | |
| Disable | X | | CK = Pull down, CK# = Low | |

PD# Power Management

| Device State | Single-ended Clocks | | Differential Clocks (Except CPU1) | CPU1 |
|-------------------------------------|---------------------|-----------------|-----------------------------------|----------------------------|
| | w/o Latched input | w/Latched input | | |
| Latches Open | Low | Hi-Z | CK= Pull down, CK# = Low | CK= Pull down, CK# = Low |
| Power Down | | | CK= Pull down CK# = Low | CK= Pull down CK# = Low |
| M1 | | | CK= Pull down CK# = Low | Running |
| Virtual Power Cycle to Latches Open | | | CK= Pull down, CK# = Low | CK= Pull down, CK# = Low |

General SMBus serial interface information for the ICS9LPR502

How to Write:

- Controller (host) sends a start bit.
- Controller (host) sends the write address $D2_{(H)}$
- ICS clock will **acknowledge**
- Controller (host) sends the beginning byte location = N
- ICS clock will **acknowledge**
- Controller (host) sends the data byte count = X
- ICS clock will **acknowledge**
- Controller (host) starts sending **Byte N through Byte N + X - 1**
- ICS clock will **acknowledge** each byte **one at a time**
- Controller (host) sends a Stop bit

How to Read:

- Controller (host) will send start bit.
- Controller (host) sends the write address $D2_{(H)}$
- ICS clock will **acknowledge**
- Controller (host) sends the beginning byte location = N
- ICS clock will **acknowledge**
- Controller (host) will send a separate start bit.
- Controller (host) sends the read address $D3_{(H)}$
- ICS clock will **acknowledge**
- ICS clock will send the data byte count = X
- ICS clock sends **Byte N + X - 1**
- ICS clock sends **Byte 0 through byte X (if $X_{(H)}$ was written to byte 8).**
- Controller (host) will need to acknowledge each byte
- Controller (host) will send a not acknowledge bit
- Controller (host) will send a stop bit

| Index Block Write Operation | | |
|-----------------------------|-----------|----------------------|
| Controller (Host) | | ICS (Slave/Receiver) |
| T | starT bit | |
| Slave Address $D2_{(H)}$ | | |
| WR | WRite | |
| | | ACK |
| Beginning Byte = N | | |
| | | ACK |
| Data Byte Count = X | | |
| | | ACK |
| Beginning Byte N | X Byte | |
| ○ | | ACK |
| ○ | | ○ |
| ○ | | ○ |
| Byte N + X - 1 | | ○ |
| | | ACK |
| P | stoP bit | |

| Index Block Read Operation | | |
|----------------------------|-----------------|----------------------|
| Controller (Host) | | ICS (Slave/Receiver) |
| T | starT bit | |
| Slave Address $D2_{(H)}$ | | |
| WR | WRite | |
| | | ACK |
| Beginning Byte = N | | |
| | | ACK |
| RT | Repeat starT | |
| Slave Address $D3_{(H)}$ | | |
| RD | ReaD | |
| | | ACK |
| | | Data Byte Count = X |
| ACK | | |
| ACK | | Beginning Byte N |
| ○ | | ○ |
| ○ | | ○ |
| ○ | | ○ |
| | | Byte N + X - 1 |
| N | Not acknowledge | |
| P | stoP bit | |

Byte 0 FS Readback and PLL Selection Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|--------------|--|------|--|---------------------|---------|
| 7 | - | FSLC | CPU Freq. Sel. Bit (Most Significant) | R | See Table 1 : CPU Frequency Select Table | | Latch |
| 6 | - | FSLB | CPU Freq. Sel. Bit | R | | | Latch |
| 5 | - | FSLA | CPU Freq. Sel. Bit (Least Significant) | R | | | Latch |
| 4 | - | iAMT_EN | Set via SMBus or dynamically by CK505 if detects dynamic M1 | RW | Legacy Mode | iAMT Enabled | 0 |
| 3 | | Reserved | Reserved | RW | | | 0 |
| 2 | - | SRC_Main_SEL | Select source for SRC Main | RW | SRC Main = PLL1 | SRC Main = PLL3 | 0 |
| 1 | - | SATA_SEL | Select source for SATA clock | RW | SATA = SRC_Main | SATA = PLL2 | 0 |
| 0 | - | PD_Restore | 1 = on Power Down de-assert return to last known state 0 = clear all SMBus configurations as if cold power-on and go to latches open state This bit is ignored and treated at '1' if device is in iAMT mode. | RW | Configuration Not Saved | Configuration Saved | 1 |

Byte 1 DOT96 Select and PLL3 Quick Config Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-------|--------------|--------------------------------|------|---|-------------------|---------|
| 7 | 13/14 | SRC0_SEL | Select SRC0 or DOT96 | RW | SRC0 | DOT96 | 0 |
| 6 | - | PLL1_SSC_SEL | Select 0.5% down or center SSC | RW | Down spread | Center spread | 0 |
| 5 | | PLL3_SSC_SEL | Select 0.5% down or center SSC | RW | Down spread | Center spread | 0 |
| 4 | | PLL3_CF3 | PLL3 Quick Config Bit 3 | RW | See Table 2: PLL3 Quick Configuration Only applies if Byte 0, bit 2 = 0. | | 0 |
| 3 | | PLL3_CF2 | PLL3 Quick Config Bit 2 | RW | | | 0 |
| 2 | | PLL3_CF1 | PLL3 Quick Config Bit 1 | RW | | | 0 |
| 1 | | PLL3_CF0 | PLL3 Quick Config Bit 0 | RW | | | 1 |
| 0 | | PCI_SEL | PCI_SEL | RW | PCI from PLL1 | PCI from SRC_MAIN | 1 |

Byte 2 Output Enable Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|----------|---|------|-----------------|----------------|---------|
| 7 | | REF_OE | Output enable for REF, if disabled output is tri-stated | RW | Output Disabled | Output Enabled | 1 |
| 6 | | USB_OE | Output enable for USB | RW | Output Disabled | Output Enabled | 1 |
| 5 | | PCIF5_OE | Output enable for PCI5 | RW | Output Disabled | Output Enabled | 1 |
| 4 | | PCI4_OE | Output enable for PCI4 | RW | Output Disabled | Output Enabled | 1 |
| 3 | | PCI3_OE | Output enable for PCI3 | RW | Output Disabled | Output Enabled | 1 |
| 2 | | PCI2_OE | Output enable for PCI2 | RW | Output Disabled | Output Enabled | 1 |
| 1 | | PCI1_OE | Output enable for PCI1 | RW | Output Disabled | Output Enabled | 1 |
| 0 | | PCI0_OE | Output enable for PCI0 | RW | Output Disabled | Output Enabled | 1 |

Byte 3 Output Enable Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|-------------|-------------------------------|------|-----------------|----------------|---------|
| 7 | | SRC11_OE | Output enable for SRC11 | RW | Output Disabled | Output Enabled | 1 |
| 6 | | SRC10_OE | Output enable for SRC10 | RW | Output Disabled | Output Enabled | 1 |
| 5 | | SRC9_OE | Output enable for SRC9 | RW | Output Disabled | Output Enabled | 1 |
| 4 | | SRC8/ITP_OE | Output enable for SRC8 or ITP | RW | Output Disabled | Output Enabled | 1 |
| 3 | | SRC7_OE | Output enable for SRC7 | RW | Output Disabled | Output Enabled | 1 |
| 2 | | SRC6_OE | Output enable for SRC6 | RW | Output Disabled | Output Enabled | 1 |
| 1 | | SRC5_OE | Output enable for SRC5 | RW | Output Disabled | Output Enabled | 1 |
| 0 | | SRC4_OE | Output enable for SRC4 | RW | Output Disabled | Output Enabled | 1 |

Byte 4 Output Enable and Spread Spectrum Disable Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|---------------|---------------------------------|------|-----------------|----------------|---------|
| 7 | | SRC3_OE | Output enable for SRC3 | RW | Output Disabled | Output Enabled | 1 |
| 6 | | SATA/SRC2_OE | Output enable for SATA/SRC2 | RW | Output Disabled | Output Enabled | 1 |
| 5 | | SRC1_OE | Output enable for SRC1 | RW | Output Disabled | Output Enabled | 1 |
| 4 | | SRC0/DOT96_OE | Output enable for SRC0/DOT96 | RW | Output Disabled | Output Enabled | 1 |
| 3 | | CPU1_OE | Output enable for CPU1 | RW | Output Disabled | Output Enabled | 1 |
| 2 | | CPU0_OE | Output enable for CPU0 | RW | Output Disabled | Output Enabled | 1 |
| 1 | | PLL1_SSC_ON | Enable PLL1's spread modulation | RW | Spread Disabled | Spread Enabled | 1 |
| 0 | | PLL3_SSC_ON | Enable PLL3's spread modulation | RW | Spread Disabled | Spread Enabled | 1 |

Byte 5 Clock Request Enable/Configuration Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|-----------|--|------|---------------|---------------|---------|
| 7 | | CR#_A_EN | Enable CR#_A (clk req), PCI0_OE must be = 1 for this bit to take effect | RW | Disable CR#_A | Enable CR#_A | 0 |
| 6 | | CR#_A_SEL | Sets CR#_A to control either SRC0 or SRC2 | RW | CR#_A -> SRC0 | CR#_A -> SRC2 | 0 |
| 5 | | CR#_B_EN | Enable CR#_B (clk req) | RW | Disable CR#_B | Enable CR#_B | 0 |
| 4 | | CR#_B_SEL | Sets CR#_B -> SRC1 or SRC4 | RW | CR#_B -> SRC1 | CR#_B -> SRC4 | 0 |
| 3 | | CR#_C_EN | Enable CR#_C (clk req) | RW | Disable CR#_C | Enable CR#_C | 0 |
| 2 | | CR#_C_SEL | Sets CR#_C -> SRC0 or SRC2 | RW | CR#_C -> SRC0 | CR#_C -> SRC2 | 0 |
| 1 | | CR#_D_EN | Enable CR#_D (clk req) | RW | Disable CR#_D | Enable CR#_D | 0 |
| 0 | | CR#_D_SEL | Sets CR#_D -> SRC1 or SRC4 | RW | CR#_D -> SRC1 | CR#_D -> SRC4 | 0 |

Byte 6 Clock Request Enable/Configuration and Stop Control Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|-------------------------|--|------|---------------|-----------------------------------|---------|
| 7 | | CR#_E_EN | Enable CR#_E (clk req) -> SRC6 | RW | Disable CR#_E | Enable CR#_E | 0 |
| 6 | | CR#_F_EN | Enable CR#_F (clk req) -> SRC8 | RW | Disable CR#_F | Enable CR#_F | 0 |
| 5 | | CR#_G_EN | Enable CR#_G (clk req) -> SRC9 | RW | Disable CR#_G | Enable CR#_G | 0 |
| 4 | | CR#_H_EN | Enable CR#_H (clk req) -> SRC10 | RW | Disable CR#_H | Enable CR#_H | 0 |
| 3 | | Reserved | Reserved | RW | | | 0 |
| 2 | | Reserved | Reserved | RW | | | 0 |
| 1 | | SSCD_STP_CRTL (SRC1) | If set, SSCD (SRC1) stops with PCI_STOP# | RW | Free Running | Stops with PCI_STOP# assertion | 0 |
| 0 | | SRC_STP_CRTL | If set, SRCs (except SRC1) stop with PCI_STOP# | RW | Free Running | Stops with PCI_STOP# assertion | 0 |

Byte 7 Vendor ID/ Revision ID

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|-----------------|----------------------------------|------|-----------------|---|---------|
| 7 | | Rev Code Bit 3 | Revision ID | R | Vendor specific | | X |
| 6 | | Rev Code Bit 2 | | R | | | X |
| 5 | | Rev Code Bit 1 | | R | | | X |
| 4 | | Rev Code Bit 0 | | R | | | X |
| 3 | | Vendor ID bit 3 | Vendor ID ICS is 0001, binary | R | | | 0 |
| 2 | | Vendor ID bit 2 | | R | | | 0 |
| 1 | | Vendor ID bit 1 | | R | | | 0 |
| 0 | | Vendor ID bit 0 | | R | 1 | | |

Byte 8 Device ID and Output Enable Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|------------|---|------|---------------------|---------|---------|
| 7 | | Device_ID3 | Table of Device identifier codes, used for differentiating between CK505 package options, etc. | R | See Device ID Table | | 0 |
| 6 | | Device_ID2 | | R | | | 0 |
| 5 | | Device_ID1 | | R | | | 0 |
| 4 | | Device_ID0 | | R | | | 0 |
| 3 | | Reserved | Reserved | RW | - | - | 0 |
| 2 | | Reserved | Reserved | RW | - | - | 0 |
| 1 | | SE1_OE | Output enable for SE1 | RW | Disabled | Enabled | 0 |
| 0 | | SE2_OE | Output enable for SE2 | RW | Disabled | Enabled | 0 |

Byte 9 Output Control Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|------------------|---|------|--|-----------------------------------|---------|
| 7 | | PCIF5_STOP_EN | Allows control of PCIF5 with assertion of PCI_STOP# | RW | Free running | Stops with PCI_STOP# assertion | 0 |
| 6 | | TME_Readback | Trusted Mode Enable (TME) strap status | R | normal operation | no overclocking | 0 |
| 5 | | Reserved | Reserved | RW | - | - | 1 |
| 4 | | Test Mode Select | Allows test select, ignores REF/FSC/TestSel | RW | Outputs HI-Z | Outputs = REF/N | 0 |
| 3 | | Test Mode Entry | Allows entry into test mode, ignores FSB/TestMode | RW | Normal operation | Test mode | 0 |
| 2 | | IO_VOUT2 | IO Output Voltage Select (Most Significant Bit) | RW | See Table 3: V_IO Selection (Default is 0.8V) | | 1 |
| 1 | | IO_VOUT1 | IO Output Voltage Select | RW | | | 0 |
| 0 | | IO_VOUT0 | IO Output Voltage Select (Least Significant Bit) | RW | | | 1 |

Byte 10 CK505 Rev 0.85 functions (ICS Rev H silicon and higher)

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|-------------------|---|------|----------------------|--------------|---------|
| 7 | | SRC5_EN Readback | Readback of SRC5 enable latch | R | CPU/PCI Stop Enabled | SRC5 Enabled | Latch |
| 6 | | Reserved | Reserved | RW | TBD | TBD | 0 |
| 5 | | Reserved | | RW | TBD | TBD | 0 |
| 4 | | Reserved | | RW | TBD | TBD | 0 |
| 3 | | Reserved | | RW | TBD | TBD | 0 |
| 2 | | Reserved | | RW | TBD | TBD | 0 |
| 1 | | CPU 1 Stop Enable | Enables control of CPU1 with CPU_STOP# | RW | Free Running | Stoppable | 1 |
| 0 | | CPU 0 Stop Enable | Enables control of CPU 0 with CPU_STOP# | RW | Free Running | Stoppable | 1 |

Byte 11 CK505 Rev 1.0 functions (ICS Rev P silicon and higher)

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|------------------|---|------|--------------|----------------------|---------|
| 7 | | Reserved | Reserved | RW | TBD | TBD | 0 |
| 6 | | Reserved | | RW | TBD | TBD | 0 |
| 5 | | Reserved | | RW | TBD | TBD | 0 |
| 4 | | Reserved | | RW | TBD | TBD | 0 |
| 3 | | CPU2 iAMT_EN | Enables CPU2(ITP) output in iAMT state (M1) | RW | Off in iAMT | Free running in iAMT | 0 |
| 2 | | CPU1 iAMT_EN | Enables CPU1 output in iAMT state (M1) | RW | Off in iAMT | Free running in iAMT | 1 |
| 1 | | PCIe-Gen2 | PCIe-Gen2 status | R | non-Gen2 | PCIe Gen2 compliant | 0 |
| 0 | | CPU2 Stop Enable | Enables control of CPU2(ITP) with CPU_STOP# | RW | Free Running | Stoppable | 1 |

Byte 12 Byte Count Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default | |
|-----|-----|----------|--|------|---|---|---------|---|
| 7 | | Reserved | Read Back byte count register, max bytes = 32 | RW | | | 0 | |
| 6 | | Reserved | | RW | | | | 0 |
| 5 | | BC5 | | RW | | | | 0 |
| 4 | | BC4 | | RW | | | | 0 |
| 3 | | BC3 | | RW | | | | 1 |
| 2 | | BC2 | | RW | | | | 1 |
| 1 | | BC1 | | RW | | | | 0 |
| 0 | | BC0 | | RW | | | | 1 |

Byte 13 CK505 PLL1 M/N Programming Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|--------|---|------|---|---|---------|
| 7 | | N Div8 | N Divider 8 | RW | - | - | X |
| 6 | | N Div9 | N Divider 9 | RW | - | - | X |
| 5 | | M Div5 | The decimal representation of M and N Divider in Byte 13 and 14 will configure the VCO frequency. Default at power up = latch-in or Byte 0 Rom table. | RW | - | - | X |
| 4 | | M Div4 | | RW | - | - | X |
| 3 | | M Div3 | | RW | - | - | X |
| 2 | | M Div2 | | RW | - | - | X |
| 1 | | M Div1 | | RW | - | - | X |
| | | | | RW | - | - | X |
| 0 | | M Div0 | | RW | - | - | X |

Byte 14 CK505 PLL1 M/N Programming Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|--------|---|------|---|---|---------|
| 7 | | N Div7 | The decimal representation of M and N Divider in Byte 13 and 14 will configure the VCO frequency. Default at power up = latch-in or Byte 0 Rom table. | RW | - | - | X |
| 6 | | N Div6 | | RW | - | - | X |
| 5 | | N Div5 | | RW | - | - | X |
| 4 | | N Div4 | | RW | - | - | X |
| 3 | | N Div3 | | RW | - | - | X |
| 2 | | N Div2 | | RW | - | - | X |
| 1 | | N Div1 | | RW | - | - | X |
| 0 | | N Div0 | | RW | - | - | X |

Byte 15 CK505 PLL1 Spread Spectrum Control Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|------|--|------|---|---|---------|
| 7 | | SSP7 | These Spread Spectrum bits will program the spread percentage. Contact ICS for the correct values. | RW | - | - | X |
| 6 | | SSP6 | | RW | - | - | X |
| 5 | | SSP5 | | RW | - | - | X |
| 4 | | SSP4 | | RW | - | - | X |
| 3 | | SSP3 | | RW | - | - | X |
| 2 | | SSP2 | | RW | - | - | X |
| 1 | | SSP1 | | RW | - | - | X |
| 0 | | SSP0 | | RW | - | - | X |

Byte 16 CK505 PLL1 Spread Spectrum Control Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|----------|--|------|---|---|---------|
| 7 | | Reserved | Reserved | RW | - | - | 0 |
| 6 | | SSP14 | These Spread Spectrum bits will program the spread percentage. Contact ICS for the correct values. | RW | - | - | x |
| 5 | | SSP13 | | RW | - | - | X |
| 4 | | SSP12 | | RW | - | - | X |
| 3 | | SSP11 | | RW | - | - | X |
| 2 | | SSP10 | | RW | - | - | X |
| 1 | | SSP9 | | RW | - | - | X |
| 0 | | SSP8 | | RW | - | - | X |

Byte 17 CK505 PLL3 M/N Programming Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|--------|---|------|---|---|---------|
| 7 | | N Div8 | N Divider 8 | RW | - | - | X |
| 6 | | N Div9 | N Divider 9 | RW | - | - | X |
| 5 | | M Div5 | The decimal representation of M and N Divider in Byte 17 and 18 will configure the VCO frequency. Default at power up = latch-in or Byte 0 Rom table. | RW | - | - | X |
| 4 | | M Div4 | | RW | - | - | X |
| 3 | | M Div3 | | RW | - | - | X |
| 2 | | M Div2 | | RW | - | - | X |
| 1 | | M Div1 | | RW | - | - | X |
| 0 | | M Div0 | | RW | - | - | X |

Byte 18 CK505 PLL3 M/N Programming Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|--------|---|------|---|---|---------|
| 7 | | N Div7 | The decimal representation of M and N Divider in Byte 17 and 18 will configure the VCO frequency. Default at power up = latch-in or Byte 0 Rom table. | RW | - | - | X |
| 6 | | N Div6 | | RW | - | - | X |
| 5 | | N Div5 | | RW | - | - | X |
| 4 | | N Div4 | | RW | - | - | X |
| 3 | | N Div3 | | RW | - | - | X |
| 2 | | N Div2 | | RW | - | - | X |
| 1 | | N Div1 | | RW | - | - | X |
| 0 | | N Div0 | | RW | - | - | X |

Byte 19 CK505 PLL3 Spread Spectrum Control Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|------|--|------|---|---|---------|
| 7 | | SSP7 | These Spread Spectrum bits will program the spread percentage. Contact ICS for the correct values. | RW | - | - | X |
| 6 | | SSP6 | | RW | - | - | X |
| 5 | | SSP5 | | RW | - | - | X |
| 4 | | SSP4 | | RW | - | - | X |
| 3 | | SSP3 | | RW | - | - | X |
| 2 | | SSP2 | | RW | - | - | X |
| 1 | | SSP1 | | RW | - | - | X |
| 0 | | SSP0 | | RW | - | - | X |

Byte 20 CK505 PLL3 Spread Spectrum Control Register

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|----------|--|------|---|---|---------|
| 7 | | Reserved | Reserved | RW | - | - | 0 |
| 6 | | SSP14 | These Spread Spectrum bits will program the spread percentage. Contact ICS for the correct values. | RW | - | - | X |
| 5 | | SSP13 | | RW | - | - | X |
| 4 | | SSP12 | | RW | - | - | X |
| 3 | | SSP11 | | RW | - | - | X |
| 2 | | SSP10 | | RW | - | - | X |
| 1 | | SSP9 | | RW | - | - | X |
| 0 | | SSP8 | | RW | - | - | X |

Byte 21 M/N Enables

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|----------------|-------------|------|---------|--------|---------|
| 7 | | Reserved | | RW | | | 0 |
| 6 | | Reserved | | RW | | | 0 |
| 5 | | Reserved | | RW | | | 0 |
| 4 | | Reserved | | RW | | | 0 |
| 3 | | Reserved | | RW | | | 0 |
| 2 | | Reserved | | RW | | | 0 |
| 1 | | M/N Enable CPU | | RW | Disable | Enable | 0 |
| 0 | | M/N Enable | | RW | Disable | Enable | 0 |

Byte 22 CPU M/N Programming

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|-------------|-----------------------|------|---|---|---------|
| 7 | | N Div bit 8 | PLL 1 M/N Programming | RW | - | - | X |
| 6 | | N Div bit 9 | (Intel PLL1 CPU) | RW | - | - | X |
| 5 | | M Div Bit 5 | | RW | - | - | X |
| 4 | | M Div Bit 4 | | RW | - | - | X |
| 3 | | M Div Bit 3 | | RW | - | - | X |
| 2 | | M Div Bit 2 | | RW | - | - | X |
| 1 | | M Div Bit 1 | | RW | - | - | X |
| 0 | | M Div Bit 0 | | RW | - | - | X |

Byte 23 CPU M/N Programming

| Bit | Pin | Name | Description | Type | 0 | 1 | Default |
|-----|-----|-------------|-----------------------|------|---|---|---------|
| 7 | | N Div bit 7 | PLL 1 M/N Programming | RW | - | - | X |
| 6 | | N Div bit 6 | (Intel PLL1 CPU) | RW | - | - | X |
| 5 | | N Div bit 5 | | RW | - | - | X |
| 4 | | N Div bit 4 | | RW | - | - | X |
| 3 | | N Div bit 3 | | RW | - | - | X |
| 2 | | N Div bit 2 | | RW | - | - | X |
| 1 | | N Div bit 1 | | RW | - | - | X |
| 0 | | N Div Bit 0 | | RW | - | - | X |

Bytes 24-62 Reserved

Byte 63 Special Power Management Features (Rev P Silicon and Higher)

| Bit | Pin | Name | Description | RW | 0 | 1 | Default |
|-----|-----|-----------------|-----------------------------------|----|-----|----|---------|
| 7 | | Reserved | | RW | | | 0 |
| 6 | | Reserved | | RW | | | 0 |
| 5 | | Reserved | | RW | | | 0 |
| 4 | | Reserved | | RW | | | 0 |
| 3 | | Reserved | | RW | | | 0 |
| 2 | | Reserved | | RW | | | 0 |
| 1 | | SATA PLL | Power Management Feature | RW | off | on | Note |
| 0 | | XTAL PD Control | Controls XTAL on/off in legacy PD | RW | off | on | 1 |

Note: Default is "off" for Rev P Silicon and higher.


*Accessing any SMBus bytes not shown in the datasheet could result in incorrect clock functions.

Test Clarification Table

| Comments | HW | | SW | | OUTPUT |
|---|-----------------------------|----------------------------------|---------------------------|--------------------------|--------|
| | FSLC/ TEST_SEL HW PIN | FSLB/ TEST_MOD E HW PIN | TEST ENTRY BIT B9b3 | REF/N or HI-Z B9b4 | |
| | <2.0V | X | 0 | 0 | NORMAL |
| Power-up w/ TEST_SEL = 1 to enter test mode Cycle power to disable test mode FSLC./TEST_SEL -->3-level latched input If power-up w/ V>2.0V then use TEST_SEL If power-up w/ V<2.0V then use FSLC FSLB/TEST_MODE -->low Vth input TEST_MODE is a real time input | >2.0V | 0 | X | 0 | HI-Z |
| | >2.0V | 0 | X | 1 | REF/N |
| | >2.0V | 1 | X | 0 | REF/N |
| | >2.0V | 1 | X | 1 | REF/N |
| If TEST_SEL HW pin is 0 during power-up, test mode can be invoked through B9b3. If test mode is invoked by B9b3, only B9b4 is used to select HI-Z or REF/N FSLB/TEST_Mode pin is not used. Cycle power to disable test mode, one shot control | <2.0V | X | 1 | 0 | HI-Z |
| | <2.0V | X | 1 | 1 | REF/N |

B9b3: 1= ENTER TEST MODE, Default = 0 (NORMAL OPERATION)

B9b4: 1= REF/N, Default = 0 (HI-Z)

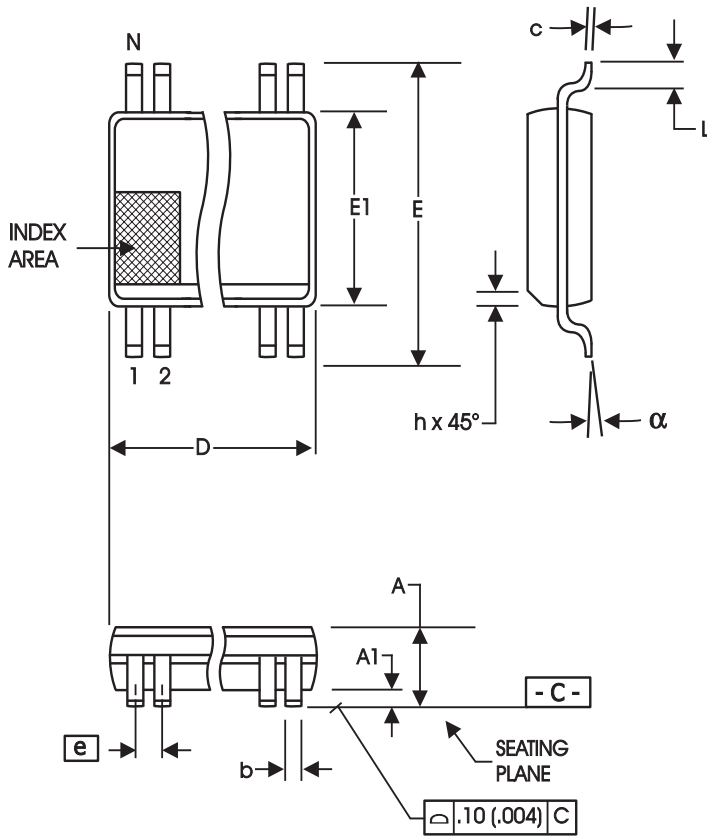

56-Lead, 300 mil Body, 25 mil, SSOP

| SYMBOL | In Millimeters COMMON DIMENSIONS | | In Inches COMMON DIMENSIONS | |
|--------|-------------------------------------|-------|--------------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 2.41 | 2.80 | .095 | .110 |
| A1 | 0.20 | 0.40 | .008 | .016 |
| b | 0.20 | 0.34 | .008 | .0135 |
| c | 0.13 | 0.25 | .005 | .010 |
| D | SEE VARIATIONS | | SEE VARIATIONS | |
| E | 10.03 | 10.68 | .395 | .420 |
| E1 | 7.40 | 7.60 | .291 | .299 |
| e | 0.635 BASIC | | 0.025 BASIC | |
| h | 0.38 | 0.64 | .015 | .025 |
| L | 0.50 | 1.02 | .020 | .040 |
| N | SEE VARIATIONS | | SEE VARIATIONS | |
| α | 0° | 8° | 0° | 8° |

VARIATIONS

| N | D mm. | | D (inch) | |
|----|-------|-------|----------|------|
| | MIN | MAX | MIN | MAX |
| 56 | 18.31 | 18.55 | .720 | .730 |

Reference Doc.: JEDEC Publication 95, MO-118

10-0034

Ordering Information

9LPR502yFLFT

Example:

XXXX y F LFT


Designation for tape and reel packaging

Lead Free, RoHS Compliant (Optional)

Package Type
F = SSOP

Revision Designator (will not correlate with datasheet revision)

Device Type

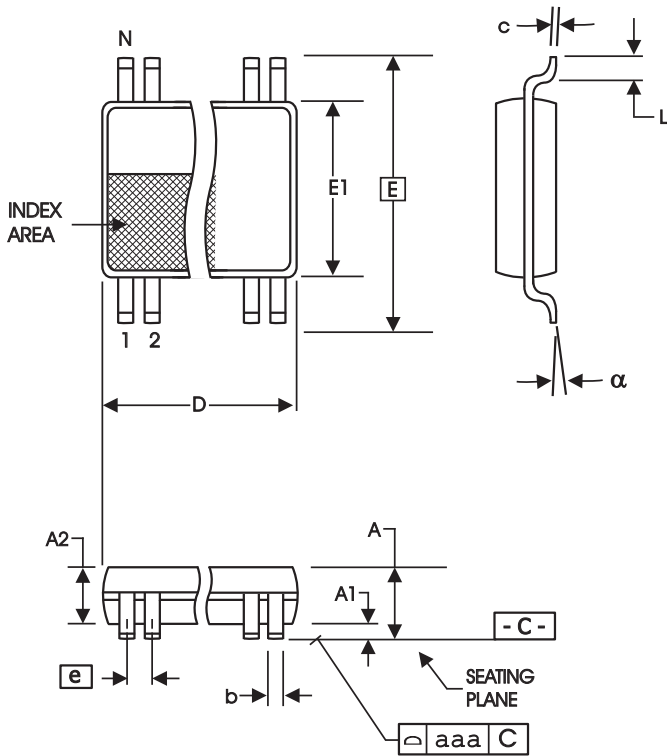

56-Lead 6.10 mm. Body, 0.50 mm. Pitch TSSOP
(240 mil) (20 mil)

| SYMBOL | In Millimeters | | In Inches | |
|--------|----------------|------|----------------|------|
| | MIN | MAX | MIN | MAX |
| A | -- | 1.20 | -- | .047 |
| A1 | 0.05 | 0.15 | .002 | .006 |
| A2 | 0.80 | 1.05 | .032 | .041 |
| b | 0.17 | 0.27 | .007 | .011 |
| c | 0.09 | 0.20 | .0035 | .008 |
| D | SEE VARIATIONS | | SEE VARIATIONS | |
| E | 8.10 BASIC | | 0.319 BASIC | |
| E1 | 6.00 | 6.20 | .236 | .244 |
| e | 0.50 BASIC | | 0.020 BASIC | |
| L | 0.45 | 0.75 | .018 | .030 |
| N | SEE VARIATIONS | | SEE VARIATIONS | |
| alpha | 0° | 8° | 0° | 8° |
| aaa | -- | 0.10 | -- | .004 |

VARIATIONS

| N | D mm. | | D (inch) | |
|----|-------|-------|----------|------|
| | MIN | MAX | MIN | MAX |
| 56 | 13.90 | 14.10 | .547 | .555 |

Reference Doc.: JEDEC Publication 95, MO-153

10-0039

Ordering Information

9LPR502yGLFT

Example:

XXXX **y** **G** **LFT**


Designation for tape and reel packaging

Lead Free, RoHS Compliant

Package Type
G = TSSOP

Revision Designator (will not correlate with datasheet revision)

Device Type

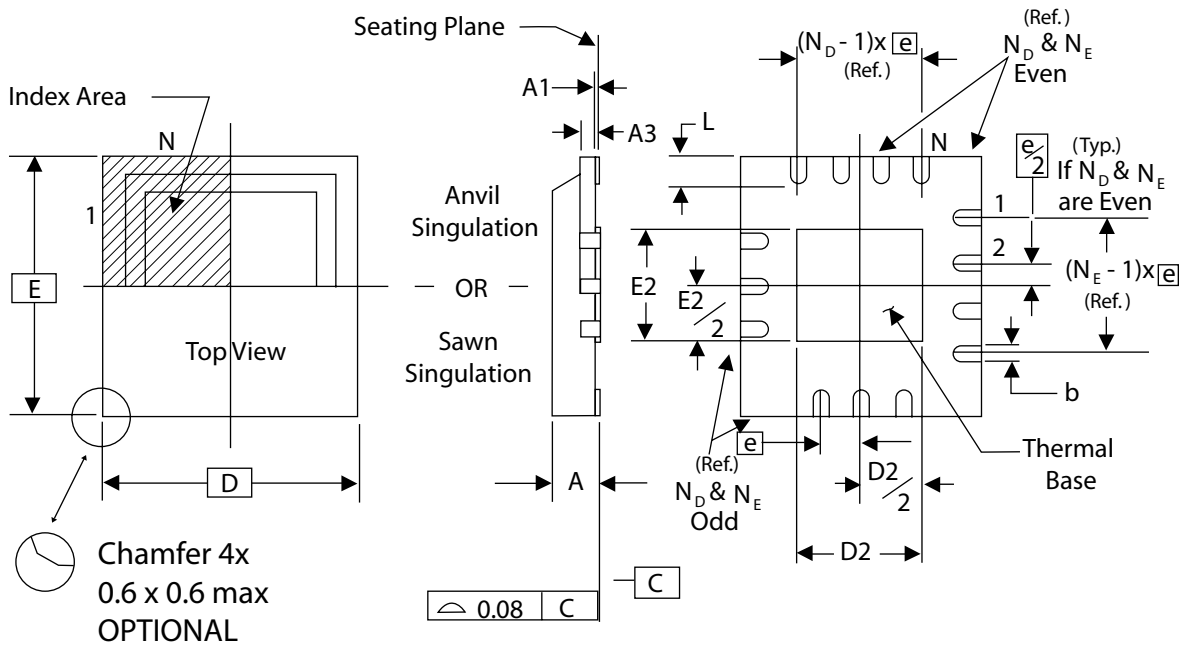

**THERMALLY ENHANCED, VERY THIN, FINE PITCH
QUAD FLAT / NO LEAD PLASTIC PACKAGE**

DIMENSIONS

| SYMBOL | MIN. | MAX. |
|--------|----------------|------|
| A | 0.8 | 1.0 |
| A1 | 0 | 0.05 |
| A3 | 0.25 Reference | |
| b | 0.18 | 0.3 |
| e | 0.50 BASIC | |

DIMENSIONS

| SYMBOL | ICS 56L TOLERANCE |
|----------------|-------------------|
| N | 56 |
| N_D | 14 |
| N_E | 14 |
| D x E BASIC | 8.00 x 8.00 |
| D2 MIN. / MAX. | 4.35 / 4.65 |
| E2 MIN. / MAX. | 5.05 / 5.35 |
| L MIN. / MAX. | 0.30 / 0.50 |

Ordering Information

9LPR502yKLFT

Example:

XXXX y K LFT

- Designation for tape and reel packaging
- Lead Free, RoHS Compliant
- Package Type
K = MLF
- Revision Designator (will not correlate with datasheet revision)
- Device Type

Revision History

| Rev. | Issue Date | Description | Page # |
|------|------------|---|---------|
| A | 2/19/2008 | 1. Updated Table 3: PLL3 Configuration. 2. Release to Final. | 16 |
| B | 2/9/2009 | 1. Updated Electrical tables | Various |
| C | 2/23/2009 | Updated note under Byte 63 Table. | 24 |
| D | 2/26/2009 | Updated Byte 8 Table. | 21 |

Innovate with IDT and accelerate your future networks. Contact:

www.IDT.com

For Sales

800-345-7015
408-284-8200
Fax: 408-284-2775

For Tech Support

408-284-6578
pcclockhelp@idt.com

Corporate Headquarters

Integrated Device Technology, Inc.
6024 Silver Creek Valley Road
San Jose, CA 95138
United States
800 345 7015
+408 284 8200 (outside U.S.)

Asia Pacific and Japan

Integrated Device Technology
Singapore (1997) Pte. Ltd.
Reg. No. 199707558G
435 Orchard Road
#20-03 Wisma Atria
Singapore 238877
+65 6 887 5505

Europe

IDT Europe, Limited
Prime House
Barnett Wood Lane
Leatherhead, Surrey
United Kingdom KT22 7DE
+44 1372 363 339



www.IDT.com

© 2006 Integrated Device Technology, Inc. All rights reserved. Product specifications subject to change without notice. IDT and the IDT logo are trademarks of Integrated Device Technology, Inc. Accelerated Thinking is a service mark of Integrated Device Technology, Inc. All other brands, product names and marks are or may be trademarks or registered trademarks used to identify products or services of their respective owners.
Printed in USA