

"High Frequency Ceramic Solutions"


2.45GHz Impedance Matched Balun-Filter Combo for Atmel Chipset AT86RF232 and AT86RF233 (REB232/REB233)

P/N 2450BM15A0015

Detail Specification: 7/27/2012

Page 1 of 3

General Specifications	
Part Number	2450BM15A0015
Frequency (MHz)	2400~2500
Unbalanced Impedance	50 Ω
Balanced Impedance	Conjugate match to Atmel AT86RF232, AT86RF233
Insertion Loss	1.5 dB max.
Return Loss	9.5 min.
Phase Difference (degree)	180 \pm 10
Amplitude Difference	2.0 dB max.
Operating Temperature	-40 to +85°C
Power Capacity	1 Watt max.
Differential Mode Attenuation	20dB min. @2Fo 20dB min. @3Fo
Common Mode Rejection	20dB min. @2Fo




Solder Paste	SAC 305 type is recommended
Recommended Storage Conditions*	+5 to +35 oC, Humidity 45~75%RH
Reel Quantity	4,000
Storage Period	18 months max.


*18 months in vacuum sealed bag and 1 week cumulative after opened.
For more info go to www.johansontechnology.com/silverleads

Part Number Explanation				
P/N Suffix	Packing Style	Bulk	Suffix = S	eg. 2450BM15A0015S
		T & R	Suffix = E	eg. 2450BM15A0015E
	Termination style	100% Tin	Suffix = None	eg. 2450BM15A0015 (E or S)
	Evaluation Board	2450BM15A0015-EBSMA		

Mechanical Dimensions		
	In	mm
L	0.079 \pm 0.004	2.00 \pm 0.10
W	0.049 \pm 0.004	1.25 \pm 0.10
T	0.031 \pm 0.004	0.80 \pm 0.10
a	0.012 \pm 0.004	0.30 \pm 0.10
b	0.008 \pm 0.004	0.20 \pm 0.10
c	0.012 \pm 0.004 /-0.2	0.30 \pm 0.10
g	0.014 \pm 0.004	0.35 \pm 0.10
p	0.026 \pm 0.002	0.65 \pm 0.05

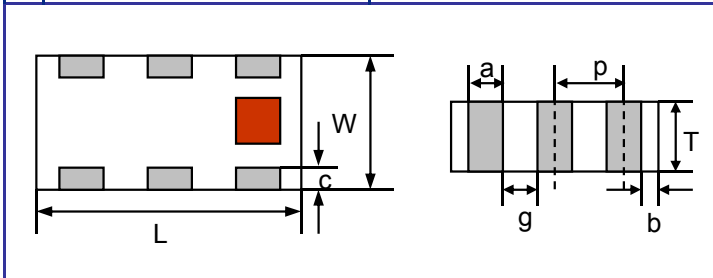

Terminal Configuration	
No.	Function
1	Unbalanced Port (50 Ω)
2	GND
3	Balanced Differential Port
4	Balanced Differential Port
5	GND
6	GND



"High Frequency Ceramic Solutions"


2.45GHz Impedance Matched Balun-Filter Combo for Atmel
Chipset AT86RF232 and AT86RF233 (REB232/REB233)

P/N 2450BM15A0015

Detail Specification: 7/27/2012

Page 2 of 3

Measuring Diagram

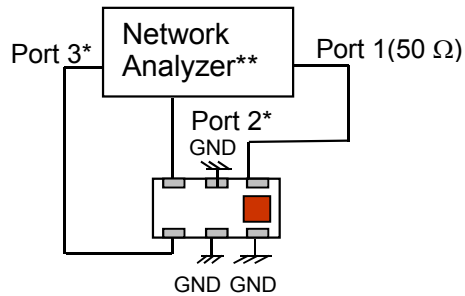


Port 1: Unbalanced Port
Ports 2 and 3: Balanced Port
IL=Sds21
RL=Sss11
Amp_balance = $\text{dB}(S(2,1)/S(3,1))$
Phase_balance = $\text{Phase}(S(2,1)/S(3,1))$
*Impedance for ports 2 and 3
= Conjugate to Balanced Impedance/2

**E5071B from Agilent

Typical Electrical Performance (T=25°C)

Insertion and Return Loss

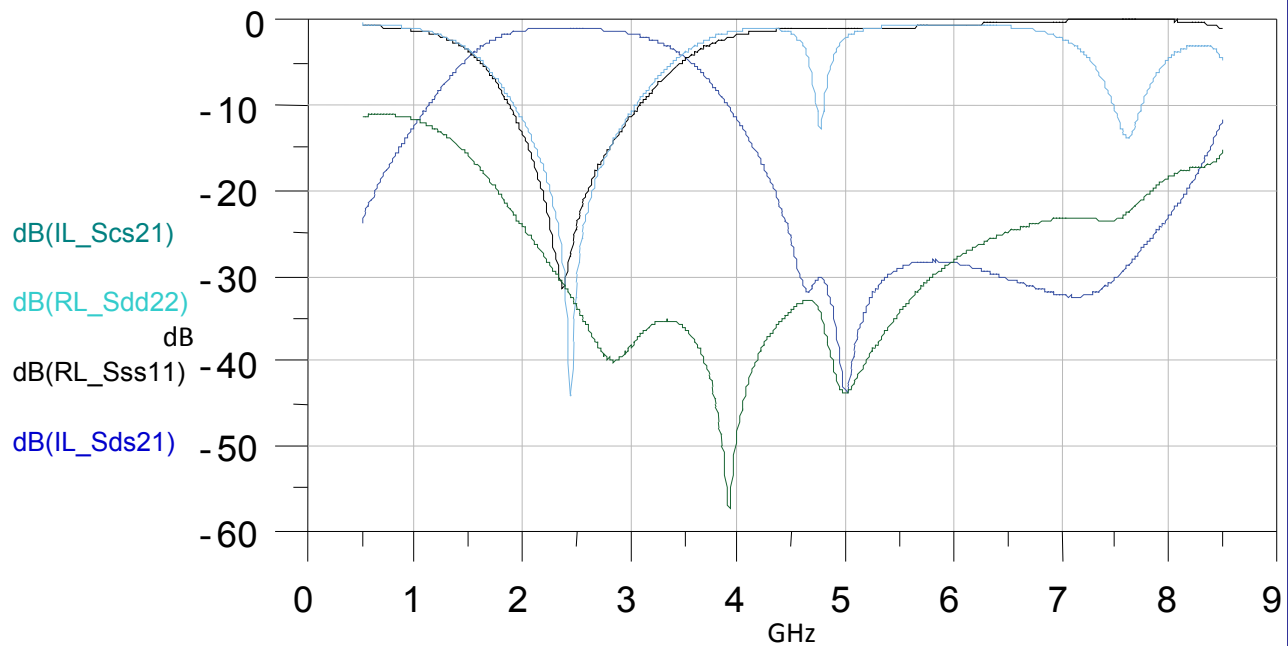

Impedance matching network, balun and harmonic filter all in one EIA 0805 package!

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechnology.com

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2012 Johanson Technology, Inc. All Rights Reserved

"High Frequency Ceramic Solutions"

2.45GHz Impedance Matched Balun-Filter Combo for Atmel
Chipset AT86RF232 and AT86RF233 (REB232/REB233)


P/N 2450BM15A0015

Detail Specification: 7/27/2012

Page 3 of 3

Typical Electrical Performance (T=25°C)

Amplitude and Phase Balance

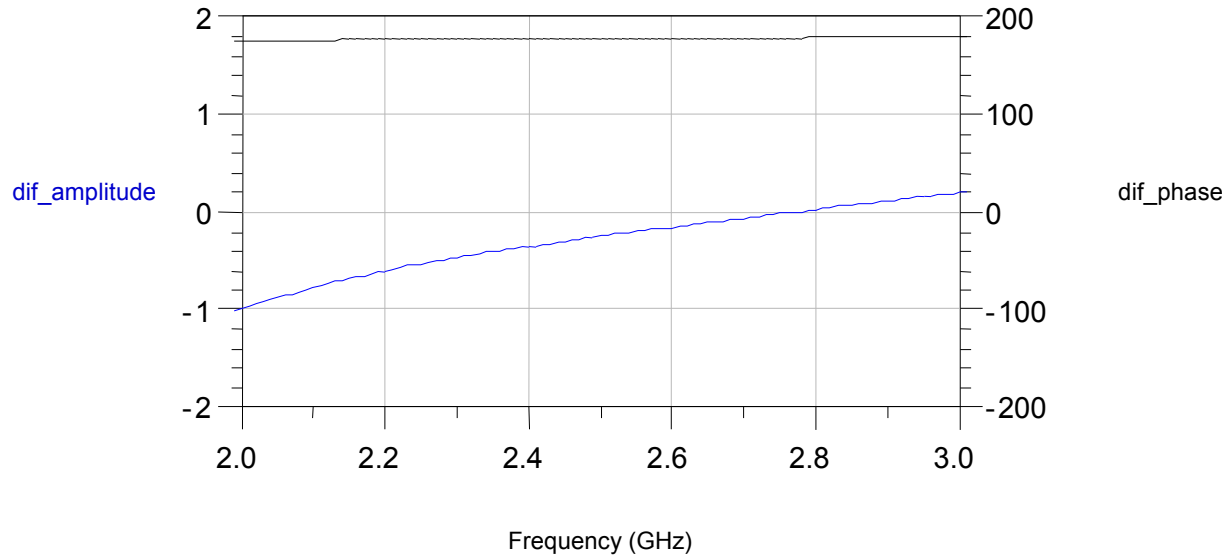


Impedance matching network, balun and harmonic filter all in one EIA 0805 package!

Mounting Considerations

Mount these devices with brown mark facing up.


* Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

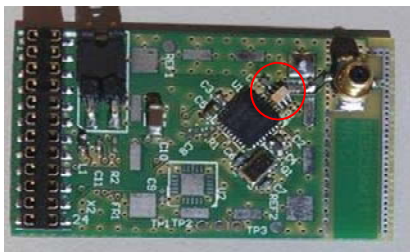

LEGEND

- Solder Resist
- Land
- Through-hole (φ0.3)

Units : mm

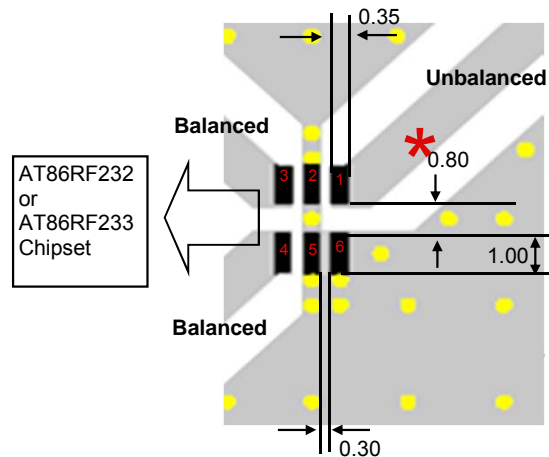

REB233mkII V8.6.1 EVB

Johanson Technology, Inc. reserves the right to make design changes without notice. Please confirm the specifications and delivery conditions when placing your order. All sales are subject to Johanson Technology, Inc. terms and conditions.