

GENERAL INFORMATION

AVX SR Series


Conformally Coated Radial Leaded MLC

Temperature Coefficients: C0G (NP0), X7R, Z5U

200, 100, 50 Volts (300V, 400V & 500V also available)

Case Material: Epoxy


Lead Material: Solderable

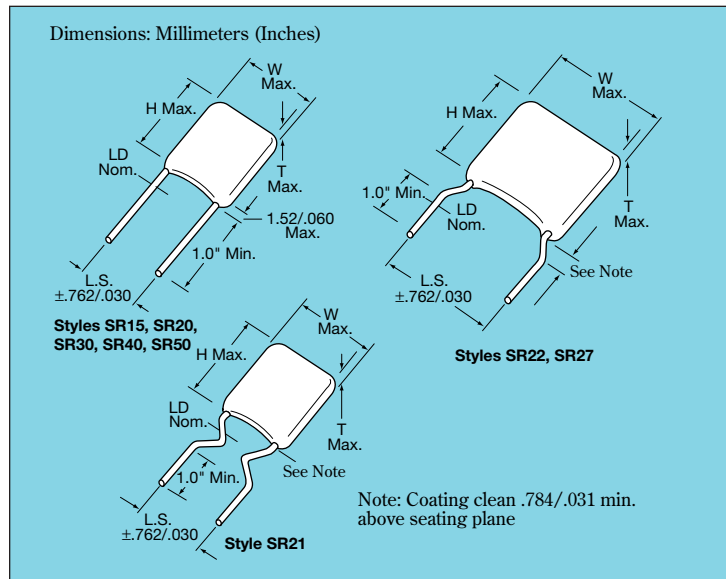

HOW TO ORDER

AVX Styles: SR15, SR20, SR21, SR22, SR27, SR30, SR40, SR50

Part Number Example

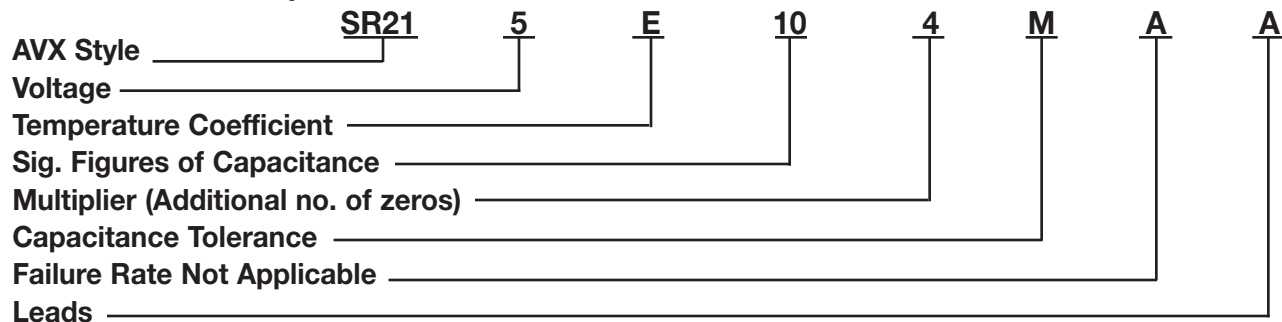

Part Number Codes

Voltages: 50V = 5, 100V = 1, 200V = 2,
300V = 9, 400V = 8, 500V = 7

Temp. Coefficient: C0G (NP0) = A, X7R = C, Z5U = E

Sig. Figures of Capacitance and Multiplier:

First two digits are the significant figures of capacitance. Third digit indicates the additional number of zeros. For example, order 100,000 pF as 104. (For values below 10pF, use "R" in place of decimal point, e.g., 1R4 = 1.4 pF).

Capacitance Tolerances:

C0G (NP0): C = ±.25pF, D = ±.5pF, F = ±1.0% (>50 pF only)
G = ±2.0% (>25 pF only), J = ±5%, K = ±10%
X7R: J = ±5%, K = ±10%, M = ±20%
Z5U: M = ±20%, Z = +80%,-20%


Failure Rate: A = Not Applicable

Leads: T = Trimmed Leads, .230" ± .030"


A = Long Leads, 1.0" minimum
(Other lead lengths are available, contact AVX)

MARKING

FRONT

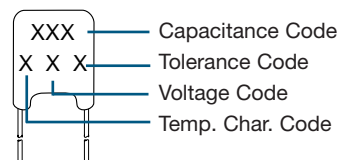

BACK

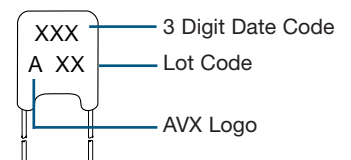

PACKAGING REQUIREMENTS

| | Quantity per Bag |
|--------------------------|------------------|
| SR15, 20, 21, 22, 27, 30 | 1000 Pieces |
| SR40, 50 | 500 Pieces |

Note: SR15, SR20, SR21, SR30, and SR40 available on tape and reel per EIA specifications RS-468. See Pages 24 and 25.

C0G (NP0) Dielectric

SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic

Dimensions: Millimeters (Inches)

| AVX Style | SR15 | SR20 | SR21 | SR22 | SR27 | SR30 | SR40 | SR50 | | | | | | | | |
|---|---------------------|-----------------|-----------------|-----------------|-----------------|----------------|-----------------|-----------------|------|-----|------|----|------|----|-----|----|
| AVX "Insertable" | SR07 | SR29 | SR59 | N/A | N/A | SR65 | SR75 | N/A | | | | | | | | |
| Width (W) | 3.81 (.150) | 5.08 (.200) | 5.08 (.200) | 5.08 (.200) | 6.604 (.260) | 7.62 (.300) | 10.16 (.400) | 12.70 (.500) | | | | | | | | |
| Height (H) | 3.81 (.150) | 5.08 (.200) | 5.08 (.200) | 5.08 (.200) | 6.35 (.250) | 7.62 (.300) | 10.16 (.400) | 12.70 (.500) | | | | | | | | |
| Thickness (T) | 2.54 (.100) | 3.175 (.125) | 3.175 (.125) | 3.175 (.125) | 4.06 (.160) | 3.81 (.150) | 3.81 (.150) | 5.08 (.200) | | | | | | | | |
| Lead Spacing (L.S.) | 2.54 (.100) | 2.54 (.100) | 5.08 (.200) | 6.35 (.250) | 7.62 (.300) | 5.08 (.200) | 5.08 (.200) | 10.16 (.400) | | | | | | | | |
| Lead Diameter (L.D.) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .635 (.025) | | | | | | | | |
| Cap. in.* Industry Preferred pF Values in Blue | WVDC | | WVDC | | WVDC | | WVDC | | WVDC | | WVDC | | WVDC | | | |
| | 200 | 100 | 50 | 200 | 100 | 50 | 200 | 100 | 50 | 200 | 100 | 50 | 100 | 50 | 100 | 50 |
| 1.0-9.9 | SR151A1R0DAA | | | | | | | | | | | | | | | |
| 10 | SR151A100KAA | | | | | | | | | | | | | | | |
| 15 | SR.....A150KAA | | | | | | | | | | | | | | | |
| 22 | SR.....A220KAA | | | | | | | | | | | | | | | |
| 33 | SR.....A330KAA | | | | | | | | | | | | | | | |
| 39 | SR.....A390KAA | | | | | | | | | | | | | | | |
| 47 | SR.....A470KAA | | | | | | | | | | | | | | | |
| 68 | SR.....A680KAA | | | | | | | | | | | | | | | |
| 100 | SR151A101KAA | | | | | | | | | | | | | | | |
| 150 | SR.....A151KAA | | | | | | | | | | | | | | | |
| 220 | SR.....A221KAA | | | | | | | | | | | | | | | |
| 330 | SR.....A331KAA | | | | | | | | | | | | | | | |
| 390 | SR.....A391KAA | | | | | | | | | | | | | | | |
| 470 | SR.....A471KAA | | | | | | | | | | | | | | | |
| 680 | SR.....A681KAA | | | | | | | | | | | | | | | |
| 1000 | SR211A102KAA | | | | | | | | | | | | | | | |
| 1500 | SR.....A152KAA | | | | | | | | | | | | | | | |
| 2200 | SR.....A222KAA | | | | | | | | | | | | | | | |
| 3900 | SR.....A392KAA | | | | | | | | | | | | | | | |
| 4700 | SR.....A472KAA | | | | | | | | | | | | | | | |
| 6800 | SR.....A682KAA | | | | | | | | | | | | | | | |
| 8200 | SR.....A822KAA | | | | | | | | | | | | | | | |
| 10,000 | SR305A103KAA | | | | | | | | | | | | | | | |
| 15,000 | SR.....A153KAA | | | | | | | | | | | | | | | |
| 22,000 | SR.....A223KAA | | | | | | | | | | | | | | | |
| 33,000 | SR.....A333KAA | | | | | | | | | | | | | | | |
| 39,000 | SR.....A393KAA | | | | | | | | | | | | | | | |
| 47,000 | SR.....A473KAA | | | | | | | | | | | | | | | |
| 68,000 | SR.....A683KAA | | | | | | | | | | | | | | | |
| 100,000 | SR.....A104KAA | | | | | | | | | | | | | | | |

For other styles, voltages, tolerances and lead lengths see Part No. Codes or contact factory.

*Other capacitance values available upon special request.

- = Industry preferred values
- = SR20 only

NOTE: Capacitance Ranges available for SR12 same as SR15
 SR62 same as SR21
 SR64 same as SR30
 SR89 same as SR21

X7R Dielectric

SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic

Dimensions: Millimeters (Inches)

| AVX Style | SR15 | SR20 | SR21 | SR22 | SR27 | SR30 | SR40 | SR50 | | | | | | | | | | | | |
|---|----------------|-----------------|-----------------|-----------------|-----------------|----------------|-----------------|-----------------|-----|----|------|-----|----|------|-----|----|-----|-----|----|--|
| AVX "Insertable" | SR07 | SR29 | SR59 | N/A | N/A | SR65 | SR75 | N/A | | | | | | | | | | | | |
| Width (W) | 3.81 (.150) | 5.08 (.200) | 5.08 (.200) | 5.08 (.200) | 6.604 (.260) | 7.62 (.300) | 10.16 (.400) | 12.70 (.500) | | | | | | | | | | | | |
| Height (H) | 3.81 (.150) | 5.08 (.200) | 5.08 (.200) | 5.08 (.200) | 6.35 (.250) | 7.62 (.300) | 10.16 (.400) | 12.70 (.500) | | | | | | | | | | | | |
| Thickness (T) | 2.54 (.100) | 3.175 (.125) | 3.175 (.125) | 3.175 (.125) | 4.06 (.160) | 3.81 (.150) | 3.81 (.150) | 5.08 (.200) | | | | | | | | | | | | |
| Lead Spacing (L.S.) | 2.54 (.100) | 2.54 (.100) | 5.08 (.200) | 6.35 (.250) | 7.62 (.300) | 5.08 (.200) | 5.08 (.200) | 10.16 (.400) | | | | | | | | | | | | |
| Lead Diameter (L.D.) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .635 (.025) | | | | | | | | | | | | |
| Cap. in.* Industry Preferred Values in Blue | WVDC | | | WVDC | | WVDC | | WVDC | | | WVDC | | | WVDC | | | | | | |
| | 200 | 100 | 50 | 200 | 100 | 50 | 100 | 50 | 100 | 50 | 200 | 100 | 50 | 200 | 100 | 50 | 200 | 100 | 50 | |
| 470 | SR.....C471KAA | | | | | | | | | | | | | | | | | | | |
| 1000 | SR155C102KAA | | | | | | | | | | | | | | | | | | | |
| 1500 | SR.....C152KAA | | | | | | | | | | | | | | | | | | | |
| 2200 | SR.....C222KAA | | | | | | | | | | | | | | | | | | | |
| 3300 | SR.....C332KAA | | | | | | | | | | | | | | | | | | | |
| 4700 | SR.....C472KAA | | | | | | | | | | | | | | | | | | | |
| 6800 | SR.....C682KAA | | | | | | | | | | | | | | | | | | | |
| 10,000 | SR215C103KAA | | | | | | | | | | | | | | | | | | | |
| 15,000 | SR.....C153KAA | | | | | | | | | | | | | | | | | | | |
| 22,000 | SR.....C223KAA | | | | | | | | | | | | | | | | | | | |
| 33,000 | SR.....C333KAA | | | | | | | | | | | | | | | | | | | |
| 47,000 | SR.....C473KAA | | | | | | | | | | | | | | | | | | | |
| 68,000 | SR.....C683KAA | | | | | | | | | | | | | | | | | | | |
| 100,000 | SR215C104KAA | | | | | | | | | | | | | | | | | | | |
| 150,000 | SR.....C154KAA | | | | | | | | | | | | | | | | | | | |
| 220,000 | SR215C224KAA | | | | | | | | | | | | | | | | | | | |
| 330,000 | SR.....C334KAA | | | | | | | | | | | | | | | | | | | |
| 390,000 | SR.....C394KAA | | | | | | | | | | | | | | | | | | | |
| 470,000 | SR305C474KAA | | | | | | | | | | | | | | | | | | | |
| 1.0 µF | SR305C105KAA | | | | | | | | | | | | | | | | | | | |
| 2.2 µF | SR405C225KAA | | | | | | | | | | | | | | | | | | | |
| 2.7 µF | SR505C275KAA | | | | | | | | | | | | | | | | | | | |
| 4.7 µF | SR505C475KAA | | | | | | | | | | | | | | | | | | | |

For other styles, voltages, tolerances and lead lengths see Part No. Codes or contact factory.

*Other capacitance values available upon special request.

= Industry preferred values

= SR20 only

NOTE: Capacitance Ranges available for SR12 same as SR15
 SR62 same as SR21
 SR64 same as SR30
 SR89 same as SR21

Z5U Dielectric

SIZE AND CAPACITANCE SPECIFICATIONS

EIA Characteristic

Dimensions: Millimeters (Inches)

| AVX Style | SR15 | SR20 | SR21 | SR22 | SR27 | SR30 | SR40 | SR50 |
|--|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| AVX "Insertable" | SR07 | SR29 | SR59 | N/A | N/A | SR65 | SR75 | N/A |
| Width (W) | 3.81 (.150) | 5.08 (.200) | 5.08 (.200) | 5.08 (.200) | 6.604 (.260) | 7.62 (.300) | 10.16 (.400) | 12.70 (.500) |
| Height (H) | 3.81 (.150) | 5.08 (.200) | 5.08 (.200) | 5.08 (.200) | 6.35 (.250) | 7.62 (.300) | 10.16 (.400) | 12.70 (.500) |
| Thickness (T) | 2.54 (.100) | 3.175 (.125) | 3.175 (.125) | 3.175 (.125) | 4.06 (.160) | 3.81 (.150) | 3.81 (.150) | 5.08 (.200) |
| Lead Spacing (L.S.) | 2.54 (.100) | 2.54 (.100) | 5.08 (.200) | 6.35 (.250) | 7.62 (.300) | 5.08 (.200) | 5.08 (.200) | 10.16 (.400) |
| Lead Diameter (L.D.) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .508 (.020) | .635 (.025) |
| Cap. in.* Industry Preferred Values in Blue | WVDC 100 50 | WVDC 100 50 | WVDC 100 50 | WVDC 100 50 | WVDC 100 50 | WVDC 100 50 | WVDC 100 50 | WVDC 100 50 |
| 10,000 | SR155E103ZAA | | | | | | | |
| 47,000 | SR.....E473ZAA | | | | | | | |
| 100,000 | SR215E104ZAA | | | | | | | |
| 150,000 | SR.....E154ZAA | | | | | | | |
| 220,000 | SR215E224ZAA | | | | | | | |
| 330,000 | SR215E334ZAA | | | | | | | |
| 470,000 | SR215E474ZAA | | | | | | | |
| 680,000 | SR.....E684ZAA | | | | | | | |
| 1.0 µF | SR.....105ZAA | | | | | | | |
| 1.5 µF | SR30E155ZAA | | | | | | | |
| 2.2 µF | SR30E225ZAA | | | | | | | |
| 3.3 µF | SR30E335ZAA | | | | | | | |
| 4.7 µF | SR30E475ZAA | | | | | | | |

For other styles, voltages, tolerances and lead lengths see Part No. Codes or contact factory.

*Other capacitance values available upon special request.

= Industry preferred values

= SR20 only



AVX 500 VOLT SKYCAPS**

| STYLE* | MAXIMUM CAPACITANCE VALUE | |
|--------|---------------------------|---------|
| | COG (NP0) | X7R |
| SR29 | 900 pF | .015 µF |
| SR20 | 1800 pF | .033 µF |
| SR28 | 900 pF | .015 µF |
| SR59 | | |
| SR13 | 1800 pF | .033 µF |
| SR21 | | |
| SR30 | 7200 pF | .12 µF |
| SR61 | | |
| SR65 | | |
| SR40 | .015 µF | .27 µF |
| SR75 | | |
| SR22 | 1800 pF | .033 µF |
| SR27 | 1800 pF | .033 µF |
| SR76 | .015 µF | .27 µF |
| SR50 | .036 µF | .59 µF |






*Consult pages 18 and 19 for style sizes.

**Voltage rating based on DWV of 150% of rated voltage.

Configurations by Lead Spacing

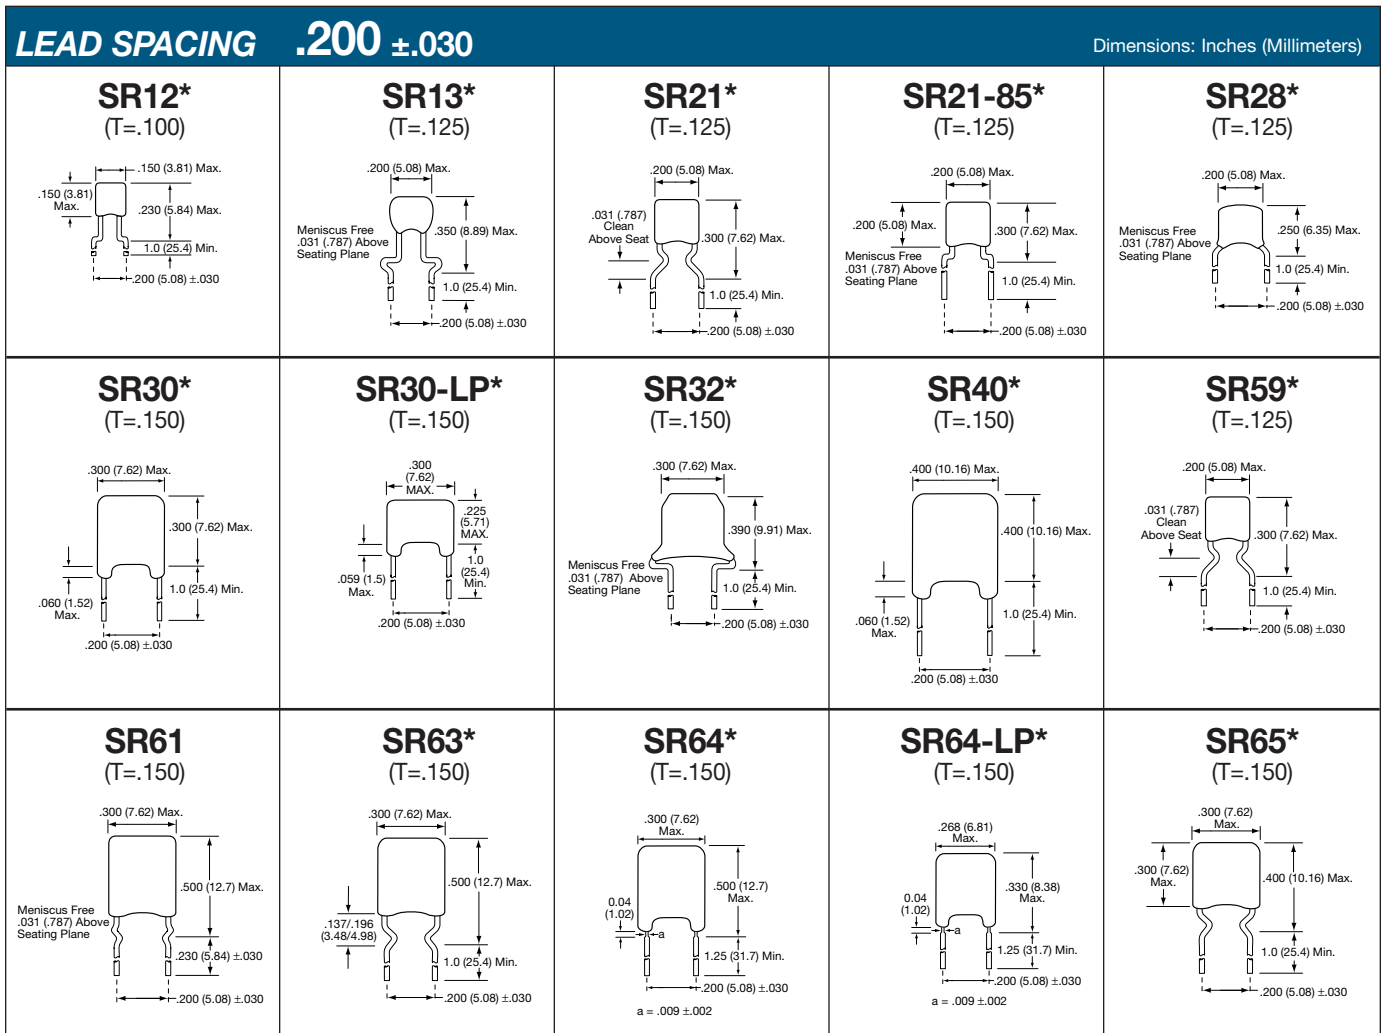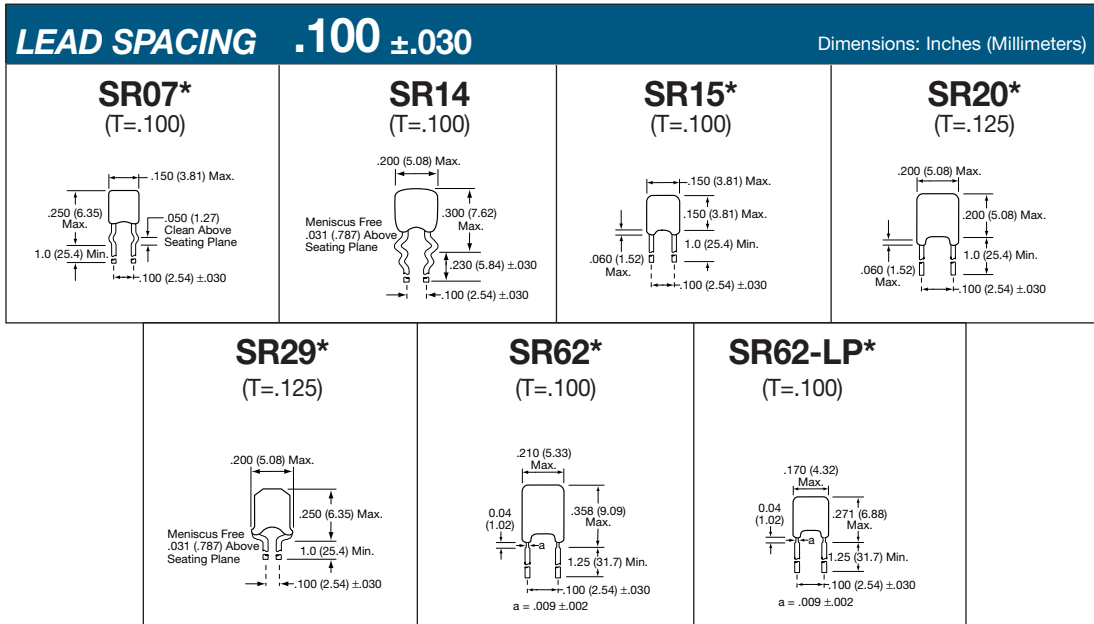

Configurations by Lead Spacing

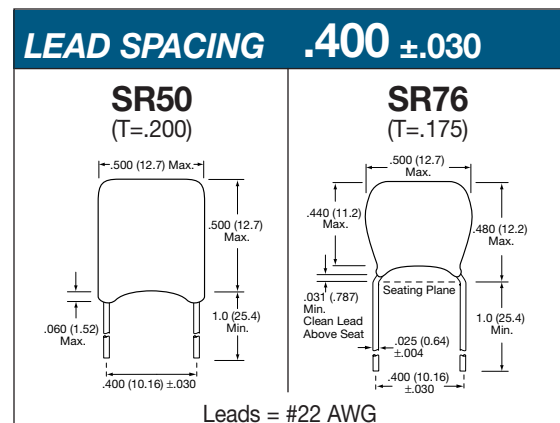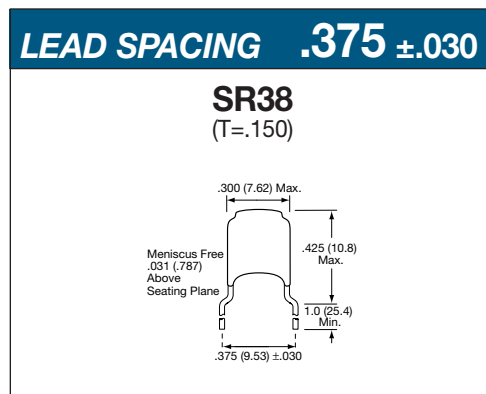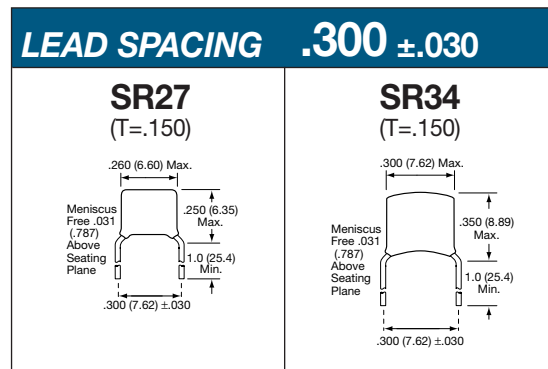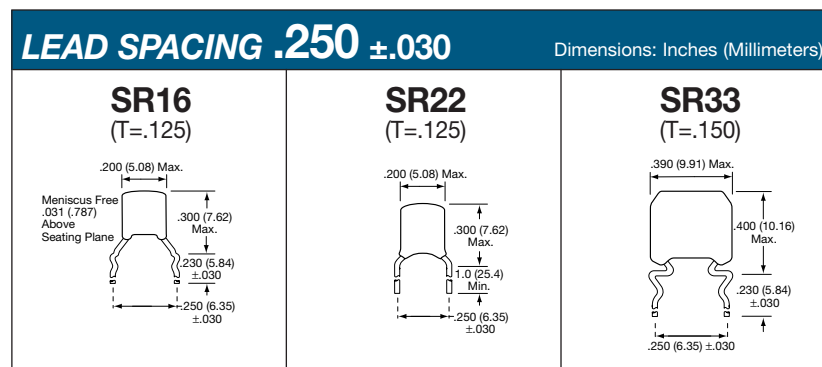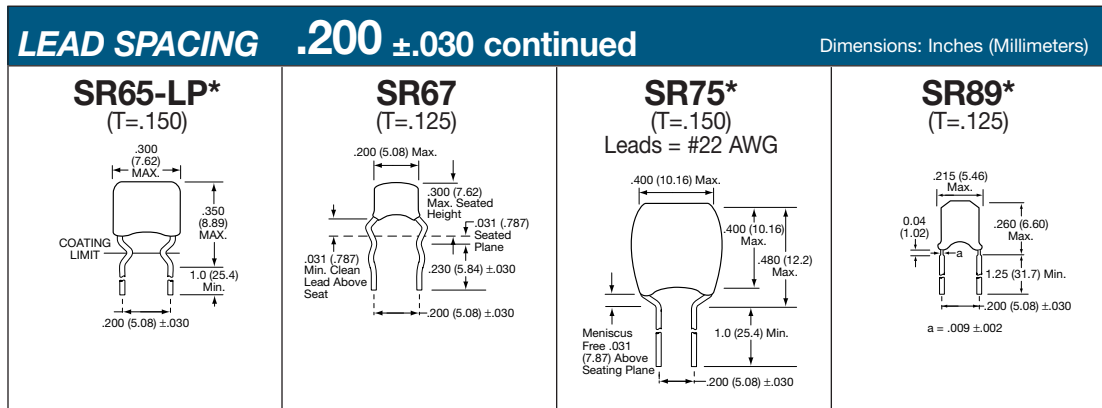

- NOTES:**
1. All leads are #24 AWG unless otherwise noted.
 2. Available in tape and reel packaging(*).
 3. Other styles are also available, contact factory.
 4. (T = XXX) under type designation is maximum thickness in inches.

Tape and Reel

GENERAL INFORMATION

1. Standard reel diameter is 355 millimeters (14 inches) maximum.
2. Reeling standard (#1 or #2) should be specified when ordering.

HOW TO ORDER


To specify tape and reel packaging, add TR1, TR2 or TRX to the end of the AVX 12 digit part number.

Examples:


SR215C104KAATR1
SR305E105MAATR2
SR215C103JAATTRX

The Insertables

STANDARD 1

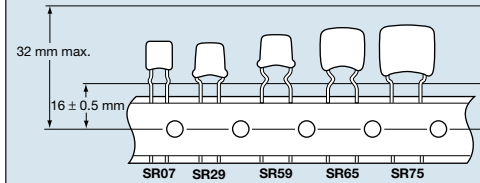


STANDARD 2

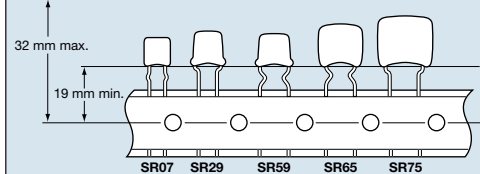



STANDARD 1

Dimensions in Millimeters

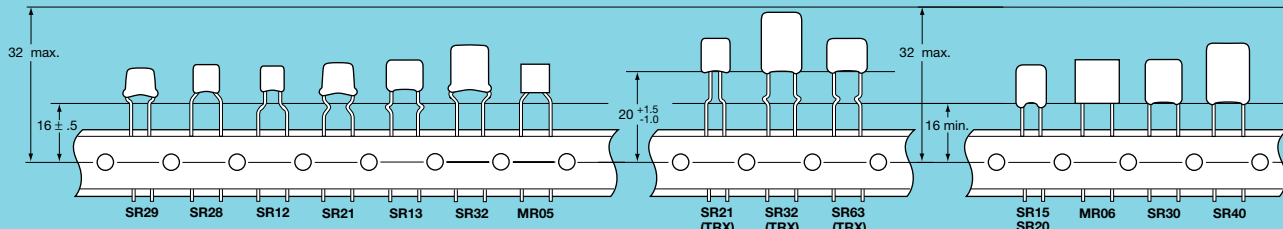

STANDARD 2


Dimensions in Millimeters

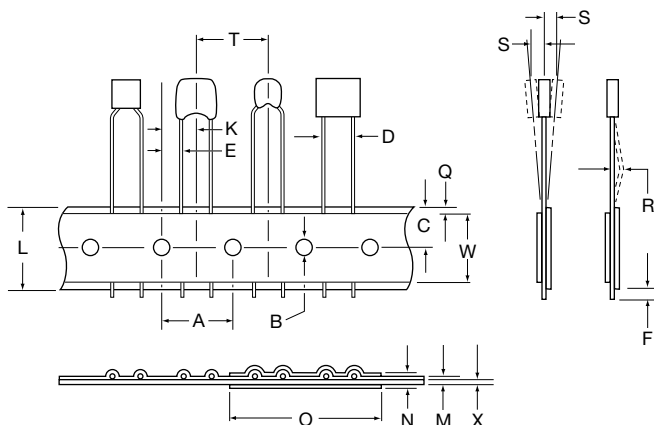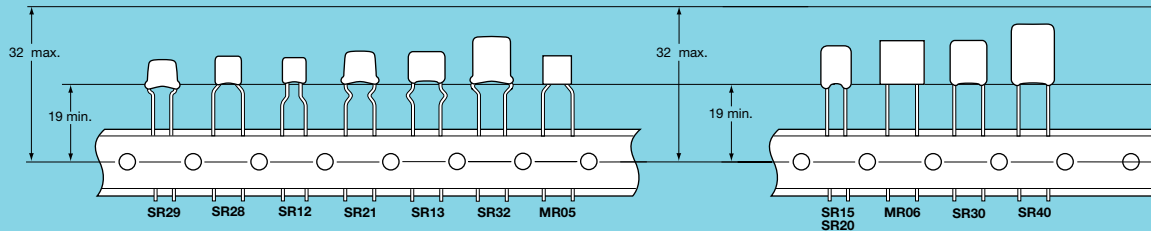


DESCRIPTION

DIMENSIONS (MM)

| | |
|--|--|
| A. Feed Hole Pitch | 12.70 ± .20 |
| B. Feed Hole Diameter | 3.99 ± .20 |
| C. Feed Hole Location | 9.02 ± .51 |
| D. Component Lead Spacing | 5.00 ^{+0.79} _{-.20} or 2.54 ^{+0.79} _{-.20} |
| E. Component Lead Location | 3.81 ± .51 or 5.00 ± .51 for 2.54 lead spacing |
| F. Component Lead Protrusion (edge of carrier to cut end of lead) | 2.00 maximum |
| K. Component Body Location | 6.35 ± .41 |
| L. Carrier Tape Width | 18.01 ± 1.02 -.51 |
| M. Carrier Tape Assembly Thickness | .71 ± .20 |
| N. Carrier Tape Spliced Thickness | 1.42 maximum |
| O. Carrier Tape Spliced Length | 50.80 - 88.90 |
| Q. Adhesive Tape Border | 3.00 maximum |
| R. Component Bent Leads (either direction) | .79 maximum |
| S. Component Misalignment | .99 maximum |
| T. Component Pitch | 12.70 ± .99 |
| W. Adhesive Tape Width | 5.00 minimum |
| X. Carrier Tape Thickness | .51 ± .10 |
| Y. Cumulative Pitch over 20 Pitches | 254 ± 2.00 |

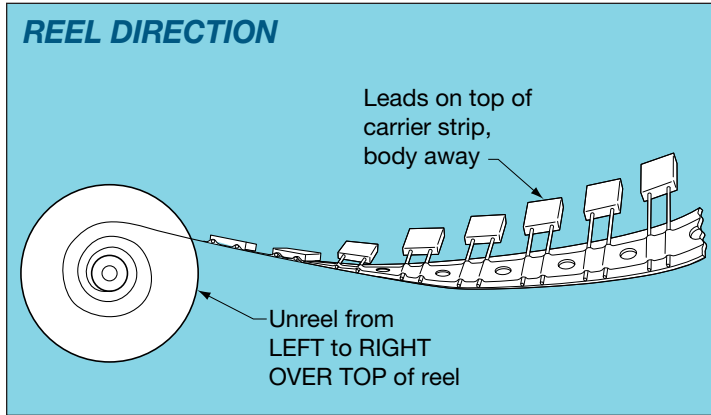

| QUANTITY PER REEL | |
|--|------|
| PART | PCS |
| SR15, 07, 12 | 3500 |
| SR20, 21, 23, 28 13, 29, 59, 62, 89 | 3000 |
| SR30, 32, 40, 63, 64 65, 75 | 2000 |
| MR05, 06 | 2500 |

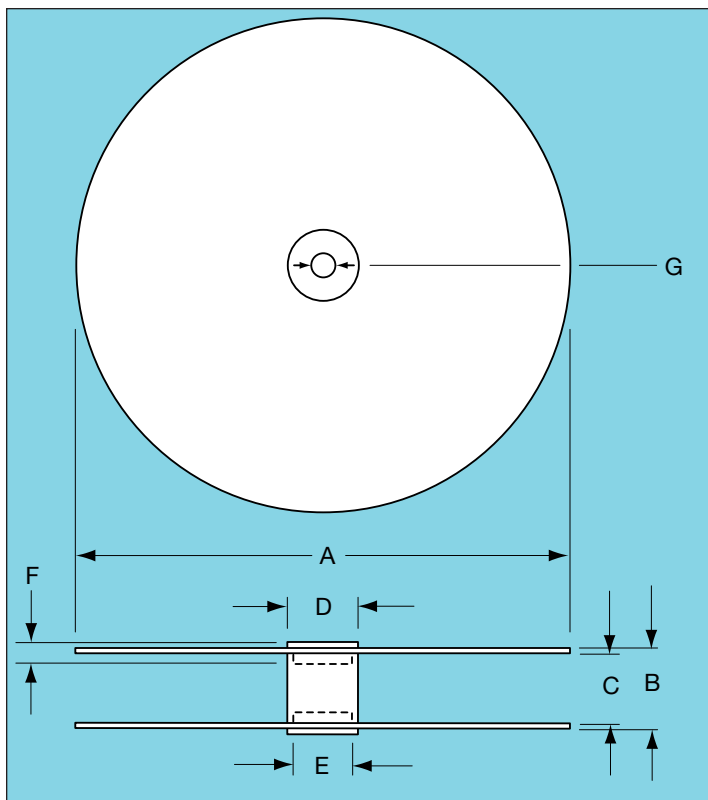

| DESCRIPTION | DIMENSIONS (MM) |
|--------------------------|-----------------|
| A – Reel Diameter | 304.80 - 355 |
| B – Reel Outside Width | 50.80 maximum |
| C – Reel Inside Width | 38.10 - 46.02 |
| D – Core Diameter (O.D.) | 102.01 maximum |
| E – Hub Recess Diameter | 86.36 maximum |
| F – Hub Recess Depth | 9.50 minimum |
| G – Arbor Hole Diameter | 25.40 - 30.48 |

| CONVERSION TABLE | | | | | | | | | |
|------------------|------|------|------|------|------|-------|-------|--------|--------|
| MM | IN | MM | IN | MM | IN | MM | IN | MM | IN |
| .10 | .004 | 1.52 | .060 | 5.00 | .197 | 9.91 | .390 | 32.00 | 1.260 |
| .20 | .007 | 2.00 | .079 | 5.08 | .200 | 10.03 | .395 | 38.10 | 1.500 |
| .38 | .015 | 2.54 | .100 | 6.22 | .245 | 10.16 | .400 | 46.02 | 1.812 |
| .41 | .016 | 3.00 | .118 | 6.35 | .250 | 11.68 | .460 | 50.80 | 2.000 |
| .51 | .020 | 3.18 | .125 | 6.60 | .260 | 12.50 | .492 | 86.36 | 3.400 |
| .71 | .028 | 3.48 | .137 | 6.99 | .275 | 12.70 | .500 | 88.90 | 3.500 |
| .79 | .031 | 3.81 | .150 | 7.62 | .300 | 16.00 | .630 | 102.01 | 4.016 |
| .99 | .039 | 3.99 | .157 | 8.89 | .350 | 18.01 | .709 | 254.00 | 10.000 |
| 1.02 | .040 | 4.45 | .175 | 9.02 | .355 | 25.40 | 1.000 | 304.80 | 12.000 |
| 1.42 | .056 | 4.98 | .196 | 9.50 | .374 | 30.48 | 1.200 | 355.00 | 14.000 |