


PIN HEADERS

- Industry compatible
- Competitively priced
- Various plated contacts available
- 2.54mm pitch

SINGLE ROW STRAIGHT

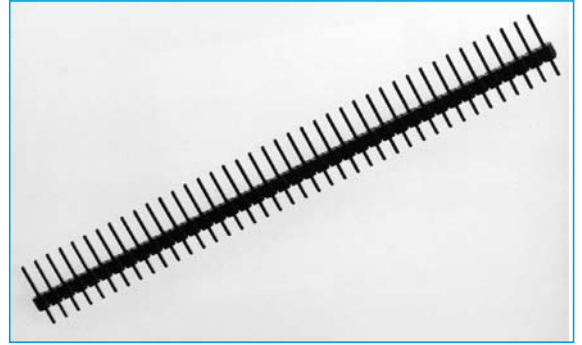


SECTION 8

SPECIFICATION

Material & Finish


Contact Material:	Brass
Insulator Material:	PBT & Glass-Fibre Reinforced UL94V-0
Current Rating:	1 A DC
Contact Resistance:	30M Ω Max at 6V DC 0.3A
Insulator Resistance:	1000M Ω Min at 500V DC
Dielectric Withstanding	
Voltage:	500V AC for One Minute
Operating Temperature:	-40°C to + 105°C

OUTLINE DRAWING

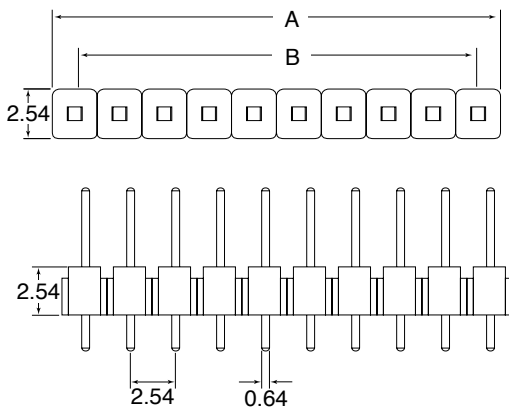

$$A = 2.54 \times N^{\circ} \text{ of Positions}$$

$$B = (2.54 \times N^{\circ} \text{ of Positions}) - 1$$



For other dimension variations please consult office

ORDERING INFORMATION

DBC	PH	C15	04	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	N° of Ways 02=02way Thro to 40=40way	Contact Material A=Brass	Contact Plating G= Gold Flash S=Selective T=Tin Plated other plating Available	Colour 1=Black	Unique Special Code *See Below

*Dubilier will allocate a special code to distinguish pin lengths if required