

## **SPECIFICATIONS**

### Mechanical

Mating Force: 4.50kg (9.92Lb) max.

**Unmating Force:** 1.00~4.00kg (2.20~8.82Lb)

Durability: 100 Cycles

### **Electrical**

Current Rating: 1.50A

Contact Resistance:  $30m\Omega$  max.

Dielectric Withstanding Voltage: 500V AC/1min min.

Insulation Resistance:  $1000M\Omega$  min.

### **Physical**


Housing: Thermoplastic, UL 94V-0 rated in Ivory Color

Contact: Copper alloy


Plating: See "ORDERING INFORMATION" Operating Temperature:  $-20^{\circ}C$  to  $+85^{\circ}C$  Resistance to Soldering Heat:  $270^{\circ}C/10$ sec Recommended Thickness of P.C.B.: 1.57[.062]

## **DVI** Connector

QH Series Normal Type, T/H 1.905mm [.075"] Pitch 29 Pin



# **DRAWING**

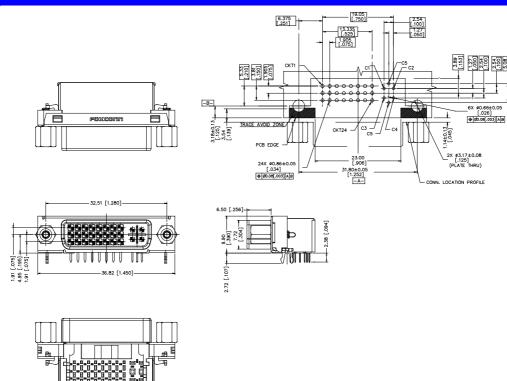

# ORDERING INFORMATION

