


KEMET Part Number: T491A336K006AT
(B45196H1336K109, T491A336K006AS)

Tantalum, MnO2 Tantalum, KEMET, T491, 33 uF, 10%, 6.3 V, 3216, SMD, MnO2, Molded, 2.5 Ohms, 1.8mm

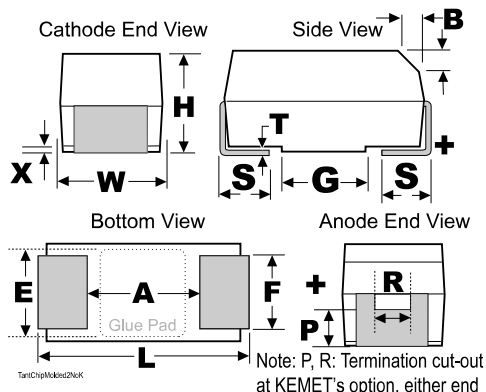

General Information	
Dielectric:	MnO2 Tantalum
Style:	SMD Chip
Supplier:	KEMET
Series:	T491
Description:	SMD, MnO2, Molded
RoHS:	Yes
Termination:	Tin

Specifications	
Capacitance:	33 uF
Capacitance Tolerance:	10%
Voltage DC:	6.3 VDC (85C), 4.22 VDC (125C)
Temperature Range:	-55/+125C
Dissipation Factor:	12%
Failure Rate:	N/A
Resistance:	2.5 Ohms (100kHz)
Current:	173 mAmps (25C), 155.7 mAmps (85C), 69.2 mAmps (125C)
Leakage:	2.1 uAmps

Dimensions	
Footprint	3216
L	3.2mm +/-0.2mm
W	1.6mm +/-0.2mm
H	1.6mm +/-0.2mm
T	0.13mm REF
S	0.8mm +0.2/-0.3mm
F	1.2mm +/-0.1mm
A	1.2mm MIN
B	0.4mm +/-0.15mm
E	1.3mm REF
G	1.1mm REF
P	0.4mm REF
R	0.4mm REF
X	0.1mm +/-0.1mm

Packaging Specifications	
Weight:	58.6 mg
Packaging:	T&R, 178mm
Packaging Quantity:	2000