


KEMET Part Number: T520A227M2R5ATE025
(T520A227M2R5ASE025)

Tantalum, Polymer Tantalum, KEMET, T520, 220 uF, 20%, 2.5 V, 3216, SMD, Polymer, Molded, Low ESR, Non-Combustible, 25 mOhms, 1.8mm

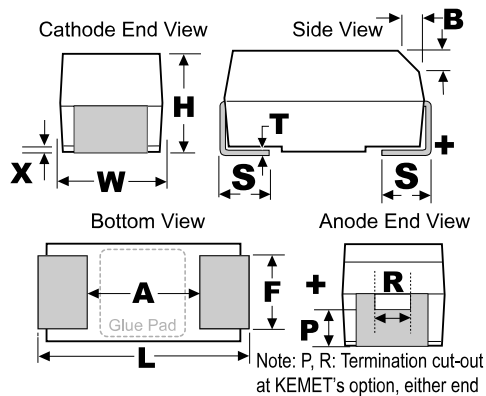

General Information	
Dielectric:	Polymer Tantalum
Style:	SMD Chip
Supplier:	KEMET
Series:	T520
Description:	SMD, Polymer, Molded, Low ESR, Non-Combustible
Features:	Low ESR
RoHS:	Yes
Termination:	Tin

Dimensions	
Footprint	3216
L	3.2mm +/-0.2mm
W	1.6mm +/-0.2mm
H	1.6mm +/-0.2mm
T	0.13mm REF
S	0.8mm +/-0.3mm
F	1.2mm +/-0.1mm
A	1.2mm MIN
P	0.4mm REF
R	0.4mm REF
X	0.1mm +/-0.1mm

Specifications	
Capacitance:	220 uF
Capacitance Tolerance:	20%
Voltage DC:	2.5 VDC (105C)
Temperature Range:	-55/+105C
Dissipation Factor:	8% 120Hz 25C
Failure Rate:	N/A
Resistance:	25 mOhms (100kHz 25C)
Current:	1732 mAmps (100kHz 45C), 1212.4 mAmps (85C), 822.7 mAmps (105C)
Leakage:	55 uAmps (5min 5C)

Packaging Specifications	
Weight:	53.16 mg
Packaging:	T&R, 178mm
Packaging Quantity:	2000