


KEMET Part Number: T520C157M010ATE055
(T520C157M010ASE055)

Tantalum, Polymer Tantalum, KEMET, T520, 150 uF, 20%, 10 V, 6032, SMD, Polymer, Molded, Low ESR, Non-Combustible, 55 mOhms, 2.8mm

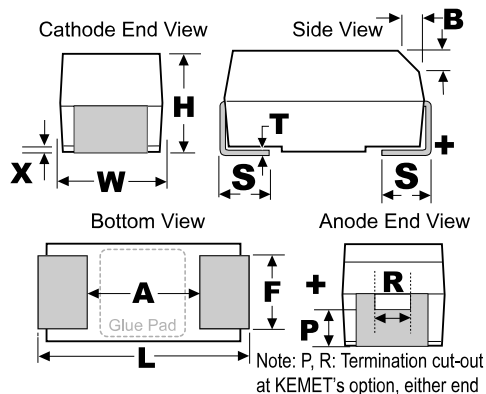

General Information	
Dielectric:	Polymer Tantalum
Style:	SMD Chip
Supplier:	KEMET
Series:	T520
Description:	SMD, Polymer, Molded, Low ESR, Non-Combustible
Features:	Low ESR
RoHS:	Yes
Termination:	Tin

Dimensions	
Footprint	6032
L	6mm +/-0.3mm
W	3.2mm +/-0.3mm
H	2.5mm +/-0.3mm
T	0.13mm REF
S	1.3mm +/-0.3mm
F	2.2mm +/-0.1mm
A	2.9mm MIN
B	0.5mm +/-0.15mm
P	0.9mm REF
R	1mm REF
X	0.1mm +/-0.1mm

Specifications	
Capacitance:	150 uF
Capacitance Tolerance:	20%
Voltage DC:	10 VDC (105C)
Temperature Range:	-55/+105C
Dissipation Factor:	8% 120Hz 25C
Failure Rate:	N/A
Resistance:	55 mOhms (100kHz 25C)
Current:	1700 mAmps (100kHz 45C), 1190 mAmps (85C), 807.5 mAmps (105C)
Leakage:	150 uAmps (5min 5C)

Packaging Specifications	
Weight:	184.14 mg
Packaging:	T&R, 178mm
Packaging Quantity:	500