

[Molex.com](#)

English
日本語
한국어
简体中文

[Register | Login](#)
[My Parts \(0 items \)](#)

Search site:Search: [Go](#)

- Product Name**
- Cross-Ref**
- Catalog**
- Literature**
- Industries**
- Standards**
- Contact Us**
- About Us**
- Investors**
- Careers**

- [Connectors](#)
- [Sockets](#)
- [I/O Connectors](#)
- [Cable Assemblies](#)
- [Fiber Optics](#)
- [Printed Circuit Products](#)
- [Industrial Products](#)
- [Lighting Products](#)

Switch Language

- [Home](#)
- [Crimp Housings](#)
- [Datasheet](#)

Need Assistance?

- [Contact Us](#)
- [Find a Distributor](#)
- [Order Samples](#)
- [Tech Library](#)
- [Ecocare](#)
- [Electrical Models](#)

[Printer-friendly page](#)

[Email this page](#)


Part Number:
0003091011

Status:
Active

Overview:
Standard .093"

Description:
2.36mm (.093") Diameter Standard .093 Pin and Socket Receptacle Housing, 1 Circuit, Friction Lock

Documents: *Note - Please disable browser pop-up blockers for documents on www.molex.com*
[Drawing \(PDF\)](#) [Product Specification PS-02-09 \(PDF\)](#)

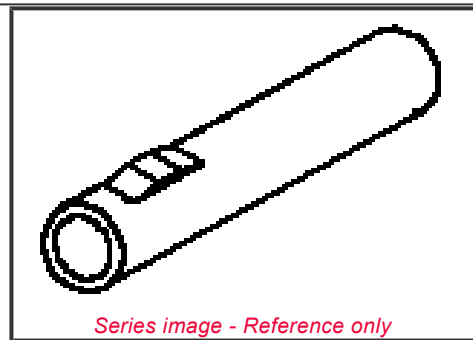

Series image - Reference only

EU RoHS
ELV and RoHS
Compliant

REACH SVHC
Contains SVHC: No

Halogen-Free
Status
Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[1619Series](#)

Mates With

1619p

Use With

[1189](#) Crimp Terminals, [1190](#) Crimp Terminals, [1376](#) Male PC Tail Terminals, [1377](#) Female PC Tail Terminals, [1380](#) Male Crimp Terminals, [1381](#) Female Crimp Terminals, [1433](#) Crimp Terminals, [1434](#) Male Crimp Terminals, [1973](#), [2151](#), [2273](#), [2870](#), [2871](#), [4272](#), [4550](#), [6271](#), [6310](#), [42477](#), [42478](#)

[Product Specification PS-42477 \(PDF\)](#)

[Pr](#)

Order Products:

Part Detail: ([show all](#))

[GeneralPhysicalElectricalAgency CertificationMaterial InfoReference - Drawing Numbers](#)

General

Product Family	Crimp Housings
Series	<u>1619</u>
Comments	17.0A max. can be achieved when housing is used with 42477 or 42478 terminals
Overview	<u>Standard .093"</u>
Product Name	Standard .093"

Physical

Circuits (maximum)	1
Color - Resin	Natural
Flammability	94V-2
Gender	Dual
Glow-Wire Compliant	No
Material - Resin	Nylon
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.198 In
Pitch - Mating Interface (mm)	5.03 mm
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Electrical(Please review the Product Specification for specific details.)

Current - Maximum per Contact	14A
-------------------------------	-----

Agency Certification

CSA	LR19980
TUV	R9351032
UL	E29179

Material Info

Old Part Number	1619-1R1B5N1A5
-----------------	----------------

Reference - Drawing Numbers

Product Specification	PS-02-09, PS-42477, PS-43660-9999
Sales Drawing	SD-1619-1R*

- [Feedback](#)
- [Privacy](#)
- [Legal](#)
- [Site Map](#)
- [Help](#)

• Find us on

Copyright 2005-2010

