

[Molex.com](#)

English
日本語
한국어
简体中文

[Register](#) | [Login](#)
[My Parts \(0 items \)](#)

Search site: Search: [Go](#)

- Product Name**
- Cross-Ref**
- Catalog**
- Literature**
- Industries**
- Standards**
- Contact Us**
- About Us**
- Investors**
- Careers**

- [Connectors](#)
- [Sockets](#)
- [I/O Connectors](#)
- [Cable Assemblies](#)
- [Fiber Optics](#)
- [Printed Circuit Products](#)
- [Industrial Products](#)
- [Lighting Products](#)

Switch Language

- [Home](#)
- [Crimp Housings](#)
- [Datasheet](#)

Need Assistance?

- [Contact Us](#)
- [Find a Distributor](#)
- [Order Samples](#)
- [Tech Library](#)
- [Ecocare](#)
- [Electrical Models](#)

[Printer-friendly page](#)

[Email this page](#)


Part Number:
0009508051

Status:
Active

Overview:
KK®

Description:
3.96mm (.156") Pitch KK® Crimp Terminal Housing, Friction Ramp, 5 Circuits

Documents: *Note - Please disable browser pop-up blockers for documents on www.molex.com*
[Drawing \(PDF\)](#) [Product Specification PS-08-50 \(PDF\)](#) [3D](#)

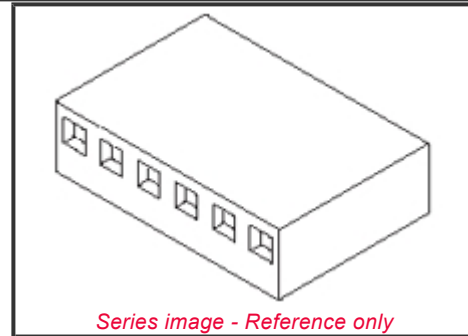

EU RoHS
ELV and RoHS
Compliant



REACH SVHC
Contains SVHC: No

Halogen-Free
Status
Not Halogen-Free

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[41695Series](#)

Use With

KK® Crimp Terminal [2478](#), [2578](#), [8818](#)
 Trifurcon™ Crimp Terminal [7258](#),
[6438](#), [6838](#)

Model

Packag

Order Products:

Part Detail: ([show all](#))

[General](#)[Physical](#)[Agency Certification](#)[Material Info](#)[Reference - Drawing Numbers](#)

General

Product Family	Crimp Housings
Series	41695
Overview	KK®
Product Name	KK®

Physical

Breakaway	No
Circuits (maximum)	5
Color - Resin	Natural
Flammability	94V-0
Gender	Female
Glow-Wire Compliant	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Polyester
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.156 In
Pitch - Mating Interface (mm)	3.96 mm
Temperature Range - Operating	0°C to +75°C

Agency Certification

CSA	LR19980
UL	E29179

Material Info

Old Part Number	41695-N-B05
-----------------	-------------

Reference - Drawing Numbers

Product Specification	PS-08-50
Sales Drawing	SD-41695