

[Molex.com](#)

English
日本語
한국어
简体中文

[Register](#) | [Login](#)
[My Parts \(0 items \)](#)

Search site: Search: [Go](#)

- Product Name**
- Cross-Ref**
- Catalog**
- Literature**
- Industries**
- Standards**
- Contact Us**
- About Us**
- Investors**
- Careers**

- [Connectors](#)
- [Sockets](#)
- [I/O Connectors](#)
- [Cable Assemblies](#)
- [Fiber Optics](#)
- [Printed Circuit Products](#)
- [Industrial Products](#)
- [Lighting Products](#)

Switch Language

English

- [Home](#)
- [Crimp Housings](#)
- [Datasheet](#)

Need Assistance?

- [Contact Us](#)
- [Find a Distributor](#)
- [Order Samples](#)
- [Tech Library](#)
- [Ecocare](#)
- [Electrical Models](#)

[Printer-friendly page](#)

[Email this page](#)


Part Number:
0022552101

Status:
Active

Overview:
C-Grid® / SL™ Products

Description:
2.54mm (.100") Pitch SL™ Crimp Housing, Dual Row, Version A, Nonpolarized, 10 Circuits

Documents: *Note - Please disable browser pop-up blockers for documents on www.molex.com*
[Drawing \(PDF\)](#) [Product Specification PS-70058 \(PDF\)](#)

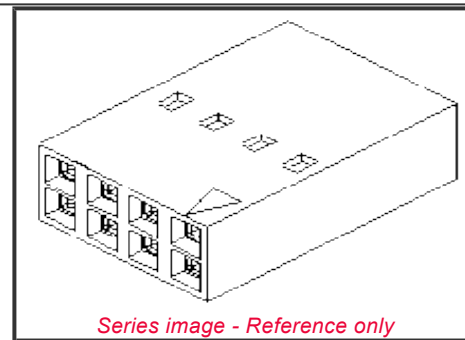

EU RoHS
ELV and RoHS
Compliant

REACH SVHC
Not Reviewed

Halogen-Free
Status
Not Halogen-Free



Need more information on product environmental compliance?Email productcompliance@molex.comFor a multiple part number RoHS Certificate of Compliance, [click here](#)Please visit the [Contact Us](#) section for any non-product compliance questions.**Search Parts in this Series**[70450Series](#)**Mates With**[8624](#), [70203](#), [70029](#), [70567](#), [70568](#), [71308](#), [71349](#), [70287](#), [70227](#), [70280](#), [70260](#), [8723](#), [8724](#), [70204](#)**Use With**[70058](#), [71851](#)[Product Specification PS-70400 \(PDF\)](#) [3D Mo](#)**Order Products:****Part Detail:** ([show all](#))[General](#)[Physical](#)[Agency Certification](#)[Material Info](#)[Reference - Drawing Numbers](#)**General**

Product Family	Crimp Housings
Series	70450
Comments	Version A
Overview	C-Grid® / SL™ Products
Product Name	SL™

Physical

Breakaway	No
Circuits (maximum)	10
Color - Resin	Black
Flammability	94V-0
Gender	Female
Glow-Wire Compliant	No
Material - Resin	Polyester
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Stackable	Yes
Temperature Range - Operating	-40°C to +105°C

Agency Certification

CSA	LR19980
UL	E29179

Material Info

Old Part Number	70450-0004
-----------------	------------

Reference - Drawing Numbers

Product Specification	PS-70058, PS-70400
Sales Drawing	SD-70450-0001-0026