

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0431604303**
Status: **Active**
Overview: Sabre™ Power Connector
Description: 7.50mm Pitch Sabre™ Header, Vertical, 3 Circuits, Glow Wire Compatible, PCB Thickness 2.40mm, with Board Lock

Documents:

[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-44441-9999 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)
[Product Literature \(PDF\)](#)

Agency Certification

CSA LR19980
TUV R72130381
UL E29179


General

Product Family PCB Headers
Series 43160
Application Power, Wire-to-Board
Comments "Fully Polarized, high power wire to board and wire to wire connector system<P><P>This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options."

Overview [Sabre™ Power Connector](#)
Product Literature Order No 987650-5662
Product Name Sabre™
UPC 800754255226

Physical

Breakaway No
Circuits (Loaded) 3
Circuits (maximum) 3
Color - Resin Black
Durability (mating cycles max) 25
First Mate / Last Break No
Flammability 94V-0
Glow-Wire Compliant Yes
Guide to Mating Part No
Keying to Mating Part Yes
Lock to Mating Part Yes

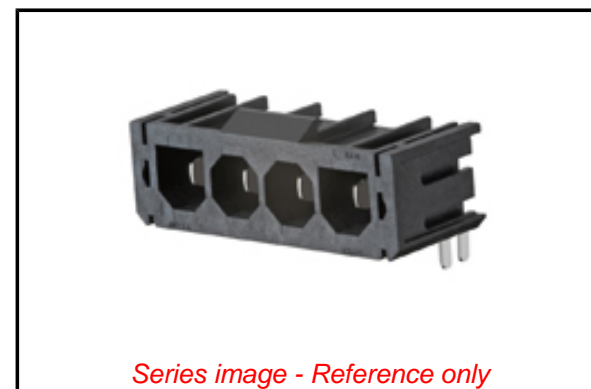

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Contains SVHC(2015 June 15): No

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS
ELV

Green Image
Not Relevant

Search Parts in this Series

[43160 Series](#)

Mates With

[44441-2003 Sabre™ Receptacle Housing](#)

Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	4.125/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	5.33mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.40mm
Packaging Type	Tray
Pitch - Mating Interface	7.50mm
Pitch - Termination Interface	7.50mm
Plating min - Mating	0.889µm
Plating min - Termination	0.889µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +75°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	18.0A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235

Material Info

Reference - Drawing Numbers

Product Specification	PS-44441-9999
Sales Drawing	SDA-43160-****

This document was generated on 11/04/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION