

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0444412003**
Status: **Active**
Description: 7.50mm (.295") Pitch Sabre™ Receptacle Housing, Single Row, PA Polyamide Nylon 6/6, UL 94V-0, 3 Circuits, Glow Wire Compatible

Documents:

[3D Model](#) [Product Specification PSX-44441-9999 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Literature \(PDF\)](#)

General

Product Family Crimp Housings
Series 44441
Comments Glow Wire Equivalent Part Number 444412003 . Meets UL 1950 finger proof standard when mated to 43680-2003 plug loaded with 43178-5002 or 43178-6002 male terminals or when mated to a 46007 series 3 circuit, UL 94V-0 right angle header.
Product Name Sabre™

Physical

Circuits (maximum) 3
Color - Resin Black
Flammability 94V-0
Gender Female
Glow-Wire Compliant Yes
Lock to Mating Part Yes
Material - Resin Nylon
Number of Rows 1
Packaging Type Bag
Panel Mount No
Pitch - Mating Interface (in) 0.295 In
Pitch - Mating Interface (mm) 7.50 mm
Polarized to Mating Part Yes
Stackable No
Temperature Range - Operating -40°C to +75°C


Electrical

CSA LR19980
Current - Maximum 18A
UL E29179

Material Info

Reference - Drawing Numbers

Product Specification PSX-44441-9999
Sales Drawing SD-44441-*003

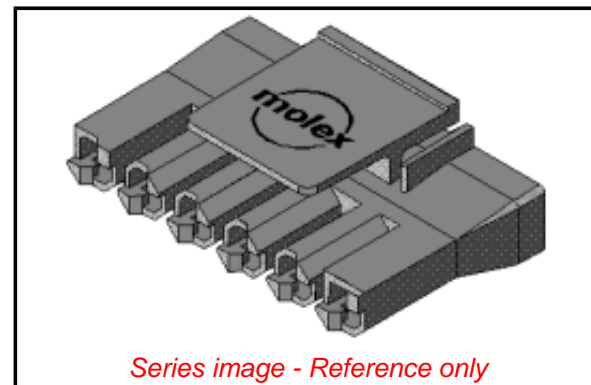

EU RoHS

ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free Status
Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

44441 Series

Mates With

43680-2003 Plug Housing. 43160 3 Circuit, UL 94V-0 Vertical or Right Angle Headers. 46007 3 Circuit, UL 94V-0 Right Angle, UL 1950 Finger Proof Safe Headers

Use With

43375 Female Crimp Terminals