

[Molex.com](http://Molex.com)

English  
日本語  
한국어  
简体中文

[Register](#) | [Login](#)  
[My Parts](#) ( 0 items )

Search site: Search:  [Go](#)

- Product Name**
- Cross-Ref**
- Catalog**
- Literature**
- Industries**
- Standards**
- Contact Us**
- About Us**
- Investors**
- Careers**

- [Connectors](#)
- [Sockets](#)
- [I/O Connectors](#)
- [Cable Assemblies](#)
- [Fiber Optics](#)
- [Printed Circuit Products](#)
- [Industrial Products](#)
- [Lighting Products](#)

**Switch Language**

- [Home](#)
- [Crimp Housings](#)
- [Datasheet](#)

**Need Assistance?**

- [Contact Us](#)
- [Find a Distributor](#)
- [Order Samples](#)
- [Tech Library](#)
- [Ecocare](#)
- [Electrical Models](#)

[Printer-friendly page](#)

[Email this page](#)

**Part Number:**

**0444412004**

**Status:**

**Active**


**Description:**

7.50mm (.295") Pitch Sabre™ Receptacle Housing, Single Row, PA Polyamide Nylon 6/6, UL 94V-0, 4 Circuits, Glow Wire Compatible

**Documents:** *Note - Please disable browser pop-up blockers for documents on www.molex.com*

[Drawing \(PDF\)](#)

[Product Specification PSX-44441-9999 \(PDF\)](#)

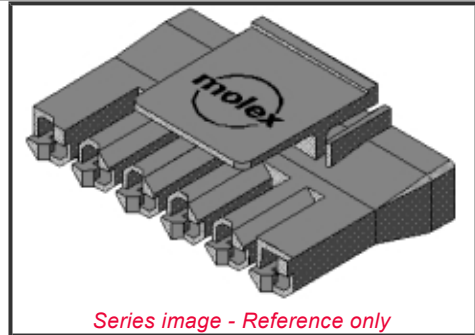

**EU RoHS**  
ELV and RoHS  
Compliant

**REACH SVHC**  
Contains SVHC: No

**Halogen-Free**  
Status  
Halogen-Free

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[44441](#)Series

**Mates With**

[436802004](#) Plug Housing  
[43160](#) 4 Circuit, UL 94V0 Vertical or Right Angle Headers  
[46007](#) 4 Circuit, UL 94V0 Right Angle, UL 1950 Finger Proof Safe Headers

**Use With**

[43375](#) Female Crimp Terminals

[Product Literature \(PDF\)](#)

**Order Products:**

Part Detail: ([show all](#))

[General](#)[Physical](#)[Electrical](#)[Agency Certification](#)[Material Info](#)[Reference - Drawing Numbers](#)

**General**

Product Family	Crimp Housings
Series	<u>44441</u>
Comments	Meets UL 1950 finger proof standard when mated to 43680-2004 plug loaded with 43178-5002 or 43178-6002 male terminals or when mated to a 46007 series 2 circuit, UL 94V-0 right angle header.
Product Literature Order No	USA-113
Product Name	Sabre™

**Physical**

Circuits (maximum)	4
Color - Resin	Black
Flammability	94V-0
Gender	Female
Glow-Wire Compliant	Yes
Lock to Mating Part	Yes
Material - Resin	Nylon
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.295 In
Pitch - Mating Interface (mm)	7.50 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +75°C

**Electrical**(Please review the Product Specification for specific details.)

Current - Maximum per Contact	18A
-------------------------------	-----

**Agency Certification**

CSA	LR19980
UL	E29179

**Material Info****Reference - Drawing Numbers**

Product Specification	PSX-44441-9999
Sales Drawing	SD-44441-2004

---

[Feedback](#)  
[Privacy](#)  
[Legal](#)  
[Site Map](#)  
[Help](#)

• [Find Us](#)  
•      
Copyright 2005-2010