

[Molex.com](#)

English
日本語
한국어
简体中文

[Register | Login](#)
[My Parts \(0 items \)](#)

Search site: Search: [Go](#)

- Product Name
- Cross-Ref
- Catalog
- Literature
- Industries
- Standards
- Contact Us
- About Us
- Investors
- Careers

- Connectors
- Sockets
- I/O Connectors
- Cable Assemblies
- Fiber Optics
- Printed Circuit Products
- Industrial Products
- Lighting Products

Switch Language

English

- [Home](#)
- [Crimp Housings](#)
- [Datasheet](#)

Need Assistance?

- Contact Us
- Find a Distributor
- Order Samples
- Tech Library
- Ecocare
- Electrical Models

[Printer-friendly page](#)

[Email this page](#)

Part Number:
0701070004


Status:
Active

Overview:
C-Grid® / SL™ Products

Description:
2.54mm (.100") Pitch SL™ Wire-to-Wire Crimp Housing, Single Row, Version A, without Mounting Ears, 5 Circuits

Documents: *Note - Please disable browser pop-up blockers for documents on www.molex.com*
[Drawing \(PDF\)](#) [Product Specification PS-70400 \(PDF\)](#)

[3D Model](#)

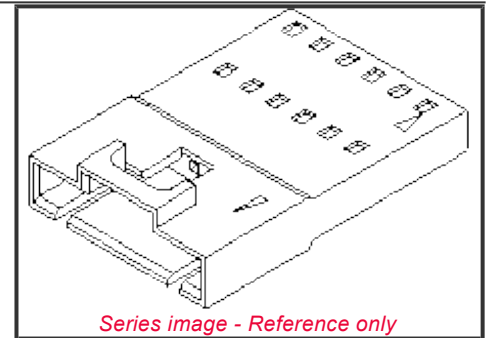

EU RoHS
ELV and RoHS
Compliant

REACH SVHC
Contains SVHC: No

Halogen-Free Status
Not Halogen-Free



Need more information on product environmental compliance?Email productcompliance@molex.comFor a multiple part number RoHS Certificate of Compliance, [click here](#)Please visit the [Contact Us](#) section for any non-product compliance questions.**Search Parts in this Series**[7010Z](#)Series**Mates With**[70400G](#)., [70066g](#) Housing, [70430g](#) Receptacle**Use With**[70021](#)**Order Products:****Part Detail: ([show all](#))**[General](#)[Physical](#)[Agency Certification](#)[Material Info](#)[Reference - Drawing Numbers](#)**General**

Product Family	Crimp Housings
Series	7010Z
Comments	Version A
Overview	C-Grid® / SL™ Products
Product Name	SL™

Physical

Circuits (maximum)	5
Color - Resin	Black
Flammability	94V-0
Gender	Female
Glow-Wire Compliant	No
Material - Resin	Polyester
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

Material Info**Reference - Drawing Numbers**

Product Specification	PS-70400
Sales Drawing	SD-70107-0001-0024