

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0912283002](#)
Status: **Active**
Overview: [ChipSIM Connectors and Cardholders](#)
Description: 2.54mm Pitch ChipSIM Connector with Ejector, 6 Circuits, with Pegs, Black Button

Documents:

[3D Model](#) [Test Summary STR-1244 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Packaging Specification PK-91228-002 \(PDF\)](#)

Agency Certification

UL E29179

General


Product Family Memory Card Sockets
 Series [91228](#)
 Component Type Receptacle (Card)
 Overview [ChipSIM Connectors and Cardholders](#)
 Product Name ChipSIM
 Style Push-Push
 Type N/A
 UPC 822350935104

Physical

Card Detection Switch Yes
 Circuits (Loaded) 6
 Circuits (maximum) 6
 Color - Resin Black
 Durability (mating cycles max) 5000
 Ejector Button Yes
 Ejector Button Side Left
 Entry Angle Vertical (Top Entry)
 Flammability 94V-0
 Keying to Mating Part Yes
 Material - Metal Phosphor Bronze, Piano wire, Stainless Steel
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 1.736/g
 PCB Locator Yes
 PCB Mounting Side Normal
 PCB Retention None
 Packaging Type Embossed Tape on Reel
 Pitch - Mating Interface 2.54mm, 7.32mm
 Pitch - Termination Interface 2.54mm, 7.32mm
 Plating min - Mating 0.102µm
 Plating min - Termination 3.048µm
 Ports 1
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating -40°C to +85°C
 Termination Interface: Style Surface Mount

Electrical

Current - Maximum per Contact 0.5A
 Shielded No
 Voltage - Maximum 50V DC
 Voltage Key N/A

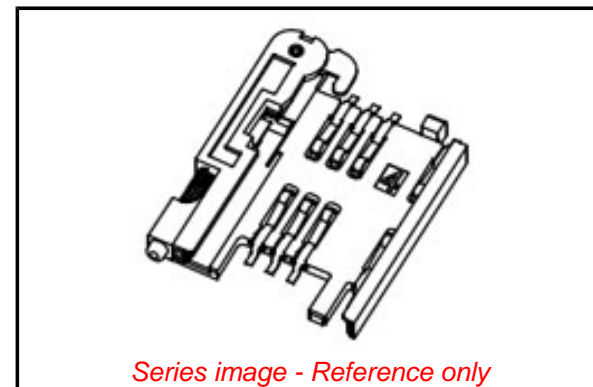

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

No -ED/39/2015 (15 June 2015)

Halogen-Free

Status

Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

Green Image

Not Relevant

Search Parts in this Series

[91228](#) Series

Use With

Card Holder [91236](#)

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-free Process Capability	REFLOW
Max. Cycles at Max. Process Temperature	002
Process Temperature max. C	240

Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-91228-002
Sales Drawing	SD-91228-001, SDA-91228-9001
Test Summary	STR-1244

This document was generated on 12/04/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION