

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0346950101](#)
Status: **Active**
Overview:
Description: 1.50mm (.059")/2.80mm (.110") Stac64™ Single Bay Power Vertical Header, 10 Circuits, Polarization B, Gray, Tube

Documents:


[3D Model](#) [Product Specification PS-31372-100 \(PDF\)](#)
[Application Specification \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

General

Product Family	PCB Headers
Series	34695
Application	Wire-to-Board
Comments	Polarization B
Overview	Stac64™ Single, Multi-Pocket and Hybrid Header System
Product Name	Stac64™

Physical

Breakaway	No
Circuits (Loaded)	10
Circuits (maximum)	10
Color - Resin	Gray
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Compliant	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Nickel
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Vertical
PC Tail Length (in)	0.131 In
PC Tail Length (mm)	3.33 mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness Recommended (in)	0.062 In
PCB Thickness Recommended (mm)	1.57 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.059 In
Pitch - Mating Interface (in)	0.110 In
Pitch - Mating Interface (mm)	1.50 mm
Pitch - Mating Interface (mm)	2.80 mm
Pitch - Term. Interface (in)	0.059 In
Pitch - Term. Interface (in)	0.110 In
Pitch - Term. Interface (mm)	1.50 mm
Pitch - Term. Interface (mm)	2.80 mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	N/A

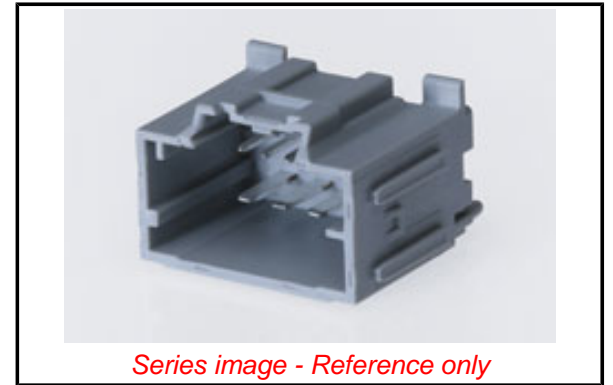

EU RoHS

ELV and RoHS Compliant
REACH SVHC
 Not Reviewed
Halogen-Free Status
 Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any non-product compliance questions.

Duration at Max.	40
Process Temperature (seconds)	
Lead-free Process Capability	SMC & Wave Capable (TH only)
Max. Cycles at Max.	3
Process Temperature	
Process Temperature max. C	260

Search Parts in this Series

[34695 Series](#)

Mates With

[31408](#) USCAR 2.54mm (.100") Pitch Receptacle, [31372](#) 5.25mm (.206") Pitch Hybrid Receptical Assembly

Temperature Range - Operating	-40°C to +100°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum	18A
Current - Maximum	30A
Voltage - Maximum	500V

Material Info

Reference - Drawing Numbers

Product Specification	PS-31372-100
Sales Drawing	SD-34695-100

This document was generated on 11/06/2009

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION