


THIRD ANGLE PROJECTION

ITEM CODE	RATED VOLTAGE	CAP. $\mu F$ ( * )	DIMENSIONS						MARKING STYLE
			L	T	H	F	G	d	
ECQE1564 () F	100VDC	0.56 (564)	12.0	5.5	10.9	10.0	1.0	0.6	1
" 1684 () F	"	0.68 (684)	"	6.0	11.9	"	"	"	"
" 1824 () F	"	0.82 (824)	"	"	13.5	"	"	"	"
" 1105 () F	"	1.0 (105)	"	6.7	14.0	"	"	"	"
" 1125 () F	"	1.2 (125)	18.5	5.5	12.8	15.0	"	"	2
" 1155 () F	"	1.5 (155)	"	6.0	13.4	"	"	0.8	"
" 1185 () F	"	1.8 (185)	"	6.5	14.4	"	"	"	"
" 1225 () F	"	2.2 (225)	"	7.0	15.0	"	"	"	"
" 1275 () F	"	2.7 (275)	"	8.0	15.8	"	"	"	"
" 1335 () F	"	3.3 (335)	"	8.5	16.5	"	"	"	"
" 1395 () F	"	3.9 (395)	26.0	7.0	16.4	22.5	"	"	"
" 1475 () F	"	4.7 (475)	"	7.5	17.0	"	"	"	"
" 1565 () F	"	5.6 (565)	"	8.3	17.5	"	"	"	"
" 1685 () F	"	6.8 (685)	"	9.0	18.5	"	"	"	"
" 1825 () F	"	8.2 (825)	"	10.0	20.0	"	1.5	"	"
" 1106 () F	"	10.0 (106)	"	11.5	21.0	"	"	"	"


TOL. SYMBOL (J or K)

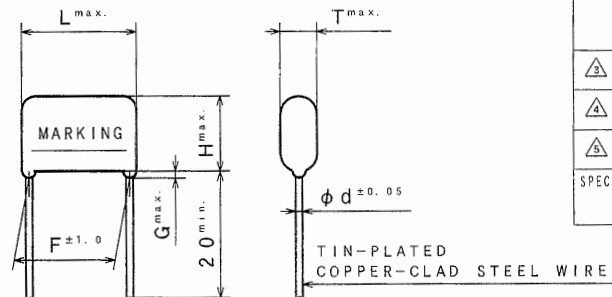

ALTERATION		
ISSUE	DESCRIPTION	DATE
⚠	Company name changed	Apr. 1 2006
⚠	Correction: category temperature range (-40°C~+85°C→-40°C~+105°C) Addition: rated voltage (Derating of rated voltage by 1.25%/°C at more than 85°C)	Jan. 22 2008
⚠	Company name changed Error correction	Apr. 1 2008
⚠	Company name changed	Apr. 1 2012
⚠	Company name changed	Apr. 1 2013

SPECIFICATIONS No. TEB7174H

ITEM CODE NUMBER STRUCTURE

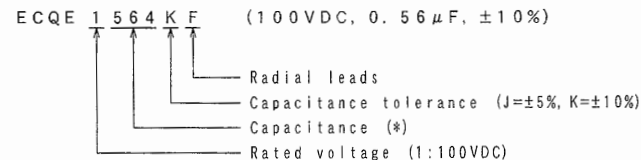

CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polyester film dielectric.  
The capacitor is enclosed in non-combustible epoxy resin and has two leads.


MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage, manufacturer's trademark (STYLE 2 only) and date code.

PROPERTIES

Capacitance : See table at 1kHz  
 Capacitance tolerance :  $\pm 5\%$  (J),  $\pm 10\%$  (K) at 1kHz  
 Rated voltage : 100VDC ⚠ (Derating of rated voltage by 1.25%/°C at more than 85°C)  
 Withstand voltage : 100VDC $\times 150\%$  for 60s  
 Insulation resistance :  $\geq 3000\Omega \cdot \mu F$  at 100VDC, 20°C for 60s  
 Dissipation factor :  $\leq 1.0\%$  at 1kHz, 20°C  
 Category temperature range : ⚠ From -40°C to +105°C (including temperature rise on unit surface)

MARKING EXAMPLE

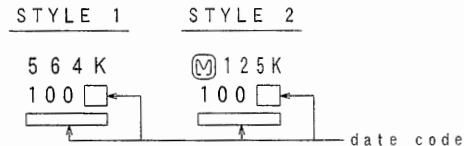

Reference

DESIGN	M. Mubada
CHECKED	K. Dasgupta
APPROVAL	K. Subramanian
ESTABLISHMENT	Dec. 5. 2005
TYPE NAME	
ECQE1*** () F	
NAME Metallized Polyester Film Capacitor	
DRAWING NAME	
PRODUCT DRAWING	
DRAWING No.	
5072M-J-E (1/1)	

Film Capacitor Division  
 Capacitor Business Division  
 Panasonic Corporation