

## THIRD ANGLE PROJECTION

ITEM CODE	CAPACITANCE μF (*)	DIMENSIONS			
		L	T	H	F
ECWF6103 0 L	0. 01 (103)	12. 5	5. 2	8. 0	10. 0
" 6113 0 L	0. 011 (113)	"	5. 4	8. 2	"
" 6123 0 L	0. 012 (123)	"	5. 5	8. 3	"
" 6133 0 L	0. 013 (133)	"	5. 6	8. 5	"
" 6153 0 L	0. 015 (153)	"	5. 9	8. 7	"
" 6163 0 L	0. 016 (163)	"	6. 0	8. 9	"
" 6183 0 L	0. 018 (183)	"	6. 2	9. 1	"
" 6203 0 L	0. 02 (203)	"	6. 5	9. 3	"
" 6223 0 L	0. 022 (223)	"	6. 2	9. 0	"
" 6243 0 L	0. 024 (243)	"	6. 4	9. 2	"
" 6273 0 L	0. 027 (273)	13. 0	6. 6	9. 5	0. 8
" 6303 0 L	0. 03 (303)	"	6. 9	9. 7	"
" 6333 0 L	0. 033 (333)	"	7. 1	10. 0	"
" 6363 0 L	0. 036 (363)	"	7. 3	10. 2	"
" 6393 0 L	0. 039 (393)	"	7. 6	10. 4	"
" 6433 0 L	0. 043 (433)	"	7. 9	10. 7	"
" 6473 0 L	0. 047 (473)	15. 5	6. 4	10. 8	12. 5
" 6513 0 L	0. 051 (513)	"	6. 6	11. 0	"
" 6563 0 L	0. 056 (563)	"	6. 8	11. 2	"
" 6623 0 L	0. 062 (623)	"	7. 1	11. 5	"
" 6683 0 L	0. 068 (683)	"	7. 4	11. 8	"
" 6753 0 L	0. 075 (753)	"	7. 7	12. 1	"
" 6823 0 L	0. 082 (823)	"	8. 0	12. 4	"
" 6913 0 L	0. 091 (913)	"	8. 3	12. 7	"
" 6104 0 L	0. 1 (104)	18. 0	7. 7	12. 1	15. 0
" 6114 0 L	0. 11 (114)	"	8. 0	12. 4	"
" 6124 0 L	0. 12 (124)	"	8. 3	12. 7	"
" 6134 0 L	0. 13 (134)	"	8. 5	13. 0	"
" 6154 0 L	0. 15 (154)	"	9. 1	13. 5	"
" 6164 0 L	0. 16 (164)	"	9. 3	13. 8	"
" 6184 0 L	0. 18 (184)	"	9. 8	14. 2	"
" 6204 0 L	0. 2 (204)	"	10. 3	14. 7	"
" 6224 0 L	0. 22 (224)	"	10. 8	15. 5	"
" 6244 0 L	0. 24 (244)	"	11. 2	15. 9	"

## ITEM CODE NUMBER STRUCTURE

ECWF 6105 JL (630VDC, 1. 0μF, ±5%)  
 Radial leads  
 Capacitance tolerance (H=±3%, J=±5%)  
 Capacitance: See table (\*)  
 Rated voltage (6=630VDC)

## CONSTRUCTION

The capacitor is of non-inductive construction, wound with metallized polypropylene film dielectric.

The capacitor is enclosed in non-combustible epoxy resin and has two leads.

## MARKING

Marking comprises capacitance, capacitance tolerance, rated voltage, manufacturer's trademark, type name "WFL" and manufacturer's date code.

## PROPERTIES

Capacitance : See table at 1kHz  
 Capacitance tolerance : ±3% (H), ±5% (J)  
 Rated voltage : 630VDC  
 Withstand voltage : Rated voltage × 150% for 60s  
 Insulation resistance : C≤0. 33μF : ≥9, 000MΩ      C>0. 33μF : ≥3, 000MΩ·μF } at 500VDC, 20°C for 60s

Dissipation factor : ≤0. 05% at 1kHz, 20°C  
 Category temperature range : From -40°C to +105°C  
 (including temperature rise on unit surface)

DO NOT SCALE DRAWING


REVISIONS INDICATED BY △

ALL DIMENSIONS ARE IN MILLIMETERS

## ALTERATION

ISSUE	DESCRIPTION	DATE
1	Company name changed	Oct. 1 2004
2	Company name changed	Apr. 1 2005
3	Company name changed	Apr. 1 2006
4	Company name changed	Apr. 1 2008
5	Company name changed	Apr. 1 2012
6	Company name changed	Apr. 1 2013

## SPECIFICATIONS No.

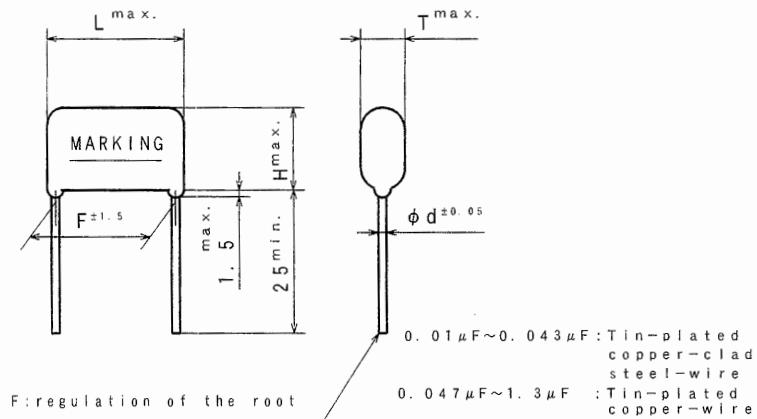

## (example)

(103~433)	(473~135)
WFL103J 630V date code	WFL473J 630V date code

\*The marking of 'WFL' with the underline means that the copper wire is used for the lead wire, while the one without the underline means that tinned copper clad-steel wire is used.

DESIGN	Th. Mihara
CHECKED	n. Kosuga
APPROVAL	K. Fukumoto
ESTABLISHMENT	Feb. 3. 2003
TYPE NAME	ECWF 6*** 0 L
NAME	METALLIZED POLYPROPYLENE CAPACITOR
DRAWING NAME	PRODUCT DRAWING
DRAWING NO.	3017J-J-E (1/1)

Film Capacitor Division  
 Capacitor Business Division  
 Panasonic Corporation