


Isolation Transformers For 10BASE-T

For Adapter Cards, MAUs, Hubs, and
Motherboard Applications

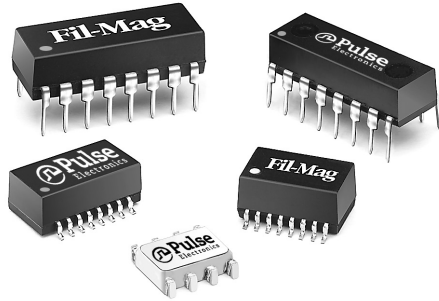

- Peak solder temperature ratings per table 5-2 in IPC/JEDEC J-STD-020
- Meets IEEE 802.3 specification
- Available with common mode chokes for EMI suppression
- Through hole, auto-insertable, 16-pin DIP package

Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

Part ² Number	Turns Ratio (±5%)		Primary Pins	Common Mode Choke	Sine Wave Inductance OCL (μ MIN)	Interwinding Capacitance C _{ww} ¹ (pF MAX)	Leakage Inductance L _l ¹ (μ MAX)	DCR (Ω MAX)	Hipot (Vrms)	Schem.	Mech
	Transmit	Receive									
Surface Mount ²										PAGES 6-7	PAGES 8-9
232467SMNL ⁶	1CT:2CT	1CT:2CT	6-8/1-3	✓	140	12	0.2	0.6	2000	T7	SMT5
E2023 ^{4, 6}	1CT:2.5CT	1CT:2CT	6-8/1-3	✓	200	15	0.5	0.4	2000	T10	SMT4
EX2024 ^{3, 6}	1CT:2.5CT	1CT:2CT	6-8/1-3	✓	350	30	0.8	0.6	2000	T10	SMT4
PE-65745	1CT:1.414CT	1CT:2CT	6-8/1-3	—	140	12	0.2	0.3	1500	T4	SMT4

Notes:

1. **OCL**, **C_{ww}** and **L_l** are measured at 20 mVrms, 100 kHz.
2. For Tape & Reel packaging, add the suffix "T" to the end of the part number when ordering, e.g. E2023T.
3. Part numbers denoted "EX" are extended temperature parts -40°C to 85°C, electrical specifications @ 25°C.
4. **MSL** = Moisture Sensitivity Level a=1 b=2 c=3 d=4
5. Not available in RoHS
6. Not for sale in U.S.




Isolation Transformers For 10BASE-T

For Adapter Cards, MAUs, Hubs, and
Motherboard Applications



Schematics

T4, T7, T10

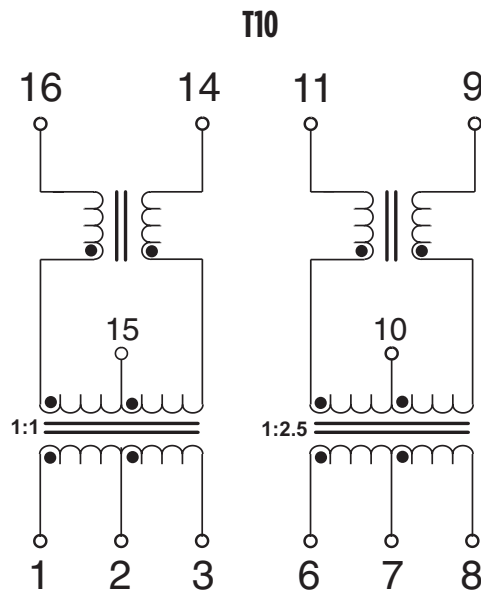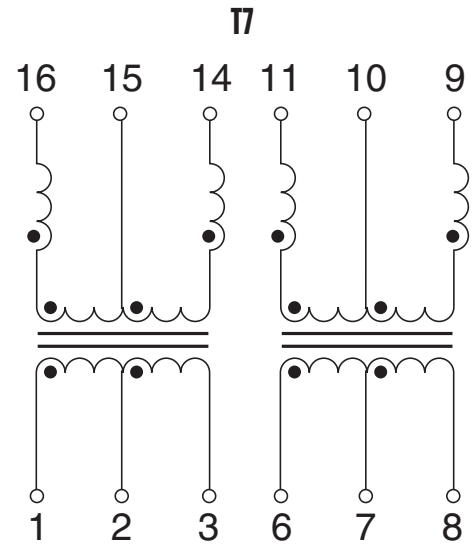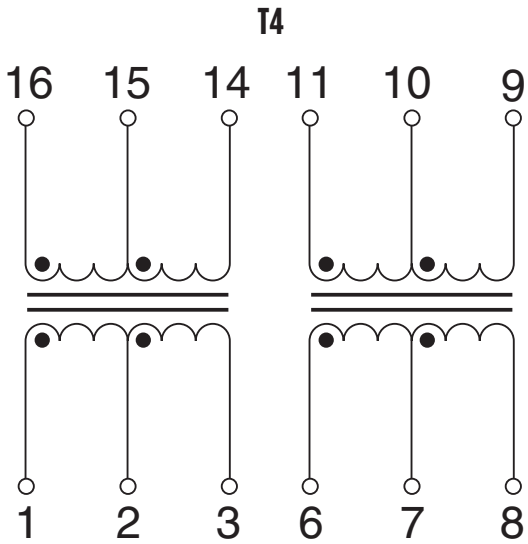

PINS 4, 5, 12 AND 13 NOT CONNECTED.


Isolation Transformers For 10BASE-T

For Adapter Cards, MAUs, Hubs, and
Motherboard Applications




Mechanical

SMT4

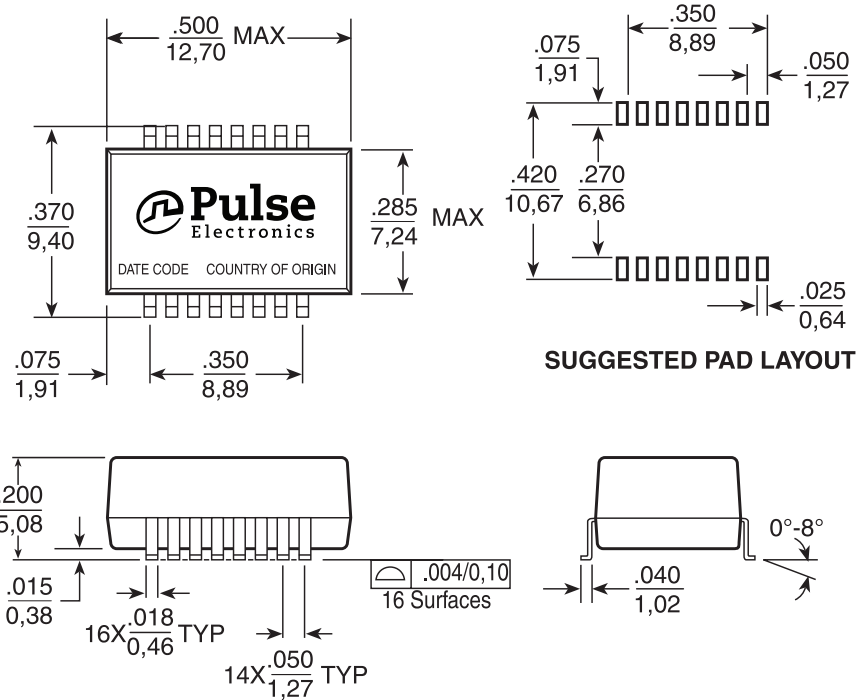

Mechanical

SMT5

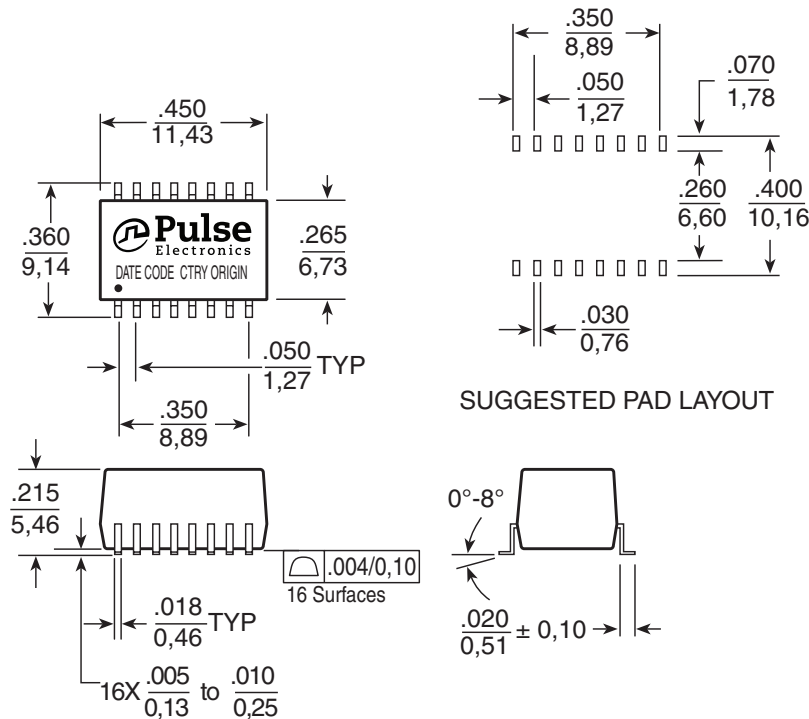

Isolation Transformers For 10BASE-T

*For Adapter Cards, MAUs, Hubs, and
Motherboard Applications*

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100

Pulse Europe

Einsteinstrasse 1
D-71083 Herren-
berg
Germany

Tel: 49 7032 7806

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technol-
ogy Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzen, PR China
518057

Pulse North China

Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823
(Pulse)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2011. Pulse Electronics, Inc. All rights reserved.