
REVISION DN

DO NOT

SCALE FROM

THIS PRINT


TABLE 2						
BODY SPE	CIFICATION					
ROW/OPTION	USE BODY					
-S, -S-NA/-NE	TSW-50-S					
-S-RA/-RE	TSW-50-S-RA					
-D, -D-NA/-NE	RTSW-50-D					
-D-RA	TSW-50-D-RA					
-T, -T-NA/-NE	TSW-50-T					
-T-RA, -Q-RA	TSW-50-T-RA					
-Q	TSW-50-T					

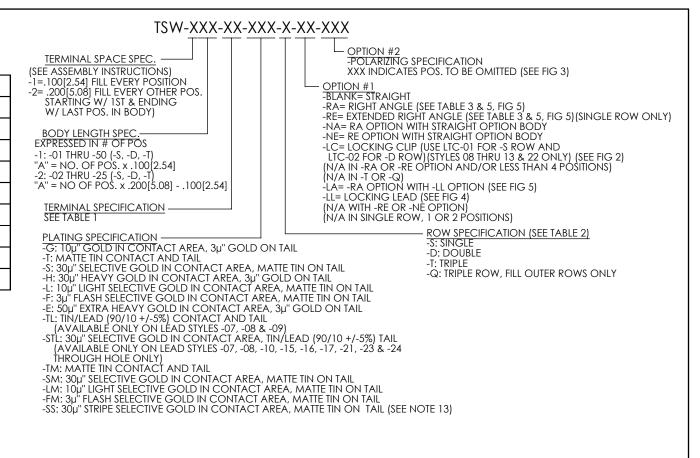


NOTES:

- 1. $\langle \overline{C} \rangle$ REPRESENTS CRITICAL DIMENSION.
- 2. MINIMUM TERMINAL PUSHOUT: 3 LBS.
- 3. MAXIMUM HEIGHT VARIATION: .005 [.13] (R.A. TAIL N/A).
- 4. ASSEMBLE GOLD PLATE END AS SHOWN.
- 5. STYLE -26: ROUND END TO APPEAR ON BOTTOM.
- 6. 'C'± .005[0.13] FOR STYLE -08, OPTION -LA & -RA ONLY.
- 7. TOW & SWAY SPEC. OF 2° APPLIES TO ALL POSITIONS. POST & TAIL. IN ALL DIRECTIONS
- 8. ALL DIMENSIONS TO BE ABOUT CL WITHIN ±.005 [.13]
- 9. MEASURE FROM THE BEND RADIUS OF THE TERMINALS .
- 10. TSW-50-D BODY CAN BE USED IF RTSW-50-D IS UNAVAILABLE
- 11. ORIENTATE PINS TO PREVENT BANDOLIER MARKS FROM SHOWING IN THE POST AREA. (SEE TABLE 7)
 - 12. MAXIMUM CUT FLASH: .020 [.50]
 - -SS OPTION ONLY AVAILABLE IN STRAIGHT LEAD STYLES -07, -08 & -09, -RA STYLE -08 ONLY. CAN ONLY MATE WITH SSW, SSQ, SSM, ESW, ESQ AND BCS.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: DECIMALS ANGLES .XX: ±.01 [.3] 2° .XXX: ±.005 [.13] .XXXX: ±.0020 [.051]	PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIA AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERED TO OTHER DO CUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.	520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code 55322				
MATERIAL: DO NOT SCALE BODIES: DUPONT PBT, UL 94 V TERMINALS: PHOS BRONZE		DESCRIPTION: .025[0.64] SQ. POST TERMINAL STRIP ASSEMBLY				
F-\DWG\MISC\MKTG\TSW-XXX-XX-XX-X		DWG, NO. TSW-XXX-XX-XX-XX-XX-XXX BY: KOLB 08/24/1988 SHEET 1 OF 6				

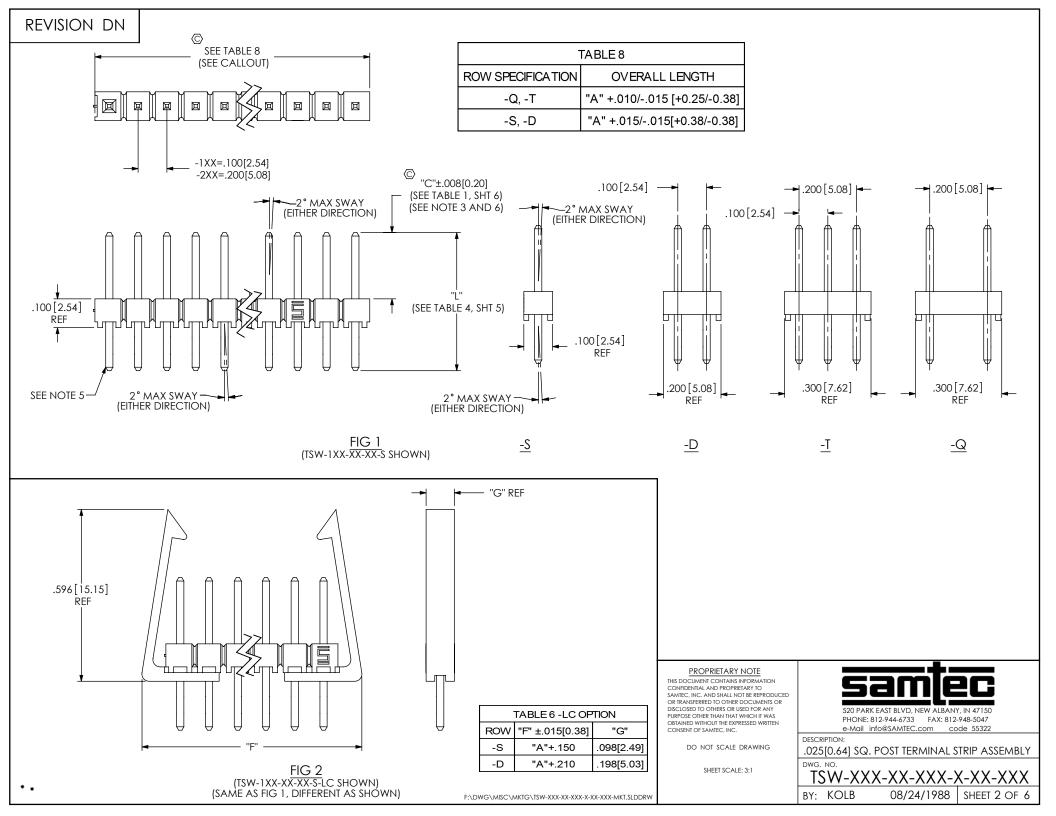

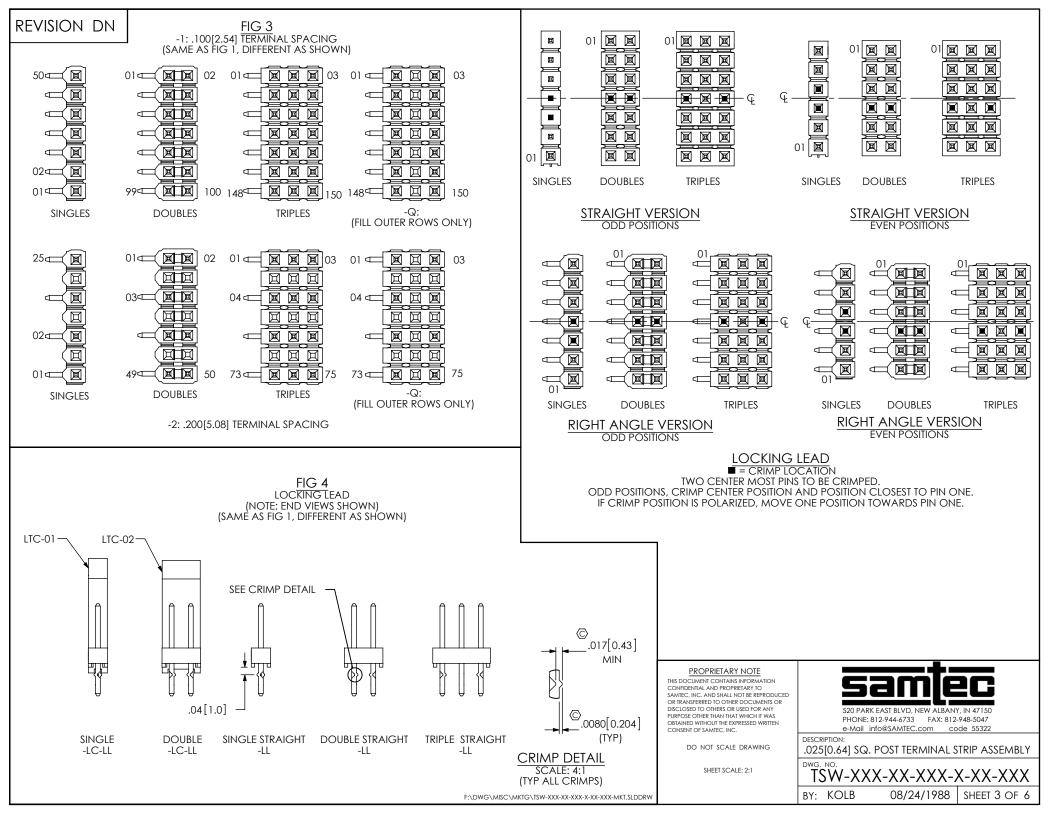

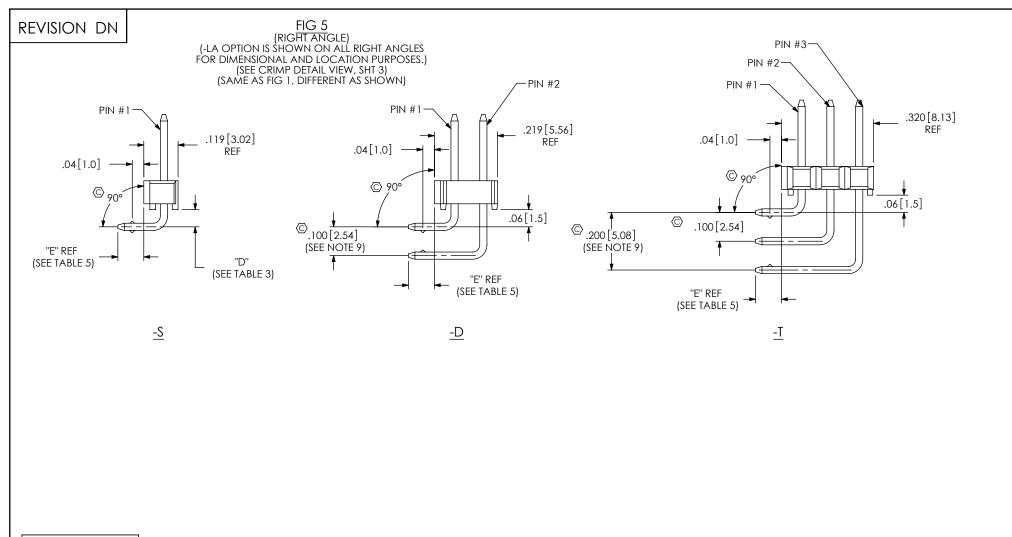


TABLE 3						
-XX	"D"					
-RA/-NA	.06[1.5]					
-RE/-NE	.16[4.1]					

				"	TABLE 5 "E				
	NA TRIPLE	NA DOUBLE	NE SINGLE	NA SINGLE	RA TRIPLE	RA DOUBLE	RE SINGLE	RA SINGLE	LEAD STYL
	.109 [2.77]	.109 [2.77]	N/A	.109 [2.77]	.090 [2.29]	.090 [2.29]	N/A	.090 [2.29]	08
	.309 [7.85]	.309 [7.85]	.209 [5.31]	.309 [7.85]	.290 [7.37]	.290 [7.37]	.190 [4.83]	.290 [7.37]	09
	.409 [10.39]	.409 [10.39]	.309 [7.85]	.409 [10.39]	.390 [9.91]	.390 [9.91]	.290 [7.37]	.390 [9.91]	10
٦r	.509 [12.93]	.509 [12.93]	.409 [10.39]	.509 [12.93]	.490 [12.45]	.490 [12.45]	.390 [9.91]	.490 [12.45]	11
	.609 [15.47]	.609 [15.47]	.509 [12.93]	.609 [15.47]	.590 [14.99]	.590 [14.99]	.490 [12.45]	.590 [14.99]	12
	N/A	.809 [20.55]	.709 [18.01]	.809 [20.55]	N/A	.790 [20.07]	.690 [17.53]	.790 [20.07]	13
	.219 [5.56]	.219 [5.56]	.119 [3.02]	.219 [5.56]	.200 [5.08]	.200 [5.08]	.100 [2.54]	.200 [5.08]	16
	N/A	N/A	.909 [23.09]	1.009 [25.63]	N/A	N/A	.890 [22.61]	.990 [25.15]	21
	.209 [5.31]	.209 [5.31]	.109 [2.77]	.209 [5.31]	.190 [4.83]	.190 [4.83]	.090 [2.29]	.190 [4.83]	22
	.119 [3.02]	.119 [3.02]	N/A	.119 [3.02]	.100 [2.54]	.100 [2.54]	N/A	.100 [2.54]	25
	N/A	N/A	.809 [20.55]	.909 [23.09]	N/A	N/A	.790 [20.07]	.890 [22.61]	27
	N/A	.709 [18.01]	.609 [15.47]	.709 [18.01]	N/A	.690 [17.53]	.590 [14.99]	.690 [17.53]	28
	N/A	N/A	N/A	.819 [20.80]	N/A	N/A	N/A	.800 [20.32]	29
	N/A	.619 [15.72]	N/A	.619 [15.72]	N/A	.600 [15.24]	N/A	.600 [15.24]	30

PROPRIETARY NOTE	
HIS DOCUMENT CONTAINS INFORMATION	
ONFIDENTIAL AND PROPRIETARY TO	
AMTEC, INC. AND SHALL NOT BE REPRODUCED	
OR TRANSFERRED TO OTHER DOCUMENTS OR	
ISCLOSED TO OTHERS OR USED FOR ANY	
URPOSE OTHER THAN THAT WHICH IT WAS	
BTAINED WITHOUT THE EXPRESSED WRITTEN	
ONSENT OF SAMTEC, INC.	L

DO NOT SCALE DRAWING

SHEET SCALE: 3:1




F:\DWG\MISC\MKTG\TSW-XXX-XXX-XXX-XXX-MKT.SLDDRW

REVISION DN


TABLE 7 (-T PLATING ONLY)								
	NUMBER OF BAND MARKS ALLOWED IN POST AREA				NUMBER OF BAND MARKS ALLOWED IN POST AREA			
LEAD STYLE	PIN #1	PIN #2	PIN #3	LEAD STYLE	PIN #1	PIN #2	PIN #3	
*-05	*0	N/A	N/A	*-17	2	N/A	N/A	
-06	1	N/A	N/A	*-18	2	N/A	N/A	
-07	1	N/A	N/A	*-19	2	N/A	N/A	
-08	0	0	0	*-20	2	N/A	N/A	
-08 RA	0	0	0	*-21	2	N/A	N/A	
-09	0	0	0	-21-RA	0	N/A	N/A	
-09 RA	0	0	0	-21-RE	0	N/A	N/A	
-09-RE	0	0	0	-22	0	0	0	
-10	0	0	0	-22-RA	0	0	0	
-10-RA	0	0	0	-22-RE	0	0	0	
-10-RE	0	0	0	-23	1	N/A	N/A	
-11	0	0	0	-24	1	N/A	N/A	
-11-RA	0	0	0	-25	1	1	1	
-11-RE	0	0	0	*-25-RA	1	0	0	
-12	0	0	0	*-26	1	N/A	N/A	
-12-RA	0	0	0	*-27	0	N/A	N/A	
-12-RE	0	0	0	*-27-RA	0	N/A	N/A	
-13	0	0	N/A	*-27-RE	0	N/A	N/A	
-13-RA	0	0	N/A	*-28	0	0	N/A	
-13-RE	0	0	N/A	*-28-RA	0	0	N/A	
-14	1	N/A	N/A	*-28-RE	0	0	N/A	
*-15	2	N/A	N/A	*-29	1	N/A	N/A	
*-16	1	1	1	*-29-RA	1	N/A	N/A	
*-16-RA	1	1	1	*-30	1	1	N/A	
*-16-RE	1	1	1	*-30-RA	1	1	N/A	

INS TO BE FLIPPED OPPOSITE OF SELECTIVE PLATING BEFORE BEING INSER



IN PROCESS 1 (SAME AS FIG. 1, DIFFERENT AS SHOWN) -T PLATING ONLY (SEE NOTE 11) (SEE TABLE 7)

TABLE 4						
PIN STYLE	"L" REF					
T-1S6-07-XXX-2	0.430 [10.92]					
T-1S6-08-XXX-2	0.530 [13.46]					
T-1S6-09-XXX-2	0.730 [18.54]					
T-1S6-10-XXX-2	0.830 [21.08]					
T-1S6-11-XXX-2	0.930 [23.62]					
T-1S6-12-XXX-2	1.030 [26.16]					
T-1S6-13-XXX-2	1.230 [31.24]					
T-1S6-14-XXX-2	1.430 [36.32]					
T-1S6-15-XXX-2	0.630 [16.00]					
T-1S6-16-XXX-2	0.445 [11.30]					
T-1S6-17-XXX-2	0.480 [12.19]					
T-1S6-18-XXX-2	0.300 [7.62]					
T-1S6-19-XXX-2	1.330 [33.78]					
T-1S6-20-XXX-2	1.130 [28.70]					
T-1S6-21-XXX-2	0.335 [8.51]					
T-1RS7-01-XXX-2	0.456 [11.58]					

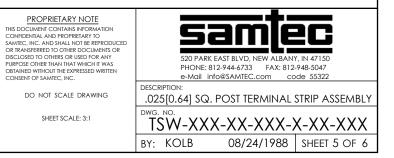

REVISION DN

TABLE 1								
TERMINAL SPECIFICATIONS								
TERMINAL SPEC PIN #1 PIN #2 PIN #3 "C"								
-05 (3)	T-1S6-21-XXX-2	N/A	N/A	0.105 [2.67]	(5)			
-06 (3)	T-1S6-18-XXX-2	N/A	N/A	0.105 [2.67]	(5)			
-07 (3)	T-1S6-07-XXX-2	N/A	N/A	0.230 [5.84]	(5)			
-08 (4)	T-1S6-08-XXX-2	T-1S6-09-XXX-2	T-1S6-11-XXX-2	(7)0.230 [5.84]	(5)(6)			
-09	T-1S6-09-XXX-2	T-1S6-11-XXX-2	T-1S6-20-XXX-2	0.230 [5.84]	(6)			
-10	T-1S6-10-XXX-2	T-1S6-12-XXX-2	T-1S6-13-XXX-2	0.230 [5.84]				
-11	T-1S6-11-XXX-2	T-1S6-20-XXX-2	T-1S6-19-XXX-2	0.230 [5.84]				
-12	T-1S6-12-XXX-2	T-1S6-13-XXX-2	T-1S6-14-XXX-2	0.230 [5.84]				
-13	T-1S6-13-XXX-2	T-1S6-14-XXX-2	N/A	0.230 [5.84]				
-14(3)	T-1S6-08-XXX-2	N/A	N/A	0.320 [8.13]	(5)			
-15 (3)	T-1S6-09-XXX-2	N/A	N/A	0.520 [13.21]	(5)			
-16	T-1S6-09-XXX-2	T-1S6-11-XXX-2	T-1S6-20-XXX-2	0.320 [8.13]	(5)(6)			
-17 (3)	T-1S6-10-XXX-2	N/A	N/A	0.620 [15.75]	(5)			
-18 (3)	T-1S6-11-XXX-2	N/A	N/A	0.720 [18.29]	(5)			
-19 (3)	T-1S6-12-XXX-2	N/A	N/A	0.820 [20.83]	(5)			
-20 (3)	T-1S6-13-XXX-2	N/A	N/A	1.020 [25.91]	(5)			
-21 (8)	T-1S6-14-XXX-2	N/A	N/A	1.220 [30.99]	(5)			
-21 (1)	T-1S6-14-XXX-2	N/A	N/A	0.230 [5.84]	(5)			
-22	T-1S6-15-XXX-2	T-1S6-10-XXX-2	T-1S6-12-XXX-2	0.230 [5.84]	(5)(6)			
-23 (3)	T-1S6-16-XXX-2	N/A	N/A	0.230 [5.84]	(5)			
-24 (3)	T-1S6-17-XXX-2	N/A	N/A	0.265 [6.73]	(5)			
-25 (4)	T-1S6-15-XXX-2	T-1S6-10-XXX-2	T-1S6-12-XXX-2	0.320 [8.13]	(5)(6)			
*-26 (3)	T-1RS7-01-XXX-2	N/A	N/A	0.230 [5.84]				
-27	T-1S6-19-XXX-2	N/A	N/A	0.230 [5.84]				
-28	T-1S6-20-XXX-2	T-1S6-19-XXX-2	N/A	0.230 [5.84]				
-29(4)	T-1S6-19-XXX-2	N/A	N/A	0.320 [8.13]				
-30 (4)	T-1S6-20-XXX-2	T-1S6-19-XXX-2	N/A	0.320 [8.13]				




FIG 6 (-26 LEAD STYLE) (SAME AS FIG. 1, DIFFERENT AS SHOWN)

(1) .230[5.84] POST FOR -RA OR -RE OPTION (2) OMIT WITH -Q ROW SPECIFICATION (SEE FIG. 6)

(5) AVAILABLE IN -LL OPTION

 (1) 230[3.3]
 (3) NOT AVAILABLE IN -RA OR -RE OPTION
 (6) AVAILABLE IN -LA OPTION

 (3) NOT AVAILABLE IN -RA OR -RE OPTION
 (6) AVAILABLE IN -LA OPTION

 (4) NOT AVAILABLE IN -RE OPTION
 (7) ON STYLE -08 -LA, RA: "C" = .230[5.84]±.008[0.20]

 (4) NOT AVAILABLE IN -RE OPTION
 (8) 1.220[30.99] POST FOR STRAIGHT PIN VERSION

 * SQUARE END OF PIN (T-1RS7-01-XXX-2 SHOULD BE LOCATED AT "C" DIMENSION DURING FILL PROCESS.

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC, AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1

