


1-1318772-3 Product Details

Share | Print | Email

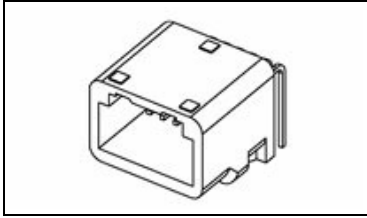

1-1318772-3

TE Internal Number: 1-1318772-3

Active

View 3D PDF

0.025 Series and Hybrid Connectors and Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Product Series = 025
- Wire-to-Board
- Applies To Printed Circuit Board
- Connector
- Connector Assembly

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [025 SERIES 12 POSITION\(PCB H-TYPE\) CAP HOUSING ASSEMBLY \(PDF, English\)](#)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- [.025 IDC Connectors \(1\) \(PDF, Japanese\)](#)
- [.025 IDC Connectors \(2\) \(PDF, Japanese\)](#)
- [025 SERIES I/O CONNECTORS \(H-Type V-Type 2Row, W... \(1\) \(PDF, Japanese\)](#)
- [025 SERIES I/O CONNECTORS \(H-Type V-Type 2Row, W... \(2\) \(PDF, Japanese\)](#)
- [0.64III SERIES CONNECTOR 2ROW \(1\) \(PDF, Japanese\)](#)
- [0.64III SERIES CONNECTOR 2ROW \(2\) \(PDF, Japanese\)](#)

Application Specifications:

- [Crimping of 025 Receptacle Contact \(PDF, Japanese\)](#)

Instruction Sheets:

- [025 SERIES I/O CONNECTORS \(H-Type, V-Type 2Row\) \(1\) \(PDF, Japanese\)](#)
- [025 SERIES I/O CONNECTORS \(H-Type, V-Type 2Row\) \(2\) \(PDF, Japanese\)](#)

CAD Files: (CAD Format & Compression Information)

- [2D Drawing \(DXF, Version H\)](#)
- [3D Model \(IGES, Version H\)](#)
- [3D Model \(STEP, Version H\)](#)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Series = 025
- [Product Type](#) = Connector
- Connector Type = Connector Assembly
- [PCB Mounting Orientation](#) = Right Angle
- PCB Mount Retention = With
- PCB Mount Retention Type = Tapping Screw
- Sealed = No
- PCB Mount Alignment = With
- PCB Mount Alignment Type = Mounting Holes

Mechanical Attachment:

- Contact Retention = Without
- Mating Retention Type = Latching
- Panel Mount Retention = Without

Electrical Characteristics:

- Operating Voltage Reference = DC
- Operating Voltage (VDC) = 12

Termination Features:

- Termination Method to Wire/Cable = Solder

Housing Features:

- Connector Style = Receptacle
- Centerline (mm [in]) = 2.20 [0.087]
- [Housing Material](#) = SPS - GF17
- [Housing Color](#) = Natural
- Mating Alignment = With
- Mating Alignment Type = Polarization

Configuration Features:

- [Number of Positions](#) = 12
- Number of Rows = 2
- Strain Relief = Without
- GET 0.64 Connector System = No

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Environmental:

- Operating Temperature (°C [°F]) = -30 - +105 [-22 - +221]

- Termination Method to PC Board = Through Hole - Solder

Dimensions:

- Tab Width (mm [in]) = 0.64 [0.025]
- Tail Length (mm [in]) = 4 [0.157]
- PCB Thickness, Recommended (mm [in]) = 1.20 [0.048], 1.60 [0.063]
- Length (X-Axis) (mm [in]) = 18.40 [0.7244]
- Width (Z-Axis) (mm [in]) = 18.60 [0.73228]
- Profile Height (Y-Axis) (mm [in]) = 15.50 [0.6102]

Body Features:

- Mating Retention = With

Contact Features:

- Contact Type = Tab
- Multiple Contact Types = Without
- Contact Base Material = Brass
- [Contact Mating Area Plating \(Signal\)](#) = Selective Tin
- Contact Plating, Termination Area, Material = Selective Tin
- Contact Plating, Termination Area, Thickness (μm [μin]) = 2.5 [98.42]
- Underplate Material = Nickel
- Underplate Material Thickness (μm [μin]) = 0.80 – 1.50 [31.496 – 59.055]
- Shunts/Shorting Bars = Without

Conditions for Usage:

- [Applies To](#) = Printed Circuit Board
- For Use With = Plug: 1318774, 1376675, 1717106 or 1746872

Operation/Application:

- Application Use = Wire-to-Board
- Contact Transmits (Typical Application) = Signal (Data)

Packaging Features:

- Packaging Method = Box/Carton, Tube
- Packaging Quantity = 23

Other:

- Brand = AMP

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [AODA Accessibility Policy](#)
- [AODA Multi-Year Accessibility Plan](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed