


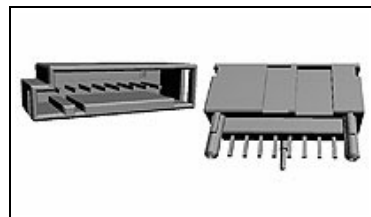

1-1743386-2 Product Details

[Share](#) [Print](#) [Email](#)


1-1743386-2

TE Internal Number: 1-1743386-2

Active

[View 3D PDF](#)

Micro-Power & Power Quadlok System

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Applies To Printed Circuit Board
- Connector
- Connector Assembly
- Connector Style = Header
- 8 Positions

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [MQS PIN HEADER ASS'Y 8POS \(V-TYPE\) \(PDF, English\)](#)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- [2D Drawing \(DXF, Version A1\)](#)
- [3D Model \(IGES, Version A1\)](#)
- [3D Model \(STEP, Version A1\)](#)

[List all Documents](#)

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

Feedback

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Connector
- Connector Type = Connector Assembly
- Sealed = No
- PCB Mount Alignment = With
- Mount Angle = Vertical
- Post Type = Solder Tail
- Keyed = Yes

Termination Features:

- Termination Method to PC Board = Through Hole - Solder

Contact Features:

- Contact Type = Tab
- Contact Style = MQS
- [Tab Contacts](#) = Without
- Number of MQS Contacts = 8
- [Contact Finish](#) = Tin
- Contact Shape = Square
- Contact Base Material = Phosphor Bronze

Housing Features:

- Connector Style = Header
- Centerline (mm [in]) = 2.54 [0.100]
- Header Color = Black

Configuration Features:

- [Number of Positions](#) = 8

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 260°C, Wave solder capable to 240°C, Wave solder capable to 265°C
- [RoHS/ELV Compliance History](#) = Always was RoHS compliant

Identification Marking:

- Key ID = B

Conditions for Usage:

- Applies To = Printed Circuit Board

Packaging Features:

- [Packaging Method](#) = Loose Piece

Other:

- Brand = TE Connectivity

Corporate Information

[About TE](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)
[Terms & Conditions](#)
[Privacy Policy](#)
[AODA Accessibility Policy](#)
[AODA Multi-Year Accessibility Plan](#)

Quick Links

[Distributor Inventory](#)
[Product Cross Reference](#)
[Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Knowledge Base](#)
[Manage Your Account](#)

Keep Me Informed

