




1318917-1 Product Details

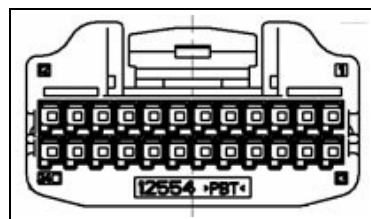

1318917-1

0.025 Series and Hybrid Connectors and Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Product Series = 025
- Wire-to-Wire
- Applies To Wire/Cable
- Connector
- Housing

[View all Features](#)

TE Internal Number: 1318917-1

Active

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Series = 025
- [Product Type](#) = Connector
- Connector Type = Housing
- Sealed = No
- Wire/Cable Type = Discrete Wire

Mechanical Attachment:

- Contact Retention = With
- Contact Retention Type = Retainer
- Mating Retention Type = Latching
- Panel Mount Retention = Without

Electrical Characteristics:

- Operating Voltage Reference = DC
- Operating Voltage (VDC) = 12

Termination Features:

- Termination Method to Wire/Cable = Crimp

Dimensions:

- Length (X-Axis) (mm [in]) = 21.00 [0.8268]
- Width (Z-Axis) (mm [in]) = 28.60 [1.126]
- Profile Height (Y-Axis) (mm [in]) = 15.80 [0.622]

Body Features:

- Mating Retention = With
- Wire Type = Stranded

Contact Features:

- Contact Type = Receptacle
- Multiple Contact Types = Without
- Shunts/Shorting Bars = Without

Housing Features:

- Connector Style = Plug
- Centerline (mm [in]) = 2.20 [0.087]
- [Housing Material](#) = PBT - GF
- [Housing Color](#) = Natural
- Mating Alignment = With
- Mating Alignment Type = Polarization

Configuration Features:

- [Number of Positions](#) = 24
- Number of Rows = 2
- Strain Relief = Without
- GET 0.64 Connector System = No

Industry Standards:

- Automotive Cable Standards (Signal) = AVSS/CAVUS/AVSSH-f, CAVS
- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Environmental:

- Operating Temperature (°C [°F]) = -30 - +105 [-22 - +221]

Conditions for Usage:

- [Applies To](#) = Wire/Cable
- For Use With = Mate With (1318853-1)

Operation/Application:

- Application Use = Wire-to-Wire
- Contact Transmits (Typical Application) = Signal (Data)

Packaging Features:

- Packaging Method = Plastic Bag, Paper Box
- Packaging Quantity = 100

Other:

- Brand = AMP
- Comment = Applied Contacts 025 Signal: 1123343-1

Corporate Information

[About TE](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)
[Terms & Conditions](#)
[Privacy Policy](#)
[AODA Accessibility Policy](#)
[AODA Multi-Year Accessibility Plan](#)

Quick Links

[Distributor Inventory](#)
[Product Cross Reference](#)
[Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Knowledge Base](#)
[Manage Your Account](#)

Keep Me Informed