




1375819-2 Product Details

[Share](#) [Print](#) [Email](#)

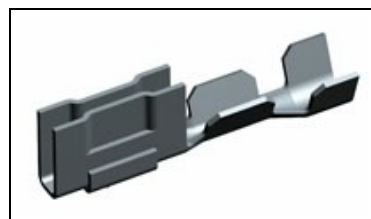

1375819-2

MTA, CST, CST-100 II and SL Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- CST Product Line
- Applies To Wire/Cable
- Contact Type = Socket
- Contact Configuration = Standard
- Contact - Rated Current = 4 A

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 1375819-2

Active

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Line = CST
- Wire/Cable Type = Discrete Wire

Mechanical Attachment:

- Contact Retention Type = Locking Lance
- Contact Retention = With

Electrical Characteristics:

- Contact - Rated Current (A) = 4
- Operating Voltage Reference = AC
- Operating Voltage (VAC) = 250

Termination Features:

- Wire/Cable Size (mm²) = 0.13 - 0.33
- Wire/Cable Size (AWG) = 22 - 26
- [Termination Method to Wire/Cable](#) = Crimp

Body Features:

- Wire Type = Stranded

Contact Features:

- Contact Type = Socket
- Contact Configuration = Standard
- Contact Base Material = Phosphor Bronze
- Contact Plating, Mating Area, Material = Gold
- Contact Plating, Mating Area, Thickness (µm [µin]) = 0.38 [15]
- Underplate Material = Nickel
- Underplate Material Thickness (µm [µin]) = 1.27 [50.000]

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Environmental:

- Operating Temperature (°C [°F]) = -55 - +105 [-67 - +221]

Conditions for Usage:

- Applies To = Wire/Cable
- Accepts Wire Insulation Diameter, Range (mm [in]) = 0.89 - 1.65 [0.035 - 0.065]
- For Use With = CST-100 II Connectors

Packaging Features:

- Packaging Method = Reel
- Packaging Quantity = 5,500

Other:

- Brand = AMP
- Comment = Gold Flash over Palladium Nickel or Gold (30) over Nickel

Feedback

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [AODA Accessibility Policy](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed



