



DO NOT SCALE
DIMENSIONS IN mm

METRIC




NOTES:

- △ FOR USE ON STANDARD APPLICATORS. (RIGHT-LEFT FEED)
- △ FOR USE ON MINIATURE APPLICATORS. (LEFT-RIGHT FEED)
- △ FOR USE ON MINIATURE APPLICATORS, AMP O-MATOR APPLICATION. (LEFT-RIGHT FEED)

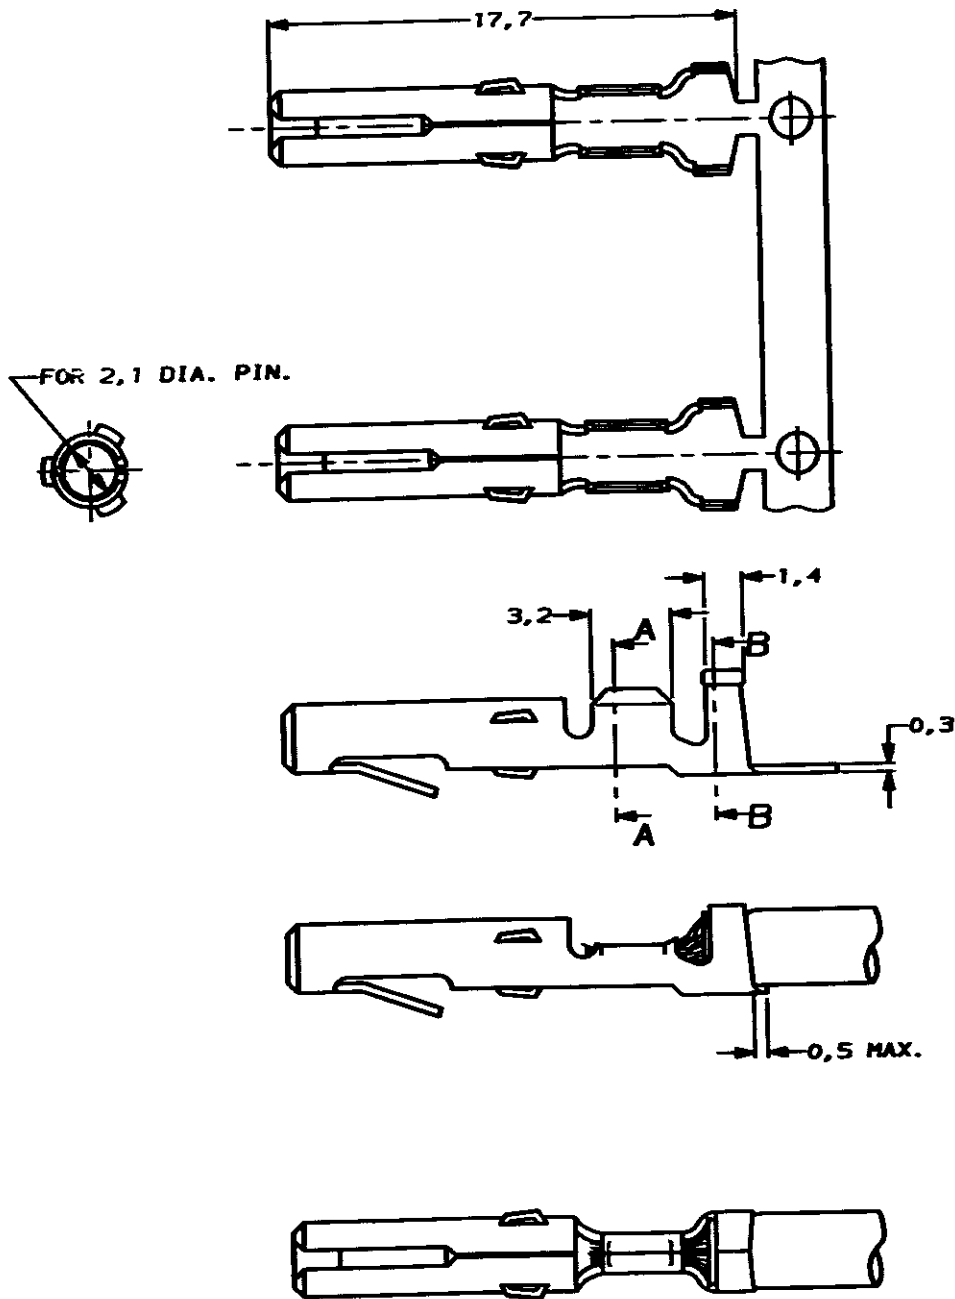

SECTION B-B



SECTION A-A

DOC. CENTRE
02 JULI 1992

WIRE RANGE :
0,5-1,0mm² AWG
INSULATION RANGE :
1,8-3,3mm DIA.

PLATING	PLATING	MATERIAL	PARTNUMBER
SEL. GOLD		BRASS	8-163300-1
PRE-TINPLATED		BRASS	1-163300-5
PRE-TINPLATED		PHOSPHOR BR.	163300-8
UNPLATED		PHOSPHOR BR.	163300-7
PRE-TINPLATED		BRASS	163300-6
UNPLATED		BRASS	163300-5
PRE-TINPLATED		PHOSPHOR BR.	163300-4
UNPLATED		PHOSPHOR BR.	163300-3
PRE-TINPLATED		BRASS	163300-2
UNPLATED		BRASS	163300-1

CUSTOMER DRAWING				FOR REFERENCE ONLY WILL NOT BE UPDATED	
© COPYRIGHT 19- BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION					
AMP				AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.	
NAME SOCKET MATE-N-LOK.					
J	H-9701	JvdH	AB	13-04-92	
LTR.	REVISION RECORD	DR.	CHK.	DATE	
DR.	J.V.B.MELDER	CHK.	A.B.MEK	APP.	L.V.SEST.
DATE.	10-04-92	DATE.	-	DATE.	24-72
Dwg. No.			C-163300	REV. LTR.	J
SHEET			1 of 1	A3	