




# 179096-1 Product Details

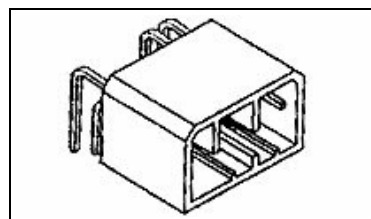

**179096-1**

TE Internal Number: 179096-1

Active

## MULTILOCK Connectors and Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

### Product Highlights:

- MULTILOCK Product Line
- Connector
- Wire-to-Board
- Connector Assembly
- Contact Type = Tab

[View all Features](#)

### Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

## Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

### Additional Information:

- [Product Line Information](#)

### Related Products:

- [Tooling](#)

## Product Features (Please use the Product Drawing for all design activity)

### Product Type Features:

- Product Line = MULTILOCK
- [Product Type](#) = Connector
- Connector Type = Connector Assembly
- [PCB Mounting Orientation](#) = Right Angle
- PCB Mount Retention = With
- PCB Mount Retention Type = Mounting Hole(s)
- Product Series = 070
- Sealed = No

### Mechanical Attachment:

- Mating Retention Type = Center Lock
- [Panel Mount Retention](#) = Without

### Electrical Characteristics:

- Contact - Rated Current (A) = 14

### Termination Features:

- Termination Method to PC Board = Through Hole - Solder

### Dimensions:

- PCB Thickness, Recommended (mm [in]) = 1.60 [0.063]
- Tail Length (mm [in]) = 4 [0.157]
- Length (X-Axis) (mm [in]) = 25.02 [0.985]
- Width (Z-Axis) (mm [in]) = 25.70 [1.011]
- Profile Height (Y-Axis) (mm [in]) = 19.80 [0.7795]

### Body Features:

- Mating Retention = With

### Contact Features:

- Contact Type = Tab
- Shunts/Shorting Bars = Without
- Multiple Contact Types = Without
- [Contact Base Material](#) = Brass
- [Contact Plating, Mating Area, Material](#) = Pre-Tin
- Contact Plating, Termination Area, Material = Pre-Tin

### Housing Features:

- Connector Style = Receptacle
- Centerline (mm [in]) = 3.50 [0.138]
- Mating Alignment = With
- Mating Alignment Type = Polarization
- [Housing Color](#) = White
- Housing Material = PBT - GF

### Configuration Features:

- [Number of Rows](#) = 2
- [Number of Positions](#) = 8
- GET 0.64 Connector System = No

### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C
- RoHS/ELV Compliance History = Always was RoHS compliant

### Environmental:

- Operating Temperature (°C [°F]) = -30 - +105 [-22 - +221]

### Conditions for Usage:

- [Applies To](#) = Printed Circuit Board

### Operation/Application:

- Application Use = Wire-to-Board
- Contact Transmits (Typical Application) = Signal (Data)

### Packaging Features:

- Packaging Method = Tube
- Packaging Quantity = 90

### Other:

- Brand = AMP
- Proprietary Name = MULTILOCK

Feedback

[News Room](#)

[Supplier Portal](#)

[Careers](#)

[Terms & Conditions](#)

[Privacy Policy](#)

[AODA Accessibility Policy](#)

[AODA Multi-Year Accessibility  
Plan](#)

[Documents & Drawings](#)

[Product Compliance Support Center](#)

[Site Map](#)

[Knowledge Base](#)

[Manage Your Account](#)

