


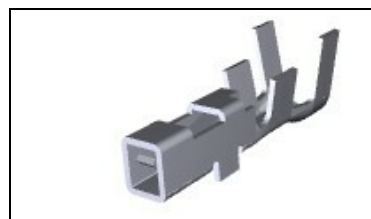

1827572-2 Product Details

[Share](#) [Print](#) [Email](#)


1827572-2

Dynamic Series Connectors

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Dynamic Series Product Line
- D-1 Series
- Series No. = 1000
- Wire-to-Wire
- Applies To Wire/Cable

[View all Features](#)

TE Internal Number: 1827572-2

Active

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Line = Dynamic Series
- Product Type = Contact
- [Insertion Force](#) = High
- Wire/Cable Type = Discrete Wire

Electrical Characteristics:

- Contact - Rated Current (A) = 5
- Operating Voltage Reference = AC/DC
- Operating Voltage (VAC) = 250
- Operating Voltage (VDC) = 250

Termination Features:

- Wire/Cable Size (mm²) = 0.34 - 0.86
- Wire/Cable Size (AWG) = 18 - 22
- Termination Method to Wire/Cable = Crimp

Body Features:

- Wire Type = Stranded

Contact Features:

- Contact Type = Socket
- Contact Base Material = Copper Alloy
- [Contact Plating, Mating Area, Material](#) = Gold
- Contact Plating, Mating Area, Thickness (µm [µin]) = 0.38 [15]
- Multiple Contact Types = Without
- Underplate Material = Nickel
- Underplate Material Thickness (µm [µin]) = 1.27 [50.000]

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Identification Marking:

- Wire Range Mark = 2L

Environmental:

- Operating Temperature (°C [°F]) = -55 - +105 [-67 - +221]

Conditions for Usage:

- [Applies To](#) = Wire/Cable
- For Use With = Tab Contact
- Accepts Wire Insulation Diameter, Range (mm [in]) = 1.40 - 2.21 [0.055 - 0.087]

Operation/Application:

- Application Use = Wire-to-Wire

Packaging Features:

- Packaging Method = Reel
- Packaging Quantity = 6,000

Other:

- Series = D-1
- Series No. = 1000
- Brand = TE Connectivity

Feedback

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [AODA Accessibility Policy](#)
- [AODA Multi-Year Accessibility Plan](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed



