


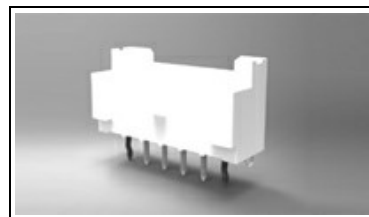

2132415-9 Product Details

[Share](#) [Print](#) [Email](#)


2132415-9

TE Internal Number: 2132415-9

Active

[View 3D PDF](#)

Economy Power Connectors

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Economy Power 2.5 Product Line
- Connector
- Wire-to-Board
- Applies To Printed Circuit Board
- 9 Positions

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [View Headers \(2\)](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [HEADER ASSEMBLY, VERTICAL, ECONOMY POWER, 2.5mm CENT...](#) (PDF, English)

Catalog Pages/Data Sheets:

- [7-1773458-5_ECONOMY_POWER_QRG](#) (PDF, English)
- [7-1773461-6_EP2.5_Connector_Series](#) (PDF, English)

Product Specifications:

- [EP 2.5 Connector System](#) (PDF, English)

Application Specifications:

- [Economy Power \(EP\) 2.5 Contacts and Receptacle Housing](#) (PDF, English)

Instruction Sheets:

- None Available

CAD Files: (CAD Format & Compression Information)

- [2D Drawing](#) (DXF, Version D)
- [3D Model](#) (IGES, Version D)
- [3D Model](#) (STEP, Version D)

Related Products:

- [Tooling](#)
- [Headers \(2\)](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Line = Economy Power 2.5
- Product Type = Connector
- Connector Type = Header
- PCB Mounting Orientation = Vertical
- PCB Mount Retention = Without
- PCB Mount Alignment = Without
- Sealed = No

Mechanical Attachment:

- Mating Retention Type = Latching

Electrical Characteristics:

- Contact - Rated Current (A) = 3
- Operating Voltage Reference = AC
- Operating Voltage (VAC) = 250

Termination Features:

- Termination Method to Wire/Cable = Solder
- Termination Method to PC Board = Through Hole - Solder

Dimensions:

- Mating Post Length (mm [in]) = 3.60 [0.142]
- PCB Thickness, Recommended (mm [in]) = 1.60 [0.063]
- Width (Z-Axis) (mm [in]) = 6.40 [0.252]
- Profile Height (Y-Axis) (mm [in]) = 8.80 [0.346]

Body Features:

Housing Features:

- Centerline (mm [in]) = 2.50 [0.098]
- Housing Color = Natural
- Housing Material = Nylon - GF
- Mating Alignment = With

Configuration Features:

- Number of Positions = 9
- Number of Rows = 1
- Tail Orientation = In-line

Industry Standards:

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant
- UL Rating = Recognized
- UL Flammability Rating = UL 94V-0
- CSA Certified = No

Conditions for Usage:

- Applies To = Printed Circuit Board
- Glow Wire Rating = Standard Part - Not Glow Wire

Operation/Application:

- Application Use = Wire-to-Board
- Contact Transmits (Typical Application) = Signal (Data)/Power

- Selectively Loaded = No
- Header Type = Shrouded
- Mating Retention = With

Packaging Features:

- Packaging Method = Bag, Box

Other:

- Brand = TE Connectivity

Contact Features:

- Contact Type = Pin
- Contact Plating, Termination Area, Material = Tin
- Contact Plating, Mating Area, Thickness (μm [μin]) = 2.03 [80]
- Contact Plating, Mating Area, Material = Tin
- Contact Design = Round Post
- Contact Base Material = Brass

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)
- [Terms & Conditions](#)
- [Privacy Policy](#)
- [AODA Accessibility Policy](#)
- [AODA Multi-Year Accessibility Plan](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed

