


2199230-2 Product Details

[Share](#) |
 [Print](#) |
 [Email](#)

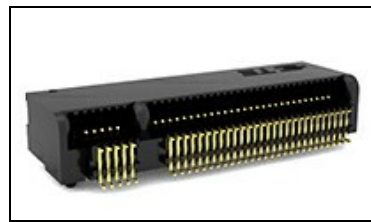

2199230-2

M.2 (NGFF) Sockets

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Socket
- PCB Mounting Orientation = Right Angle
- PCB Mount Style = Surface Mount
- Contact - Rated Current = .5 A
- AC Operating Voltage Reference

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 2199230-2

Active

[View 3D PDF](#)

[Add to My Part List](#) |
 [Request Sample](#) |
 [Find Similar Products](#) |
 [Buy Product](#)

Documentation & Additional Information	
<p>Product Drawings:</p> <ul style="list-style-type: none"> • M.2(NGFF) MINICARD 0.5PITCH 67POS 4.2H FOR DOUBLE SI... (PDF, English) <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • 1-1773706-1NGFF_QRG-SC (PDF, Chinese (Simplified)) • 1-1773702-1_NGFF_QRG-EN (PDF, English) <p>Product Specifications:</p> <ul style="list-style-type: none"> • Product Specification for M.2(NGFF) Lower End Applic... (PDF, English) <p>Application Specifications:</p> <ul style="list-style-type: none"> • APPLICATION SPEC FOR M.2(NGFF) MINICARD 0.5PITCH 67... (PDF, English) <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files: (CAD Format & Compression Information)</p> <ul style="list-style-type: none"> • 2D Drawing (DXF, Version B) • 3D Model (IGES, Version B) • 3D Model (STEP, Version B) 	<p>Related Products:</p> <ul style="list-style-type: none"> • Tooling

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)	
<p>Product Type Features:</p> <ul style="list-style-type: none"> • Product Type = Socket • PCB Mounting Orientation = Right Angle • PCB Mount Style = Surface Mount • Key Type = E <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Contact - Rated Current (A) = 0.5 • Operating Voltage Reference = AC • Operating Voltage (VAC) = 50 <p>Dimensions:</p> <ul style="list-style-type: none"> • Length (X-Axis) (mm [in]) = 21.90 [0.862] • Width (Z-Axis) (mm [in]) = 8.70 [0.343] • Profile Height (Y-Axis) (mm [in]) = 4.20 [0.165] <p>Contact Features:</p> <ul style="list-style-type: none"> • Contact Plating, Mating Area, Material = Gold • Contact Plating = Gold Flash • Contact Base Material = Copper Alloy • Contact Plating, Termination Area, Material = Matte Tin 	<p>Housing Features:</p> <ul style="list-style-type: none"> • Centerline (mm [in]) = 0.50 [0.0197] • Housing Material = High Temperature Thermoplastic • Housing Color = Black <p>Configuration Features:</p> <ul style="list-style-type: none"> • Number of Positions = 67 • Number of Rows = 2 <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Reflow solder capable to 245°C • RoHS/ELV Compliance History = Always was RoHS compliant <p>Packaging Features:</p> <ul style="list-style-type: none"> • Packaging Method = Tape & Reel <p>Other:</p> <ul style="list-style-type: none"> • Brand = TE Connectivity

Feedback

[Investors](#)

[News Room](#)

[Supplier Portal](#)

[Careers](#)

[Terms & Conditions](#)

[Privacy Policy](#)

[AODA Accessibility Policy](#)

[AODA Multi-Year Accessibility
Plan](#)

[Product Cross Reference](#)

[Documents & Drawings](#)

[Product Compliance Support Center](#)

[Site Map](#)

[Find a Phone Number](#)

[Knowledge Base](#)

[Manage Your Account](#)

