

HEADERS & RECEPTACLES



✓ Active

PRODUCT DRAWING Ŧ English 🛃 3D PDF

TE CONNECTIVITY (TE) 02P MTA100 CONN ASSY F/T NATL MTA | MTA-100

3-640621-2 TE Internal Number: 3-640621-2

Always EU RoHS/ELV Compliant

Centerline 2.54 mm [.1 in]

Number of Positions **2**

Number of Rows **1**

Contact Mating Area Plating Material $\mbox{ Tin }$

Contact Mating Area Plating Material Finish Matte

Product Drawings	MTA-100 CONNECTOR ASSEMBLY, 24 AWG, STANDARD PDF English
CAD Files	Customer View Model 3D_IGS.ZIP English
	Customer View Model 3D_STP.ZIP English
	Customer View Model 2D_DXF.ZIP English
	3D PDF PDF English
Catalog Pages/Data Sheets	MTA, CST-100 II, SL-156 And AMP Economy Power (EP) Connectors PDF English
Product Specifications	
Product Specification	Connector, MTA-100 PDF English
Application Specification	MTA 100 Connector PDF English
Product Environmental Complian	ce
TE Material Declaration	MD_3-640621-2_12092015810_dmtec

MD_3-640621-2_12092015810_dmtec PDF English

Ƴ ⊡ f v

Product Type Features	Product Type	Connector
	Connector Type	Connector Assembly
	Connector System	Wire-to-Post
	Wire/Cable Type	Discrete Wire, Stranded
	Strain Relief	With
	Sealed	Νο
	Connector Style	Receptacle
	Applies To	Wire/Cable
	Connector Design	Feed Through
Configuration Features	Number of Positions	2
	Number of Rows	1
	Backwall/Post Interruptions	Without
Electrical Characteristics	Operating Voltage (VAC)	250
Body Features	Cable Exit Angle	90°
Contact Features	Contact Mating Area Plating Material	Tin
	Contact Mating Area Plating Material Finish	Matte
	Contact Mating Area Plating Thickness	2.03 – 5.08 μm [80 – 200 μin]
	Underplate Material	Nickel
	Contact Termination Area Plating Thickness	2.03 – 5.08 μm [80 – 200 μin]
	Underplate Material Thickness	.762 μm, 30 μin
	Contact Termination Area Plating Material	Tin
	Contact Type	Socket
	Contact Current Rating (A)	5
	Contact Layout	Inline
	Contact Termination Area Plating Material Finish	Matte
	Contact Base Material	Copper Alloy
Termination Features	Termination Method to Wire/Cable	IDC
Mechanical Attachment	PCB Mount Alignment	Without
	Matina Datastias	\A/:+L


	ivialing retention	AAICU
	PCB Mount Retention	Without
	Contact Retention	With
	Contact Retention Type	Locking Lance
	Mating Retention Type	Locking Ramp
	Panel Mount Retention	Without
	Mating Alignment	Without
Housing Features	Centerline	2.54 mm [.1 in]
	Housing Color	White
	Housing Style	Standard
	Housing Material	Nylon
Dimensions	Height	7.75 mm [.305 in]
	Wire/Cable Size (AWG)	24
	Wire/Cable Size (mm²)	.2
	Insulation Diameter	1.52 mm [.06 in]
	Length	5.08 mm [.2 in]
Usage Conditions	Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]
Operation/Application	For Use With	MTA .100 Headers & MTA .100 IDC Posted Connectors
	Pick and Place Cover	Without
Industry Standards	UL Flammability Rating	UL 94V-2
	UL File Number	E28476
	CSA Rating	Certified
	Agency/Standard	CSA, UL
	CSA File Number	LR7189
	UL Rating	Recognized
Packaging Features	Packaging Method	Bag/Box
	Packaging Quantity	500
Product Compliance	Statement of Compliance	

Product Compliance

Statement of Compliance PDF

VIEW ALL PRODUCT COMPLIANCE

CUSTOMERS ALSO BOUGHT

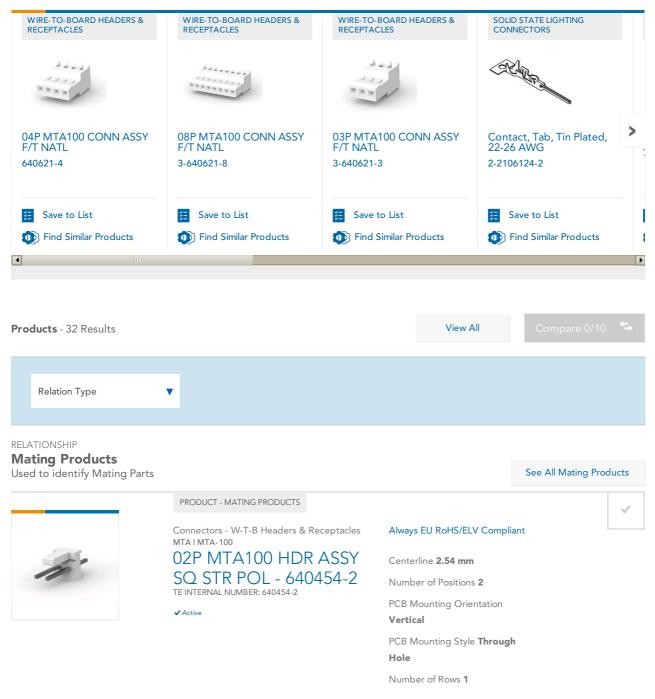

RELATIONSHIP Mating Products Used to identify Mating Parts

See All Mating Products



PRODUCT - MATING PRODUCTS

Connectors - W-T-B Headers & Receptacles MTA I MTA-100 02P MTA100 HDR ASSY

SQ R/A F/L - 640457-2 TE INTERNAL NUMBER: 640457-2

✓ Active

Always EU RoHS/ELV Compliant

Centerline **2.54 mm** Number of Positions **2** PCB Mounting Orientation **Right Angle** PCB Mounting Style **Through Hole**

RELATIONSHIP **Mating Products** Used to identify Mating Parts



PRODUCT - MATING PRODUCTS

Connectors - W-T-B Headers & Receptacles MTA | MTA-100

02P MTA100 R/A HDR RETENTIVE - 3-644694-2 TE INTERNAL NUMBER: 3-644694-2

✓ Active

Always EU RoHS/ELV Compliant

See All Mating Products

Centerline 2.54 mm

Number of Positions **2**

PCB Mounting Orientation **Right**Angle

Number of Rows **1**

Contact Mating Area Plating Material **Tin**