

WIRE-TO-BOARD CONNECTOR CONTACTS







PRODUCT DRAWING



♣ 3D PDF

TE CONNECTIVITY (TE)

CT 1.5MM REC CONT CRIMP TYPE

AMP MINI-CT | AMP Mini CT

353907-1

TE Internal Number: 353907-1

Always EU RoHS/ELV Compliant

Contact Type Socket

Wire/Cable Size (AWG) 28 - 24

Contact Mating Area Plating Material Pre-Tin

Contact Current Rating (A) 2

Packaging Method **Strip**

Product Drawings

AMP MINI COMMON TERMINATED (CT) CONNECTOR 1.5mm PITCH

RECEPTACLE CONTACT(AWG#24~#28), CRIMP TYPE

PDF English

CAD Files

Customer View Model

2D_DXF.ZIP English

3D PDF

Customer View Model

3D_IGS.ZIP English

Customer View Model

3D_STP.ZIP English

Product Specifications

Product Specification

AMP Mini CT Connector 1.5mm Pitch (Crimp Type), Lead Free Version

PDF Japanese

AMP Mini CT Connector 1.5mm Pitch (Crimp Type), Lead Free Version

Instruction Sheet For Mini CT DC Drawer Connector SF Type

Japanese

Instruction Sheet For Mini CT DC Drawer Connector SF Type

English

Mini CT DC Drawer Connector SF Type

Japanese

Mini CT DC Drawer Connector SF Type

Japanese

1.5MM PITCH SIGNAL MATE CONNECTOR

TIF Japanese

1.5MM PITCH SIGNAL MATE CONNECTOR

PDF **Japanese**

AMP Mini Common Termination (CT) Connector 1.5mm Pitch (CRIMP Type)

TIF English

AMP Mini Common Termination (CT) Connector 1.5mm Pitch (CRIMP Type)

PDF

English

Application Specification AMP MINI COMMON TERMINATION (CT) CONNECTOR, 1.5MM PITCH CRIMP

TYPE PDF English

Qualification Test Report 1.5mm Pitch Mini CT DC Drawer Connector SF Type

TIF Japanese

1.5mm Pitch Mini CT DC Drawer Connector SF Type

PDF **Japanese**

Product Environmental Compliance

TE Material Declaration MD_353907-1_102120151250_dmtec

PDF **English**

Instruction Sheets

Instruction Sheet (non U.S.)

1.5mm Pitch Mini CT Hybrid Drawer Connector SF Type

TIF Japanese

1.5mm Pitch Mini CT Hybrid Drawer Connector SF Type

PDF **Japanese**

1.5mm Pitch Mini CT Hybrid Drawer Connector Slim Type

TIF Japanese

1.5mm Pitch Mini CT Hybrid Drawer Connector Slim Type

PDF **Japanese**

1.5mm Pitch Mini CT DC Drawer Connector SF Type

TIF Japanese

1.5mm Pitch Mini CT DC Drawer Connector SF Type

PDF **Japanese**

Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

Product Type Features Connector System Wire-to-Board, Wire-to-Panel, Wire-to-Wire

Wire/Cable Type Discrete Wire

Product Type Contact

Applies To Wire/Cable

Electrical Characteristics Operating Voltage 50 VAC [50 VDC]

Contact Features	Contact Type	Socket
	Contact Mating Area Plating Material	Pre-Tin
	Contact Current Rating (A)	2
	Contact Shape	Rectangular
	Contact Mating Area Plating Thickness	.2 μm [7.87 μin]
	Contact Base Material	Phosphor Bronze
	Contact Transmits (Typical)	Signal (Data)
Termination Features	Termination Method to Wire/Cable	Crimp
	Crimp Area Plating Material	Pre-Tin
Dimensions	Wire/Cable Size (AWG)	28 – 24
	Insulation Diameter	.85 – 1.05 mm [.0334 – .041 in]
Usage Conditions	Operating Temperature Range	-30 – 105 °C [-22 – 221 °F]
Operation/Application	Internal/External	Internal
Industry Standards	UL File Number	E28476
	CSA File Number	LR 7189-133
	Agency/Standard	CSA, UL
Packaging Features	Packaging Method	Strip
	Packaging Quantity	15000
Product Compliance	Statement of Compliance	


Product Compliance Statement of Compliance

PDF

VIEW ALL PRODUCT COMPLIANCE

CUSTOMERS ALSO BOUGHT



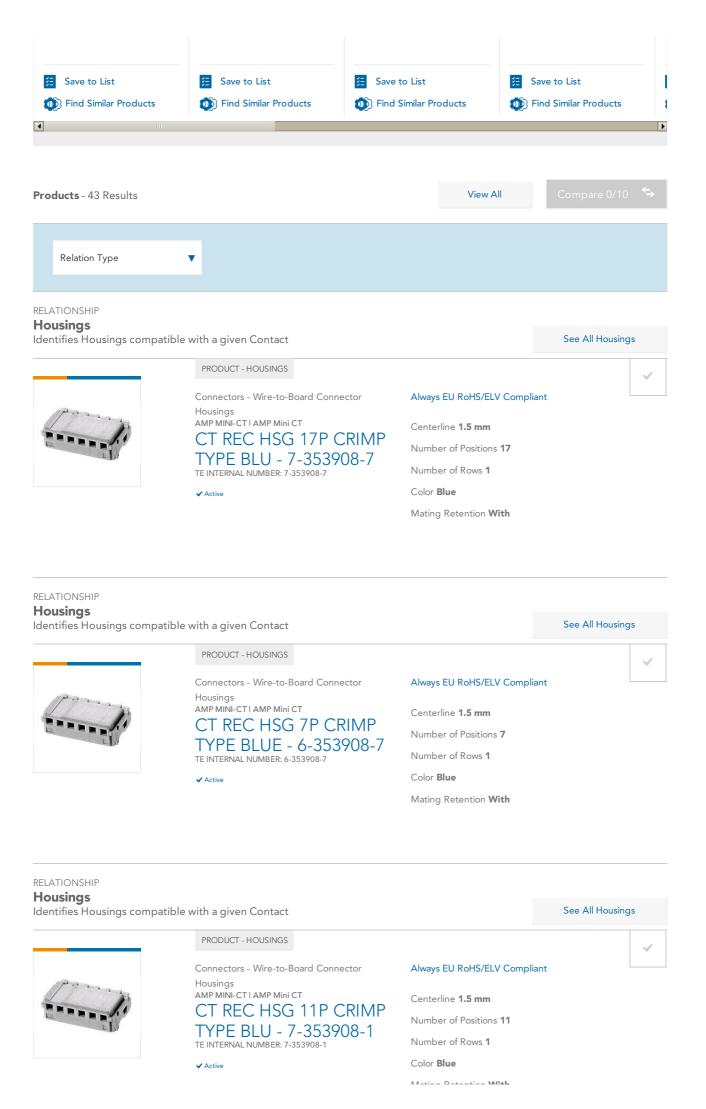

iviating ketention with