


### 250 Series FASTON Tabs – Wire Crimp

Tab Thickness: .032 [0.81]

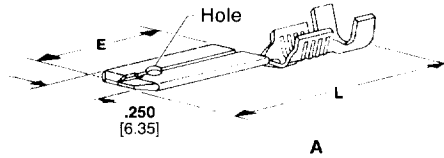


Wire Range AWG	Style	Insulation Diameter	Stock Thickness	Dimensions		Material and Finish	Terminal Part Numbers	UL	UL	CS	Quick-Change Applicator No.*
				L	E						
22-18	A	.080-.120 2.03-3.05	.016 0.41	.815	.370	Tin Plated Brass	42475-4	—	X	X	466432-2
				20.70	9.40		42474-3	—	X	X	466431-2
18-14	A	.110-.150 2.79-3.81	.016 0.41	.810	.370	Tin Plated Brass	42474-3	—	X	X	466431-2
				20.57	9.40		42474-4	—	X	X	466431-2
14-12	A	.110-.170 2.79-4.32	.016 0.41	.810	.370	Silver Plated Brass	61362-2	—	X	X	466467-4

### 250 Series FASTON Tabs – Printed Circuit Board

Stock Thickness: .032 [0.81]


Board Hole Size: .055 ± .002  
[1.40 ± 0.05] on Centers

<sup>1</sup>Loose Piece Board Hole Size:  
.060 ± .053 [1.52 ± 1.35] on Centers



Material and Finish	Dimensions				Terminal Part Numbers	UL	UL	CS
	W	L	K	E				
Tin Plated Brass	.295	.622	.125	.312	62409-1 <sup>1</sup>	—	X	X
	7.49	15.80	3.18	7.92				
	.280	.622	.125	.452	63755-1 <sup>2</sup>	—	—	—
	7.11	15.80	3.18	11.48				
	.312	.650	.150	.410	1217126-1	—	—	X
	7.92	16.50	3.81	10.41				
	.312	.582	.180	.312	1217136-1	—	—	X
	7.92	14.78	4.57	7.92				
	.312	.780	.150	.540	1217167-1	—	—	X
	7.92	19.81	3.81	13.72				

<sup>1</sup> Loose piece only.  
<sup>2</sup> Insertion equipment available.

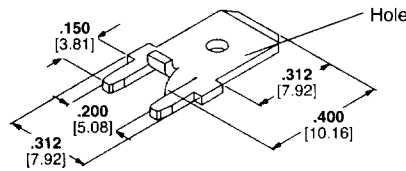

Material and Finish	Terminal Part Number	UL	UL	CS
Tin Plated Brass	63849-1 <sup>1</sup>	—	X	X

<sup>1</sup> Loose piece only

\* Quick-Change Applicator for  
AMP-O-LECTRIC Machine  
565435-5. For AMPOMATOR  
Machine and other machines not  
listed, consult Tyco Electronics.

For complete product information, order Catalog 82004