


FASTIN-FASTON Product Line (Continued)


**250 Series
6 Circuit Connectors
(Housings)**

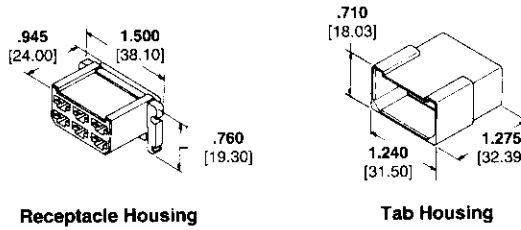

Material	UL 94 ¹	Color	Part Numbers		UL	CS
			Receptacle	Tab		
Nylon	V2	Natural	480003-5	480004-5	X	X
		Black	1-480281-0 ²	1-480282-0	X	X

¹ Flammability rating.
² No mounting ears.


**250 Series
Receptacles
(For use with multiple
circuit connectors)
Fits Tab — .032 [0.81]
Stock Thickness — .012 [0.30]
Without Mating Dimple**

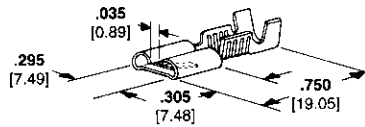

Wire Range AWG	Insulation Diameter	Material and Finish	Terminal Part Number	UL	CS	Quick-Change Applicator No. ¹
22-18	.085-.125 2.16-3.18	Tin-Plated Brass	60295-2	X	X	687981-2
	.060-.100 1.52-2.54	Tin-Plated Brass	60413-1	X	X	687979-3
18-14	.100-.170 2.54-4.32	Brass	42100-1	X	X	687932-2
		Tin-Plated Brass	42100-2	X	X	687932-2
16-12 or (2) 16	.160-.210 4.06-5.33 or (2) .130 Max. 3.30	Tin-Plated Brass	60253-2	X	X	466058-2
12-10	.134-.200 3.40-5.08	Brass	180351-1	—	—	—
		Pre-Tin-Plated Brass	180351-2	—	—	—

¹ Quick-Change Applicator for AMP-O-ELECTRIC Machine 565435-5.
For AMPOMATOR Machine and other machines not listed, contact Tyco Electronics.

**250 Series
8 Circuit Connectors
(Housings)**

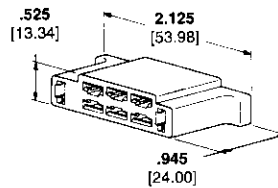

Mating Face

8 Circuit Connectors (Receptacle Housing)

Material	UL 94 ¹	Color	Housing Part Number	UL	CS
Nylon	V2	Natural	480173-1 520965-1 ²	X	X

¹ Flammability rating of plastic material.
² All circuits accept receptacles without locking dimple.

FASTIN-FASTON
Product Line