

BOARD-TO-BOARD HEADERS & RECEPTACLES







PRODUCT DRAWING



3D PDF

TE CONNECTIVITY (TE)

0.8FH,R09H.5,100,08/Sn,TR,SC

0.8mm FH | .8mm FH

5-5179180-4

TE Internal Number: 5-5179180-4

Always EU RoHS/ELV Compliant

Connector Style Receptacle

Centerline .031 mm [.8 in]

Stack Height (mm) 9, 10, 11, 12

Stack Height (in) .472

Number of Positions 100

Packaging Method Tape & Reel

Product Drawings

REC ASSY 9H TYPE (0.5 BOSS L) FOR 0.8MM B-T-B CONN, ON TAPING

PDF (TIFF AVAILABLE)

English

REC ASSY 9H TYPE (0.5 BOSS L) FOR 0.8MM B-T-B CONN, ON TAPING

PDF (TIFF AVAILABLE)

English

CAD Files

3D PDF

PDF **3D**

Customer View Model

2D_DXF.ZIP English

Customer View Model

3D_IGS.ZIP English

Customer View Model

3D_STP.ZIP English

Catalog Pages/Data Sheets

Fine Pitch Stacking Connectors - 0.8mm Free Height (FH) Connectors

PDF English

Product Specifications

Product Specification Free Height 0.8 Mm Pitch Board-To-Board Connector (SMT)

PDF **English**

Product Environmental Compliance

TE Material Declaration

MD_5-5179180-4_051920141046_dmtec

PDF English Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

Product Type Features	Connector Style	Receptacle
	Board-to-Board Configuration	Mezzanine
	PCB Mounting Orientation	Vertical
	Row-to-Row Spacing	2.4 mm [.09432 in]
	Applies To	Printed Circuit Board
	Product Type	Connector
	Boss	With
	Series	Free Height
Configuration Features	Number of Positions	100
	Cover	With
	Preloaded	Yes
	Number of Rows	2
	Stackable	Yes
Electrical Characteristics	Insulation Resistance (VAC)	500
	Voltage (VAC)	100
	Dielectric Withstanding Voltage (VAC)	500
Body Features	Cover Material	Steel
body realdies	Cover Type	Vacuum Cover
	Sealant Sealant	Without
	Sedidiff	Without
Contact Features	Contact Mating Area Plating Material	Gold
	Contact Mating Area Plating Thickness (µm)	.2
	Contact Current Rating (A)	.5
	Contact Type	Pin
	Solder Tail Contact Plating Material	Tin over Nickel
	Contact Layout	Inline
	Solder Tail Contact Plating Material Finish	Matte
	Solder Tail Contact Plating Thickness	1 μm [39.37 μin]
	Contact Base Material	Beryllium Copper

Termination Features Termination Method to PC Board

Surface Mount


Mechanical Attachment	Mating Alignment Type	Polarized
	PCB Mount Retention	Without
	PCB Mount Retention Type	None
	PCB Mount Alignment Type	Positioning Bosses
	Locating Post Length (mm)	.5
	Locating Post Length (in)	.0196
Housing Features	Centerline	.031 mm [.8 in]
	Housing Material	LCP (Liquid Crystal Polymer)
	Housing Color	Natural
	Housing Entry Style	Тор
Dimensions	Stack Height (mm)	9, 10, 11, 12
	Stack Height (in)	.472
	Height	9 mm [.35 in]
Usage Conditions	Operating Temperature Range	-40 – 85 °C [-40 – 185 °F]
Operation/Application	Pick and Place Cover	With
	Assembly Process Feature	None
ndustry Standards	UL Flammability Rating	UL 94V-0
Packaging Features	Packaging Method	Tape & Reel
	Packaging Quantity	400
Product Compliance	Statement of Compliance	

PDF

VIEW ALL PRODUCT COMPLIANCE

CUSTOMERS ALSO BOUGHT



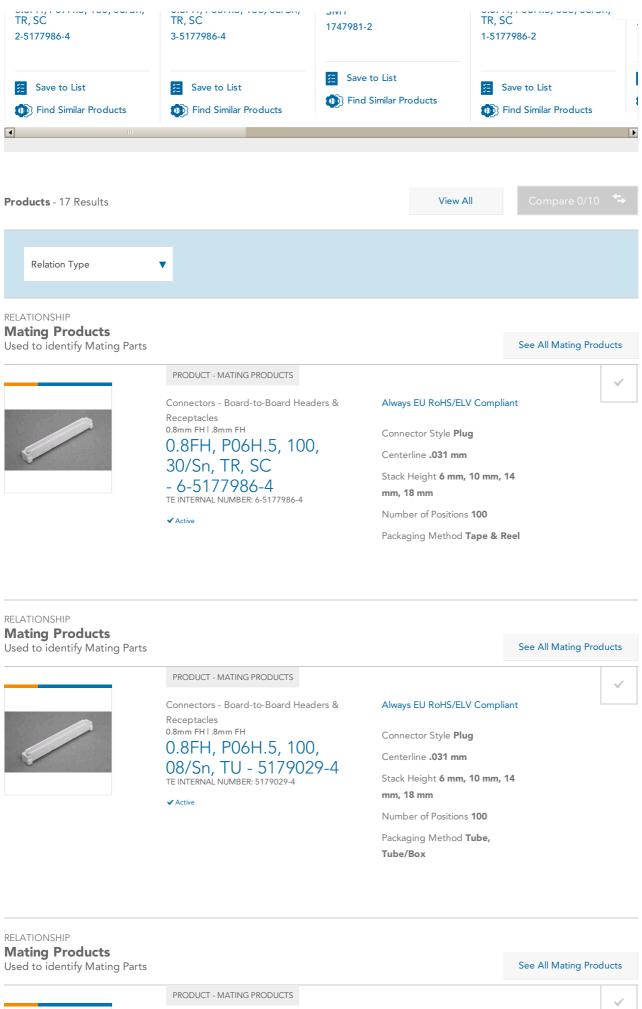

Connectors - Board-to-Board Headers & Receptacles
0.8mm FH I .8mm FH

Always EU RoHS/ELV Compliant

Connector Style Plug



0.8FH, P07H.5, 100, 08/Sn, TU - 5179030-4 TE INTERNAL NUMBER: 5179030-4

✓ Active

Centerline .031 mm

Stack Height 7 mm, 11 mm, 15 mm, 19 mm

Number of Positions 100

Packaging Method **Tube**, Tube/Box