

## **BOARD-TO-BOARD HEADERS & RECEPTACLES**





✓ Active

<u>+</u>

PRODUCT DRAWING



3D PDF

TE CONNECTIVITY (TE)

0.8FH,R05H.5,080,08/Sn,TR,SC

0.8mm FH | .8mm FH

5177985-3

TE Internal Number: 5177985-3

Always EU RoHS/ELV Compliant

Connector Style Receptacle

Centerline .031 mm [.8 in]

Stack Height (mm) 5, 6, 7, 8

Stack Height (in) .315

Number of Positions 80

Packaging Method Reel

**Product Drawings** 

RECEPTACLE ASSY 5H TYPE (0.5 BOSS LENGTH) FOR FH 0.8 B-T-B CONN. ON

**TAPING** 

PDF (TIFF AVAILABLE)

English

RECEPTACLE ASSY 5H TYPE (0.5 BOSS LENGTH) FOR FH 0.8 B-T-B CONN. ON

TAPING

PDF (TIFF AVAILABLE)

English

**CAD Files** 

3D PDF

PDF **English** 

**Customer View Model** 

3D\_IGS.ZIP **English** 

**Customer View Model** 

3D\_STP.ZIP **English** 

**Customer View Model** 

2D\_DXF.ZIP **English** 

Catalog Pages/Data Sheets

Fine Pitch Stacking Connectors - 0.8mm Free Height (FH) Connectors

PDF **English** 

**Product Specifications** 

Product Specification Free Height 0.8 Mm Pitch Board-To-Board Connector (SMT)

PDF **English** 

Product Environmental Compliance

TE Material Declaration

0.8FH,R05H.5,080,08/Sn,TR,SC


PDF **English**  Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.


Product Type Features	Connector Style	Receptacle
	Board-to-Board Configuration	Mezzanine
	PCB Mounting Orientation	Vertical
	Row-to-Row Spacing	2.4 mm [ .09432 in ]
	Product Type	Connector
	Applies To	Printed Circuit Board
	Boss	With
	Series	Free Height
Configuration Features	Number of Positions	80
	Cover	With
	Preloaded	Yes
	Number of Rows	2
	Stackable	Yes
Electrical Characteristics	Insulation Resistance (VAC)	500
	Voltage (VAC)	100
	Dielectric Withstanding Voltage (VAC)	500
Body Features	Cover Material	Steel
	Cover Type	Vacuum Cover
	Sealant	Without
	Scalare	· · · · · · · · · · · · · · · · · · ·
Contact Features	Contact Mating Area Plating Material	Gold
	Contact Mating Area Plating Thickness (µin)	8
	Contact Shape	Square
	Contact Current Rating (A)	.5
	Contact Type	Socket
	Solder Tail Contact Plating Material	Tin over Nickel
	Contact Layout	Inline
	Solder Tail Contact Plating Material Finish	Matte
	Solder Tail Contact Plating Thickness	2 μm [ 78.74 μin ]
	Contact Base Material	Copper Alloy


Termination Features	Termination Method to PC Board	Surface Mount
Mechanical Attachment	Mating Alignment Type  PCB Mount Retention  PCB Mount Retention Type  PCB Mount Alignment Type  Locating Post Length (mm)  Locating Post Length (in)	Polarized Without None Positioning Bosses .5 .0196
Housing Features	Centerline  Housing Material  Housing Color  Housing Entry Style	.031 mm [ .8 in ]  LCP (Liquid Crystal Polymer)  Natural  Top
Dimensions	Stack Height (mm)  Stack Height (in)  Height	5, 6, 7, 8 .315 5 mm [ .197 in ]
Usage Conditions	Operating Temperature Range Housing Material Temperature	-40 – 85 °C [-40 – 185 °F] High
Operation/Application	Pick and Place Cover  Assembly Process Feature  For Use With	Without None Plug Assembly
Industry Standards	UL Flammability Rating	UL 94V-0
Packaging Features	Packaging Method Packaging Quantity	Reel 1000
Product Compliance	Statement of Compliance PDF  VIEW ALL PRODUCT COMPLIANCE	


## **CUSTOMERS ALSO BOUGHT**

BOARD-TO-BOARD HEADERS BOARD-TO-BOARD HEADERS BOARD-TO-BOARD HEADERS SO DIMM SOCKETS

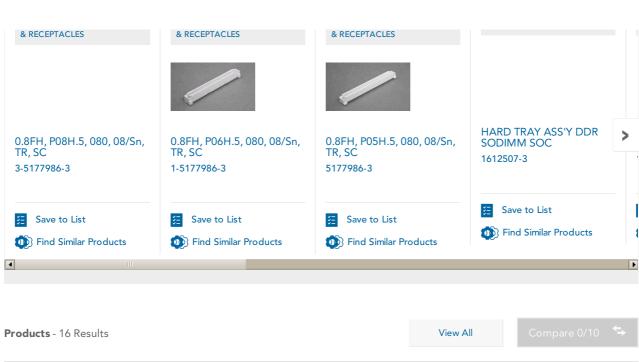

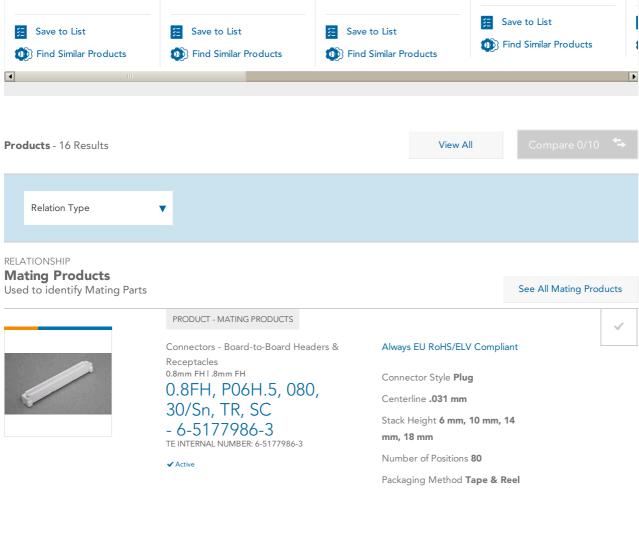

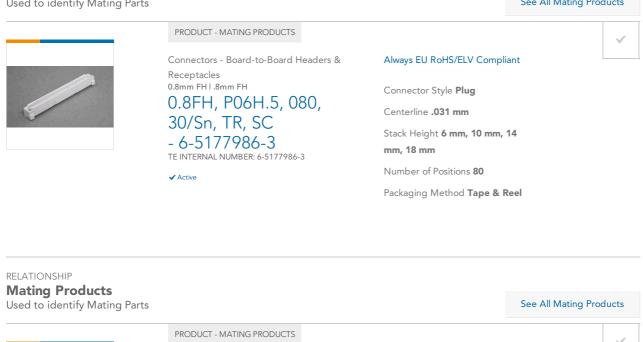

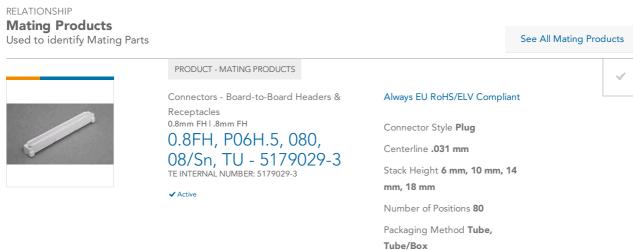



PRODUCT - MATING PRODUCTS

Connectors - Board-to-Board Headers & Receptacles
0.8mm FH | .8mm FH

0.8FH, P05H.5, 080, 30/Sn, TR, SC - 5-5177986-3
TE INTERNAL NUMBER: 5-5177986-3

✓ Active

Always EU RoHS/ELV Compliant

Connector Style **Plug** 

Centerline .031 mm

Stack Height 5 mm, 9 mm, 13 mm, 17 mm

Number of Positions 80

Packaging Method Tape & Reel