


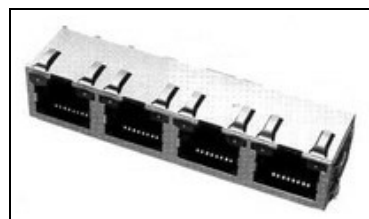

## 5406544-2 Product Details

[Share](#) [Print](#) [Email](#)


**5406544-2**

### PCB Mounted Jacks - Single Port, Multi-port and Stacked

Always EU RoHS/ELV Compliant (Statement of Compliance)

**Product Highlights:**

- Connector
- Preloaded
- Multiple Port Configuration
- 1 x 4 Jack Configuration
- Jack Type = RJ45

[View all Features](#)
**Quick Links**

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 5406544-2

**Active**
[View 3D PDF](#)
[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

### Documentation & Additional Information

**Product Drawings:**

- [INVERTED MOD JACK ASSEMBLY, 1x4, SHIELDED, PANEL GROUND](#) (PDF, English)

**Catalog Pages/Data Sheets:**

- None Available

**Product Specifications:**

- None Available

**Application Specifications:**

- None Available

**Instruction Sheets:**

- None Available

**CAD Files: (CAD Format & Compression Information)**

- [2D Drawing](#) (DXF, Version A)
- [3D Model](#) (IGES, Version A)
- [3D Model](#) (STEP, Version A)

[List all Documents](#)
**Additional Information:**

- [Product Line Information](#)

**Related Products:**

- [Tooling](#)

### Product Features (Please use the Product Drawing for all design activity)

**Product Type Features:**

- Product Type = Connector
- Jack Type = RJ45
- PCB Mounting Orientation = Side Entry (Right Angle)
- PCB Mount Style = Through Hole
- Performance Category = Cat 5
- LED = Without
- Grounding Options = Panel Ground and PCB Ground
- Panel Stops = Without
- Keyed = No
- Profile = Standard
- Color = Black

**Mechanical Attachment:**

- Panel Mount Retention = Without

**Termination Features:**

- Termination Method to PC Board = Solder

**Dimensions:**

- PCB Tail Length (mm [in]) = 2.54 [0.100]

**Body Features:**

- Inverted Jack Face = Yes
- Shield Plating = Tin over Copper
- Number of Contacts Loaded, RJ45 (8 Positions) = 8
- Shield Material = Copper Zinc Alloy
- PCB Ground Tab Location (mm [in]) = -3.43 [-0.135]

**Housing Features:**

- Housing Material = High Temperature Thermoplastic

**Configuration Features:**

- Preloaded = Yes
- Port Configuration = Multiple
- Jack Configuration = 1 x 4
- Number of Positions = 8
- Shielded = Yes
- Number of Contacts Loaded = 8
- Number of PCB Ground Tabs = 2
- Number of Panel Ground Tabs = 12

**Industry Standards:**

- RoHS/ELV Compliance = RoHS compliant, ELV compliant
- Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C
- RoHS/ELV Compliance History = Always was RoHS compliant
- UL Flammability Rating = UL 94V-0

**Packaging Features:**

- Packaging Method = Tape & Reel
- Packaging Quantity = 32

**Product Availability:**

- Region = Asia, North America

**Other:**

- Brand = AMP

**Contact Features:**

- [Solder Tail Contact Plating](#) = Tin over Nickel
- [Contact Plating, Mating Area, Material](#) = Gold (50)
- [Contact Base Material](#) = Phosphor Bronze

- Comment = Recommended applications: Fast Ethernet, 10Base-T Ethernet, and 10/100 Base-T Ethernet (Cat 5 on two pair 1/2, 3/6).

**Corporate Information**

[About TE](#)  
[Investors](#)  
[News Room](#)  
[Supplier Portal](#)  
[Careers](#)  
[Terms & Conditions](#)  
[Privacy Policy](#)  
[AODA Accessibility Policy](#)  
[AODA Multi-Year Accessibility Plan](#)

**Quick Links**

[Distributor Inventory](#)  
[Product Cross Reference](#)  
[Documents & Drawings](#)  
[Product Compliance Support Center](#)  
[Site Map](#)

**Customer Support**

[Email or Chat With Us](#)  
[Find a Phone Number](#)  
[Knowledge Base](#)  
[Manage Your Account](#)

**Keep Me Informed**