



187 Series Tab-Lok Flags


**Flag Receptacles,
Insulation Support**

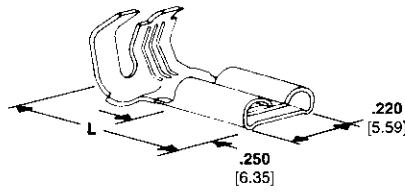


A — Premier Line

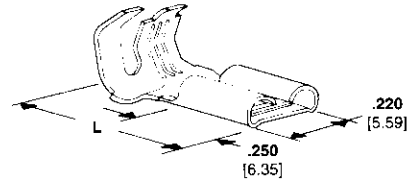

B — Budget Line

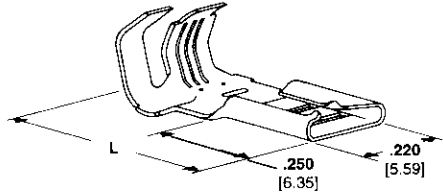

C — Economy Line



D — Moldable Line

FASTON Receptacles

Wire Range AWG	Style	Tab Fit	Insulation Diameter	Material and Finish	Stock Thickness	L (Overall Length)	UL	RA	SB	Terminal Part Number			
20-16	A	.020	.110-.170	Brass	.012	.530	X	—	X	42486-1			
		0.51	2.79-4.32		0.31	13.46							
		.020	.110-.170	Brass, Tin Plated	.012	.530	X	—	X	42486-2			
		0.51	2.79-4.32		0.31	13.46							
		.020	.110-.170	Steel, Nickel Plated	.012	.530	—	X	X	42486-3			
		0.51	2.79-4.32		0.31	13.46							
	B		.020	.110-.170	Brass, Silver Plated	.012	.530	X	—	X	42486-4		
			0.51	2.79-4.32		0.31	13.46						
				.032	.110-.170	Brass, Tin Plated	.012	.530	X	—	X	62591-1	
				0.81	2.79-4.32		0.31	13.46					
					.032	.110-.170	Steel, Nickel Plated	.012	.530	—	X	X	63696-1
					0.81	2.79-4.32		0.31	13.46				
	C		.020	.110-.170	Brass	.012	.530	X	—	X	42618-1		
			0.51	2.79-4.32		0.31	13.46						
				.020	.110-.170	Brass, Tin Plated	.012	.530	X	—	X	42618-2	
				0.51	2.79-4.32		0.31	13.46					
			.020	.170-.225	Brass	.012	.575	X	—	X	62817-1		
			0.51	4.32-5.72		0.31	14.61						
D		.032	.110-.170	Brass	.012	.530	X	—	X	63748-1			
		0.81	2.79-4.32		0.31	13.46							
			.020	.110-.170	Brass	.012	.530	X	—	X	42800-1		
			0.51	2.79-4.32		0.31	13.46						
			.020	.110-.170	Brass, Tin Plated	.012	.530	X	—	X	42800-2		
			0.51	2.79-4.32		0.31	13.46						
18-14		.032	.110-.170	Brass	.012	.530	X	—	X	60529-1			
		0.81	2.79-4.32		0.31	13.46							
			.032	.110-.170	Brass, Tin Plated	.012	.530	X	—	X	60529-2		
			0.81	2.79-4.32		0.31	13.46						
			.020	.110-.170	Brass	.012	.530	X	—	X	61029-1		
			0.51	2.79-4.32		0.31	13.46						
		.020	.110-.170	Brass, Tin Plated	.012	.530	X	—	X	61029-2			
		0.51	2.79-4.32		0.31	13.46							
		.032	.110-.190	Brass	.014	.530	X	—	X	1217027-1			
		0.81	2.79-4.83	Tin Plated	0.36	13.46							