


**110 SERIES RECEPTACLES  
 STRAIGHT NON-INSULATION SUPPORT**

**FASTON Receptacles**  
 Stock Thickness: .010

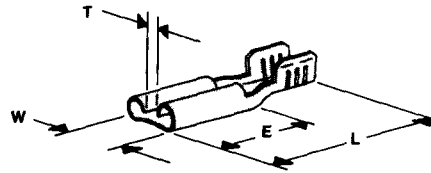

Wire Range AWG	Fits Tab Type <sup>2</sup>	Fits Tab	Dimensions				Material and Finish	Terminal Part No.		Quick-Change Applicator No. <sup>3</sup>		
			W	L	E	T						
26-22	—	.020	.138	.327	.140	.028	Tin Plated Brass	63837-1	X	—	X	486090-2
24-22	—	.016	.138	.327	.140	.028	Brass	81818-1	—	—	—	486090-2
20-18 or (2) 20	1	.016	.148	.475	.250	.028	Pre-Tin Brass	42398-1	—	—	—	687954-2
	1	.020	.148	.475	.250	.028	Pre-Tin Brass	42399-1	X	—	X	687954-2
	1	.032	.148	.475	.250	.028	Brass	42399-2	X	—	X	687954-2
	1	.025	.150	.475	.250	.028	Pre-Tin Brass	60601-1	X	—	X	687954-2
	2	.016	.148	.475	.250	.028	Pre-Tin Brass	62345-1	—	—	—	687954-2
20-18	1, 2, 3	.020	.148	.380	.200	.028	Pre-Tin Brass	60967-1	X	—	X	486183-2
							Tin Plated Brass	62850-2 <sup>1</sup>	X	—	X	687954-2
20-16	1	.016	.150	.537	.250	.025	Pre-Tin Brass	62850-1 <sup>1</sup>	—	—	—	687891-2
							Pre-Tin Brass	61457-1	—	—	—	687891-2
20-16	1	.032	.148	.415	.190	.028	Pre-Tin Brass	63560-1	X	—	X	567350-2
							Pre-Tin Brass	63471-1	X	—	X	687891-2
18-14	1	.020	.148	.475	.250	.025	Pre-Tin Brass	62852-1 <sup>4</sup>	X	—	X	486573-1
							Tin Plated Brass	62474-1 <sup>3,4</sup>	X	—	X	486573-1

<sup>1</sup>No dimple.  
<sup>2</sup>See page 34.  
<sup>3</sup>Dimple at special location.  
<sup>4</sup>Side feed.

■ Quick-Change Applicator for AMP-O-LECTRIC Machine 565435-5.  
 For AMPOMATOR Machine and other machines not listed, contact AMP Incorporated.

For drawings, technical data or samples, contact your AMP sales engineer or call the AMP Product Information Center: 1-800-522-6752.  
 Dimensions are in inches and millimeters unless otherwise specified. Values in brackets are metric equivalents.  
 Specifications subject to change. Consult AMP for latest specifications.