


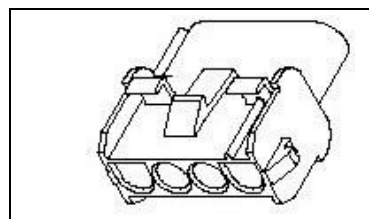

794707-1 Product Details


794707-1

.250" Centerline, 600 V, 19 - 36 A max

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Universal MATE-N-LOK Product Line
- Wire-to-Panel, Wire-to-Wire
- Applies To Panel, Applies To Wire/Cable
- Connector
- Housing

[View all Features](#)

TE Internal Number: 794707-1

Active

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)
Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)
Product Type Features:

- Product Line = Universal MATE-N-LOK
- Product Type = Connector
- Connector Type = Housing
- Sealed = No
- CSA File Number = LR 7189

Mechanical Attachment:

- Contact Retention = Without
- Mating Retention Type = Locking Tab
- Panel Mount Retention = With
- Panel Mount Retention Type = Latch(es)

Electrical Characteristics:

- Operating Voltage Reference = AC
- Operating Voltage (VAC) = 600

Dimensions:

- Panel Thickness (mm [in]) = 0.76 - 2.29 [0.030 - 0.090]

Body Features:

- Mating Retention = With
- Assembly Integration Feature = Without

Contact Features:

- Contact Type = Pin or Socket
- Contact Layout = In-Line
- Multiple Contact Types = Without

Housing Features:

- Connector Style = Receptacle
- Centerline (mm [in]) = 6.35 [0.2499]
- Housing Material = Nylon - GF
- Housing Color = Black
- Mating Alignment = With
- Mating Alignment Type = Polarization

Configuration Features:

- Number of Positions = 4
- Number of Rows = 1

Industry Standards:

- Agency/Standard = CSA, UL
- UL Flammability Rating = UL 94V-2
- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant
- VDE Tested = Yes
- UL Rating = Recognized
- UL File Number = E28476
- CSA Rating = Certified

Environmental:

- Operating Temperature (°C [°F]) = -55 - +125 [-67 - +257]

Conditions for Usage:

- Applies To = Panel, Wire/Cable
- Glow Wire Rating = Standard Part - Not Glow Wire
- For Use With = Appropriate Universal MATE-N-LOK Plug

Operation/Application:

- Application Use = Wire-to-Wire, Wire-to-Panel

Packaging Features:

- Packaging Method = Package
- Packaging Quantity = 1

Other:

- Brand = TE Connectivity

Feedback

[Supplier Portal](#)

[Careers](#)

[Terms & Conditions](#)

[Privacy Policy](#)

[AODA Accessibility Policy](#)

[AODA Multi-Year Accessibility
Plan](#)

[Product Compliance Support Center](#)

[Site Map](#)

[Manage Your Account](#)

