




927892-1 Product Details

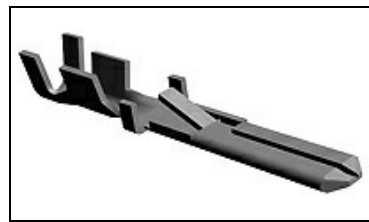

927892-1

TE Internal Number: 927892-1

Active

Timer Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Timer Products Product Line
- Junior Timer Series, Junior-Power-Timer (JPT) Series, Multiple Circuit Housings with Tabs & Receptacles (Including FASTIN-FASTON) Series
- Wire-to-Wire
- Applies To Wire/Cable
- Contact

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

| Documentation & Additional Information | |
|--|--|
| Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later. | <p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Additional Product Images:</p> <ul style="list-style-type: none"> • Line Drawing <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling |

Product Features (Please use the Product Drawing for all design activity)

| | |
|--|--|
| <p>Product Type Features:</p> <ul style="list-style-type: none"> • Product Line = Timer Products • Product Type = Contact • Cable Type = FLR (Thin Walled Cable) - RB • Wire/Cable Type = Discrete Wire • Insulation Support = With <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Contact - Rated Current (A) = 25 <p>Termination Features:</p> <ul style="list-style-type: none"> • Wire/Cable Size (AWG) = 17 - 20 • Wire/Cable Size (mm²) = 0.5 - 1 • Termination Method to Wire/Cable = Crimp <p>Dimensions:</p> <ul style="list-style-type: none"> • Mating Area Interface Dimensions (mm [in]) = 2.79 x 0.79 [.110 x .031] <p>Contact Features:</p> <ul style="list-style-type: none"> • Contact Type = Tab • Contact Design = FASTIN-FASTON • Contact Base Material = CuZn30 • Contact Plating, Mating Area, Material = Pre-Tin • Contact Plating, Mating Area, Thickness (µm [µin]) = 1 [39.37] | <p>Configuration Features:</p> <ul style="list-style-type: none"> • GET 0.64 Connector System = No • Single Wire Sealing System = No <p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Not relevant for lead free process • RoHS/ELV Compliance History = Always was RoHS compliant <p>Environmental:</p> <ul style="list-style-type: none"> • Operating Temperature (°C [°F]) = -40 - +130 [-40 - +266] <p>Conditions for Usage:</p> <ul style="list-style-type: none"> • Applies To = Wire/Cable • Accepts Wire Insulation Diameter, Range (mm [in]) = 1.60 - 2.20 [0.063 - 0.0866] <p>Operation/Application:</p> <ul style="list-style-type: none"> • Application Use = Wire-to-Wire • Contact Transmits (Typical Application) = Power <p>Packaging Features:</p> <ul style="list-style-type: none"> • Packaging Method = Reel • Packaging Quantity = 4,000 <p>Other:</p> <ul style="list-style-type: none"> • Series = Junior Timer, Junior-Power-Timer (JPT), Multiple Circuit Housings with Tabs & Receptacles (Including FASTIN-FASTON) • Brand = AMP |
|--|--|

Feedback

Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

Keep Me Informed



