




## 928781-1 Product Details

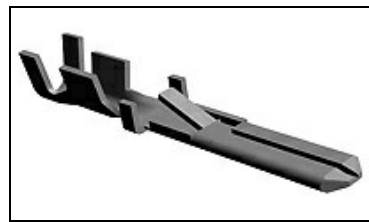

**928781-1**

TE Internal Number: 928781-1

**Active**

### Timer Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

#### Product Highlights:

- Timer Products Product Line
- Junior Timer Series, Junior-Power-Timer (JPT) Series, Multiple Circuit Housings with Tabs & Receptacles (Including FASTIN-FASTON) Series
- Wire-to-Wire
- Applies To Wire/Cable
- Contact

[View all Features](#)

### Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

### Documentation & Additional Information

Documents are temporarily unavailable. We are working hard to correct the problem. Please try again later.

- Additional Information:**
- [Product Line Information](#)
- Additional Product Images:**
- [Line Drawing](#)
- Related Products:**
- [Tooling](#)

### Product Features (Please use the Product Drawing for all design activity)

**Product Type Features:**

- Product Line = Timer Products
- [Product Type](#) = Contact
- Cable Type = FLR (Thin Walled Cable)
- Wire/Cable Type = Discrete Wire
- Insulation Support = With

**Electrical Characteristics:**

- Contact - Rated Current (A) = 25

**Termination Features:**

- Wire/Cable Size (AWG) = 13 - 17
- Wire/Cable Size (mm<sup>2</sup>) = 1 - 2.5
- Termination Method to Wire/Cable = Crimp

**Dimensions:**

- Mating Area Interface Dimensions (mm [in]) = 2.79 x 0.79 [.110 x .031]

**Contact Features:**

- Contact Type = Tab
- Contact Design = FASTIN-FASTON
- Contact Base Material = CuZn30
- Contact Plating, Mating Area, Material = Select Silver
- Contact Plating, Mating Area, Thickness (µm [µin]) = 3 [118]

**Configuration Features:**

- GET 0.64 Connector System = No
- Single Wire Sealing System = No

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

**Environmental:**

- Operating Temperature (°C [°F]) = -40 - +140 [-40 - +284]

**Conditions for Usage:**

- Applies To = Wire/Cable
- Accepts Wire Insulation Diameter, Range (mm [in]) = 1.80 - 2.90 [0.071 - 0.114]

**Operation/Application:**

- Application Use = Wire-to-Wire
- Contact Transmits (Typical Application) = Power

**Packaging Features:**

- Packaging Method = Reel
- Packaging Quantity = 3,500

**Other:**

- Series = Junior Timer, Junior-Power-Timer (JPT), Multiple Circuit Housings with Tabs & Receptacles (Including FASTIN-FASTON)
- Brand = AMP

Feedback

### Corporate Information

- [About TE](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

### Quick Links

- [Distributor Inventory](#)
- [Product Cross Reference](#)
- [Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

### Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Knowledge Base](#)
- [Manage Your Account](#)

### Keep Me Informed



