



DEUTSCH

BRANCHE CONNECTEURS AEROMILITAIRES



Single Module EN4165

Arinc 809 - BACC65 - EN4165

The DMC-M is a modular rectangular connector which was designed and developed by Deutsch in the 1980's. It has since set the modular connector standard in the Aerospace & Military industries, and is now standardised by European Specification **EN4165**.

■ The modularity

The DMC-M is designed to address a wide range of requirements due to its wide range of contacts arrangements : from contacts size 22 to size 8, but also coaxial, quadrax, **high speed Ethernet or optical contacts**.

Each mated half of the DMC-M connector can contain both male and female configurations which allow you to mix input and output with signal and power supply. You can easily modify your system by simply removing modules from the shells and replace them with a new layout. This makes the DMC-M perfect for both **new designs** and **retrofit applications**.



■ The safety

The DMC-M provides a large number of insert layout possibilities. It allows different keying possibilities between plugs and receptacles.

The DMC-M provides a real EMI protection following most stringent Aerospace and Military specifications. In addition of Series II, DMC-M scoop proof Series III inserts and shells are **developped to increase mating security**.



■ The reliability

To increase the level of reliability of the cabin interconnections, the Single Module DMC-M is compliant with the most demanding avionic specifications, in terms of **sealing**, vibrations, **smoke and toxicity** or mechanical endurance in accordance with EN4165.



■ The weight optimization

Weight saving is commonly a high concern, the Single Module DMC-M has been designed in **composite** with a metallized plating for weight and mass saving.





ARINC809 - BACC65 - EN4165

The New Standard Connector for Aircraft equipment and cabin systems.

Advantages

Light weight composite, modularity, color and mechanical coded, push pull coupling are the key features of this connector. In addition the EN4165 range is aluminium cable contact compliant.

Standard

ARINC809, BACC65, EN4165 qualified

Markets & Application

Cabin and avionic systems
Military - Railway

Technical characteristics

Housing : Composite
 Plating : Nickel
 Inserts : Thermoplastic and FSR
 Vibrations : 20 g
 Durability : 500 mating cycles
 Salt spray : 500 hours
 Contacts : Copper alloy with gold on nickel plating
 Interfacial sealing: $1,1 \cdot 10^{-2}$ bar

Electrical characteristics

Temperature range : -55° C to + 175° C
 Insulation resistance : $\geq 5000 \text{ M}\Omega$
 Maximum current : Size 22 : 5 A
 Size 20 : 7,5 A
 Size 16 : 13 A
 Size 12 : 23 A
 Size 8 : 46 A

EMI shielding performance


MHz frequency	100	200	300	400	800	1000
Attenuation (dB)	90	88	88	87	85	85

Weight

Extender Receptacle	Short Receptacle	Plug	Backshell
7 gr 0,015 lbs	6 gr 0,013 lbs	9 gr 0,020 lbs	4 - 7gr 0,009 - 0,015 lbs

Recommended mounting for receptacle screw torque


$0,5 \pm 0,1 \text{ N.m}$ or $4,4 \pm 0,9 \text{ In. LbF}$
 When using DEUSCH integrated nut plate PN 787-0016-00 (see page 6)

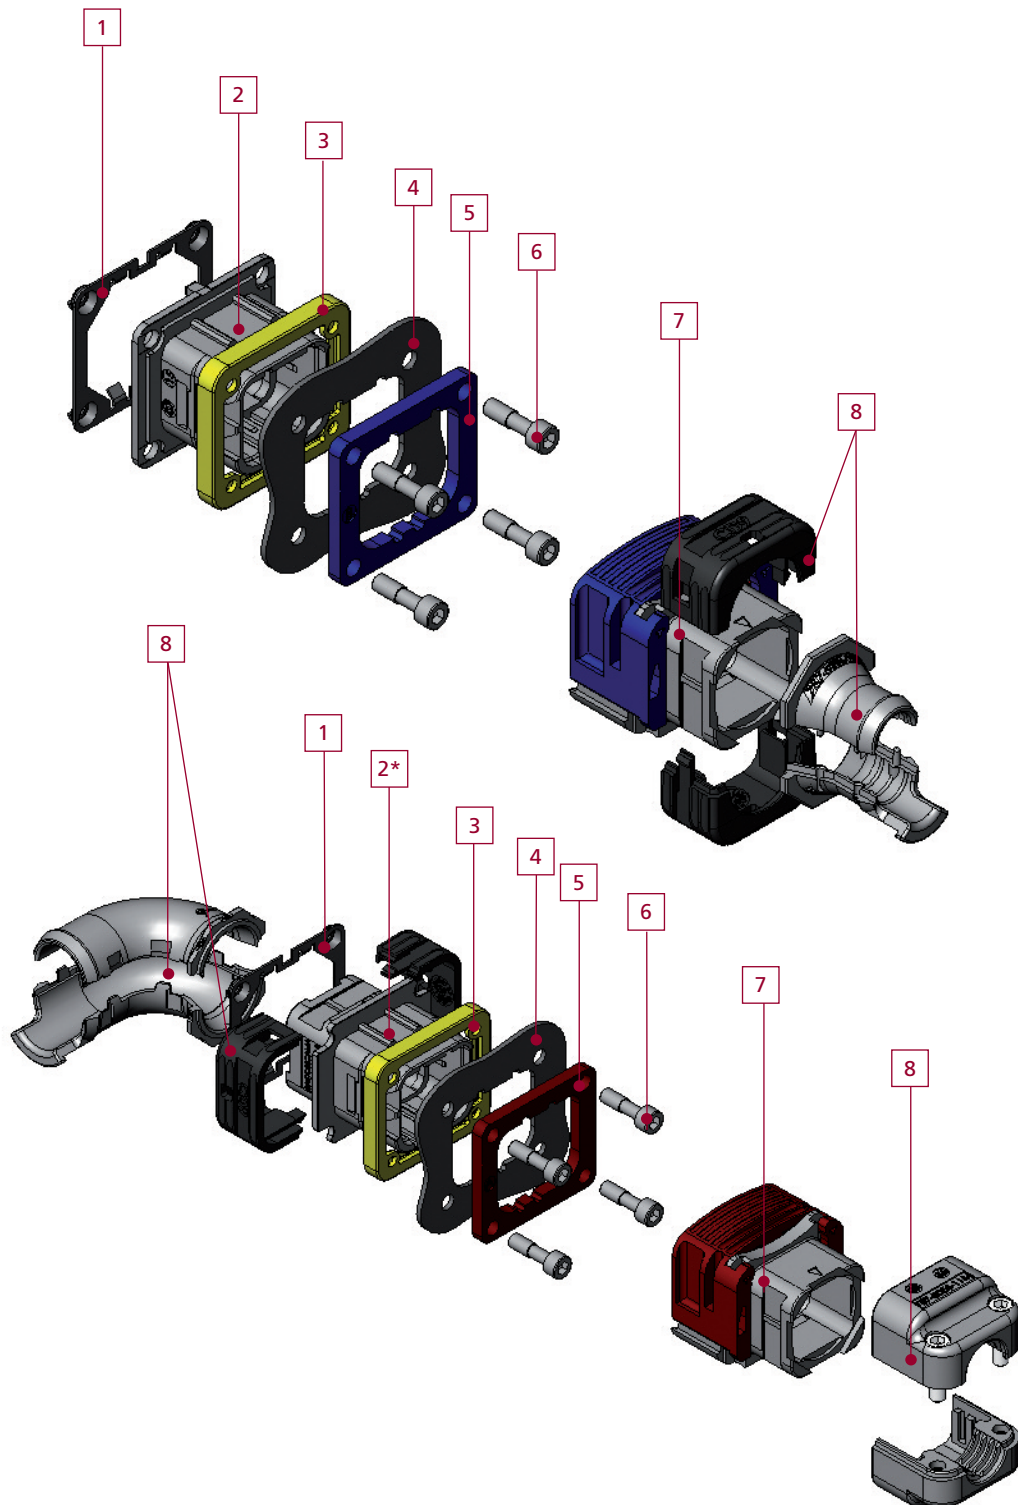

- | | |
|-------------------------------|----------------------------------|
| 1 - Nut plate (option). | 5 - Color coding plate (option). |
| 2 - Short receptacle. | 6 - Screws (non delivered). |
| 2* - Extender receptacle. | 7 - Plug. |
| 3 - Sealing gasket (option). | 8 - Backshell. |
| 4 - Panel (up to 2 mm thick). | |


DEUTSCH designation system for the shells

Example of order

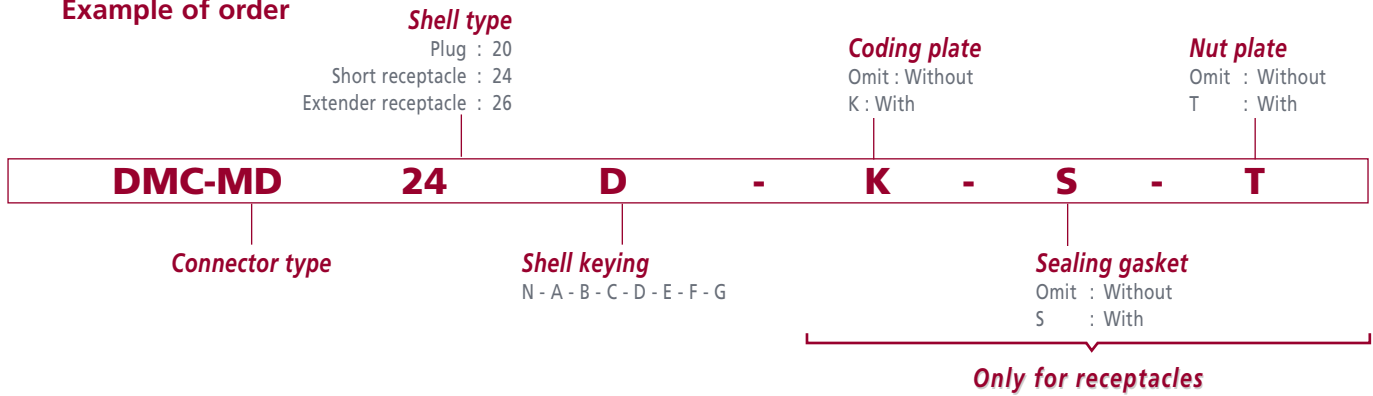


DEUTSCH designation system for the accessories

Example of order

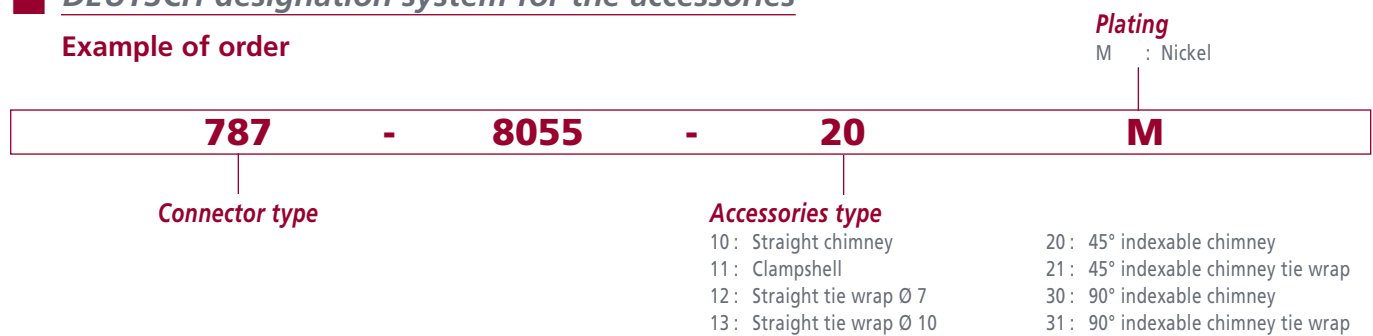


Standard designation system for the shells

Example of order

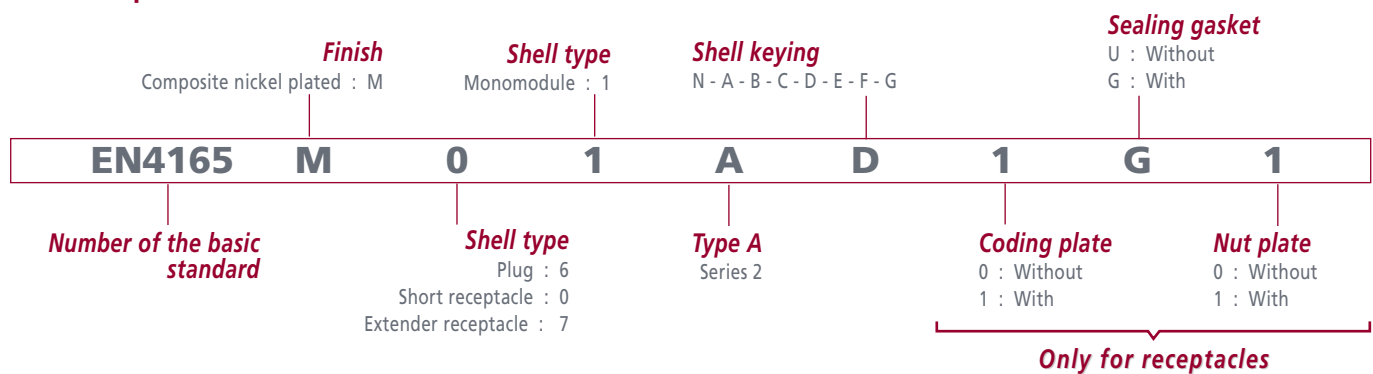

Standard designation system for the accessories

Example of order

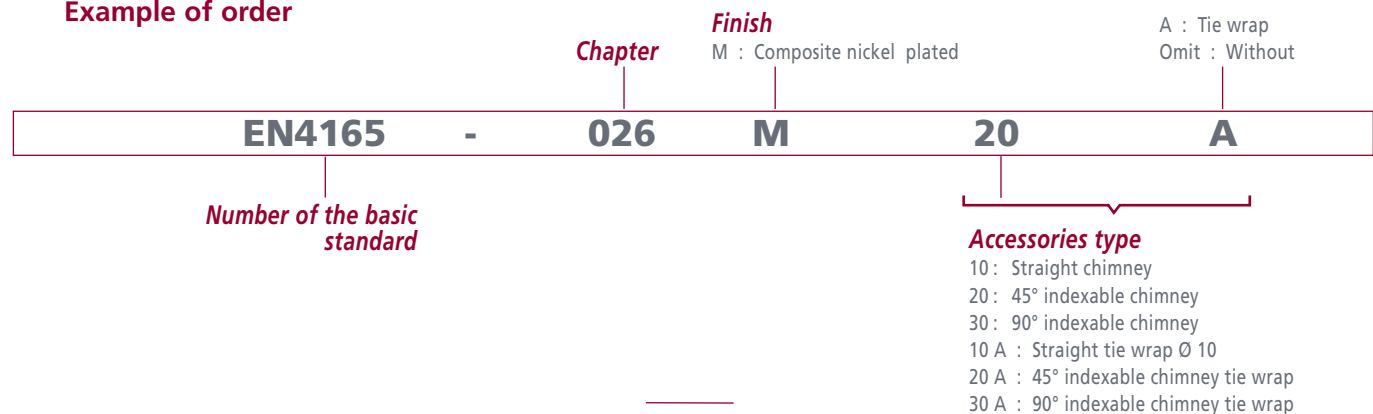

Backshells

STRAIGHT CLAMPSHELL
787-8055-11M
Screws delivered



STRAIGHT CHIMNEY
787-8055-10M
EN4165-026M10



STRAIGHT CHIMNEY TIE WRAP Ø 7
787-8055-12M



STRAIGHT CHIMNEY TIE WRAP Ø 10
787-8055-13M
EN4165-026M10A



45° INDEXABLE CHIMNEY
787-8055-20M
EN4165-026M20



45° INDEXABLE CHIMNEY TIE WRAP
787-8055-21M
EN4165-026M20A



90° INDEXABLE CHIMNEY
787-8055-30M
EN4165-026M30




90° INDEXABLE CHIMNEY TIE WRAP
787-8055-31M
EN4165-026M30A




Plugs


DMC-MD 20 N
BACC65BUMN
EN4165M61AN




DMC-MD 20 A
BACC65BUMA
EN4165M61AA




DMC-MD 20 B
BACC65BUMB
EN4165M61AB




DMC-MD 20 C
BACC65BUMC
EN4165M61AC




DMC-MD 20 D
BACC65BUMD
EN4165M61AD




DMC-MD 20 E
EN4165M61AE



DMC-MD 20 F
EN4165M61AF



DMC-MD 20 G
EN4165M61AG




DEUTSCH Part numbers (DMC-M / 787)
BOEING Part numbers (BACC)
STANDARD Part numbers (EN4165)

Receptacles

EXTENDER RECEPTACLE

DMC-MD 26 *X
BACC65CAM *X
EN4165M71A *X

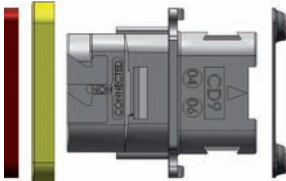


- : To be ordered separately (for BACC65 part numbers)

*X						
N	A	B	C	D	E	F
						G

SHORT RECEPTACLE

DMC-MD 24 *X
BACC65BVM *X
EN4165M01A *X



- : To be ordered separately (for BACC65 part numbers)

NO ACCESSORY CAN BE FIXED ON THIS RECEPTACLE

Backshells



STRAIGHT CLAMPSHELL
787-8055-11M
Screws delivered



STRAIGHT CHIMNEY
787-8055-10M
EN4165-026M10



STRAIGHT CHIMNEY TIE WRAP Ø 7
787-8055-12M



STRAIGHT CHIMNEY TIE WRAP Ø 10
787-8055-13M
EN4165-026M10A



45° INDEXABLE CHIMNEY
787-8055-20M
EN4165M20



45° INDEXABLE CHIMNEY TIE WRAP
787-8055-21M
EN4165-026M21A



90° INDEXABLE CHIMNEY
787-8055-30M
EN4165M30



90° INDEXABLE CHIMNEY TIE WRAP
787-8055-31M
EN4165-026M30A

High speed chimney


(consult us)



Note : These backshells have been specially developed for high speed wire management. Backshells have to be ordered with the DMC-M 99-02-XX inserts.


Optionnal parts for receptacle

Colored keying plate




- N : 787-0015-00 EN4165-25CN
- A : 787-0015-01 EN4165-25CA
- B : 787-0015-02 EN4165-25CB
- C : 787-0015-03 EN4165-25CC
- D : 787-0015-04 EN4165-25CD
- E : 787-0015-05 EN4165-25CE
- F : 787-0015-06 EN4165-25CF
- G : 787-0015-07 EN4165-25CG

Sealing gasket




787-0011-00
EN4165-25E

Nut plate



787-0016-00
EN4165-25D

Panel mounting bracket



787-8014-00

Protective caps




PROTECTION LEVEL	PLUG CAP 104-0236-00	RECEPTACLE CAP 104-0235-00	RECEPTACLE AND EXTENDER CAP WITH LANYARD 787-8011-00 WITHOUT LANYARD 787-8009-00	PLUG FLIGHT CAP 787-8010-00	RECEPTACLE AND EXTENDER FLIGHT CAP WITH LANYARD 787-8017-00 EN4165M3C WITHOUT LANYARD 787-8016-00
Shipping	X	X	-	-	-
Dust	X	X	X	X	X
EMI	-	-	X	X	X
Low pressure sealing	-	-	-	X	X


LANYARD
787-8013-00

Mounting bracket


Locate mating parts




Install rear dowels




Fix and snap in position




Installed

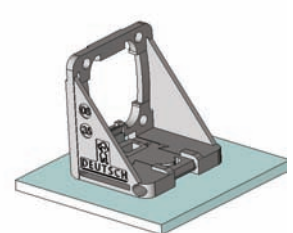


Align receptacle with bracket

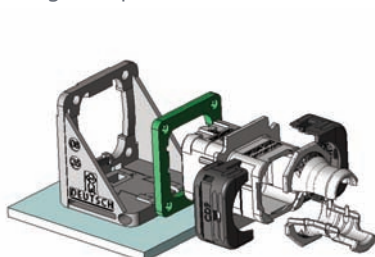



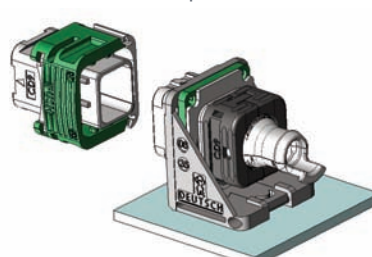








Install and fix in position



Assembled



Pin contacts as per MIL C 39029/58 and EN3155

Modules	Details	PART NUMBER CROSS
	20 contacts size 22	DMC-M 20-22 A* BAC110BC2022PNB EN4165A20-22 1*A
	12 contacts size 20	DMC-M 12-20 A* BAC110BC1220P*B EN4165A12-20 1*A
	8 contacts size 16	DMC-M 08-16 A* BAC110BC0816P*B EN4165A08-16 1*A
	4 contacts size 12	DMC-M 04-12 A* EN4165A04-12 1NA
	1 contact size 8	DMC-M 01-08 A* EN4165A01-08 1*A
	6 contacts size 16 + 5 contacts size 22	DMC-M 99-01 A* BAC110BC1622P*B EN4165A99-01 1*A
	20 contacts size 22	DMC-MA 20-22 A* EN4165A20A22 1*A
	6 contacts size 16 + 5 contacts size 22	DMC-MA 99-01 A* EN4165A99A01 1*A
	3 contacts size 20 + 8 contacts size 22	DMC-M 99-02 A* Gigabit insert (consult factory)
	8 contacts size 20 + 2 contacts size 16	DMC-M 99-10 A* EN4165A99-10 1*A
	Blanking module	DMC-M 00-00 AN EN4165A1*

Note : DMC-MA modules are Aluminium Cable contacts compliant and with EN3155-70 / 71 size 22.

Distribution modules use dedicated contacts based on standard EN3155-082.

DMC-M 99-02 are specific modules for Ethernet 1 Giga requirement.

Socket contacts as per MIL C 39029/57 and EN3155

Modules	Details	PART NUMBER CROSS
	20 contacts size 22	DMC-M 20-22 B* BAC110BC2022SNB EN4165A20-22 1*B
	12 contacts size 20	DMC-M 12-20 B* BAC110BC1220S*B EN4165A12-20 1*B
	8 contacts size 16	DMC-M 08-16 B* BAC110BC0816S*B EN4165A08-16 1*B
	4 contacts size 12	DMC-M 04-12 B* EN4165A04-12 1*B
	1 contact size 8	DMC-M 01-08 B* EN4165A01-08 1*B
	6 contacts size 16 + 5 contacts size 22	DMC-M 99-01 B* BAC110BC1622S*B EN4165A99-01 1*B
	20 contacts size 22	DMC-MA 20-22 B* EN4165A20A221*B
	6 contacts size 16 + 5 contacts size 22	DMC-MA 99-01 B* EN4165A99A01 1*B
	3 contacts size 20 + 8 contacts size 22	DMC-M 99-02 B* Gigabit insert (consult factory)
	8 contacts size 20 + 2 contacts size 16	DMC-M 99-10 B* EN4165A99-10 1*B
	3 x 4 + 4 x 2 Contacts size 22	DMC-M 22-07 B* EN4165A2AY221*B
	5 x 4 Contacts size 22	DMC-M 22-05 B* EN4165A20Y221*B
	10 x 2 Contacts size 22	DMC-M 22-10 B* EN4165A2BY221*B


Aluminium cable technology compliant

Distribution modules


DEUTSCH Part numbers (DMC-M / 787)
BOEING Part numbers (BACC)
STANDARD Part numbers (EN4165)

Receptacles & Plug


Short receptacle




Extender receptacle



Plug




Backshell / chimney indexation

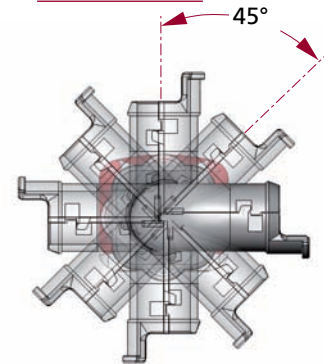


All backshells can be indexed in eight positions on the rear of plug and extender receptacle shell. This gives maximum flexibility during design and cable installation and reduces the number of variants and components.

Mounting panel


Short receptacle




Extender receptacle

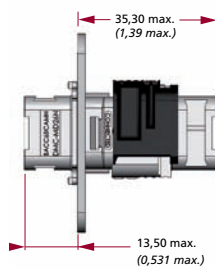


Straight chimney




Straight clampshell




Straight chimney tie wrap Ø 7




Straight chimney tie wrap Ø 10




45° indexable chimney




45° indexable chimney tie wrap

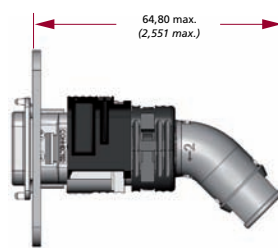


90° indexable chimney




Panel mounting cutout details Single Module EN4165

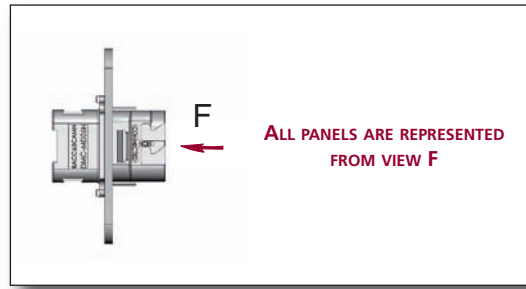


GENERIC DIMENSIONS

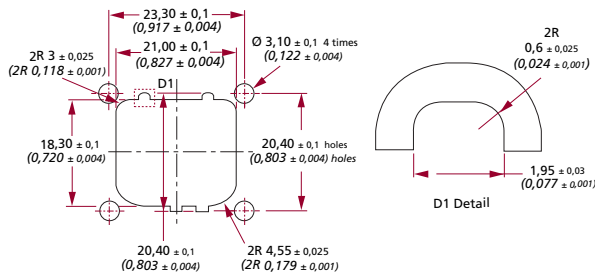

FREE

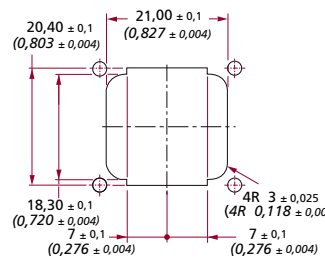


ORIENTATION

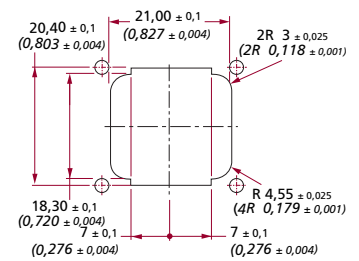


Note : Dimensions are in millimeters. Each hole $\text{Ø } 3,1$ mm ($\text{Ø } 0,122$ inch) must receive a screw (screw type 4-40)
 Recommended thickness panel : 0,8 mm mini ($0,031$ inch) - 2 mm maxi ($0,079$ inch).


Panel coding keying

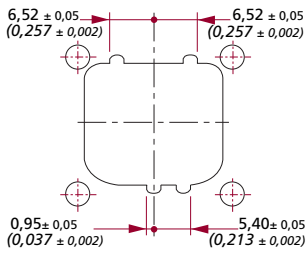


Coding N

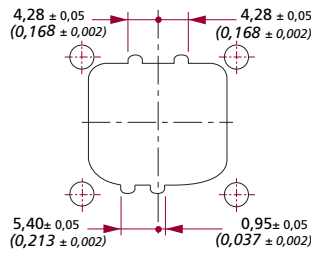


Coding A

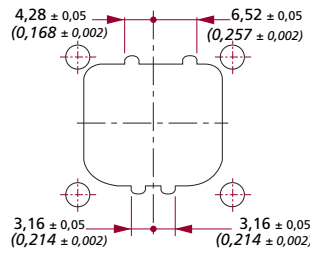


Coding B

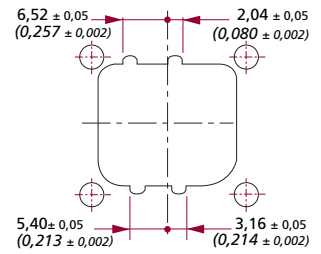


Coding C

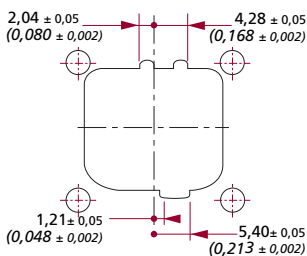


Coding D

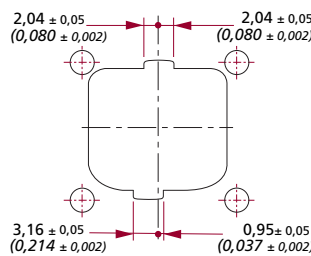

Coding E

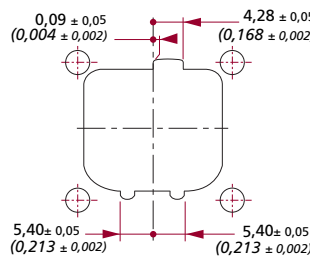


Coding F

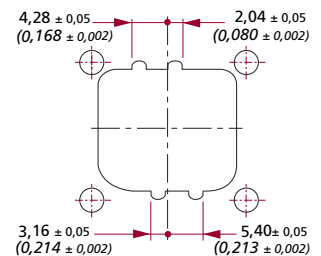

Coding G

Panel mounting bracket cutout details

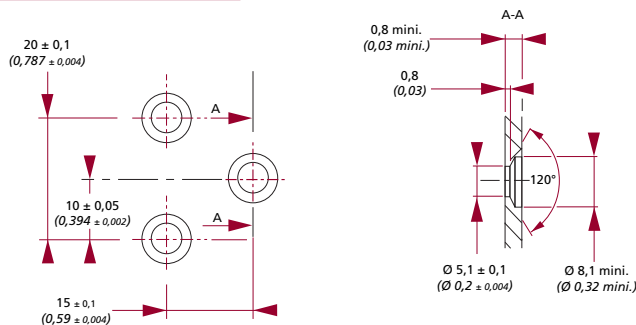

Overall dimensions and characteristics are given for indication guidance only. DEUTSCH reserves the right to modify them for production improvement reasons



www.deutsch.net

DEUTSCH GLOBAL SALES NETWORK

Contact your local sales office for further information:

FRANCE

Connecteurs Electriques
Deutsch
17, rue Lavoisier BP 117
27091 Evreux Cedex 09
FRANCE
Tel: +33 2 32 23 57 00

GERMANY

Compagnie Deutsch GMBH
Fraunhoferstrabe.11b
82152 Martinsried
GERMANY
Tel: +49 89 89 91 570

INDIA

DIPC
104, Prestige Omega, EPIP Zone
1st Phase, White Field Road
BANGALORE 560066
INDIA
Tel: +91 80 404 66 501

ISRAEL

Deutsch ECM
P.O. Box 5082
Ashkelon 78150
Southern Industrial Zone
ISRAEL
Tel: +972 8 671 9020

ITALY

Deutsch Italia S.R.L.
Viale Jenner 51
20159 Milano
ITALY
Tel: +39 02 37 617 44

JAPAN

Deutsch Japan Ltd.
4-3-28 Nishidai
Itabashi-ku
Tokyo 175-0045
JAPAN
Tel: +81 3 5922 1345

UNITED KINGDOM

Deutsch UK
Stanier Road
St Leonards on Sea
East Sussex TN38 9RF
UK
Tel: +44 (0) 1424 852721

USA

Deutsch DAO
250 Eddie Jones Way
Oceanside, CA 92054
USA
Tel: +1 (760) 757-7500



DEUTSCH

For more information, technical
assistance or custom solutions:
email ced@deutsch.net