



Micro ISO 1 Form A type


FEATURES

- Low profile automotive relays for Micro-ISO terminal
- Compact and high-capacity load switching
- Plastic sealed type

TYPICAL APPLICATIONS

- Headlights
- Magnetic clutches
- Radiator fans
- Blowers
- Fog lamps
- Tail lights
- Heaters
- Defoggers
- Horns
- Condenser fans, etc.

ORDERING INFORMATION

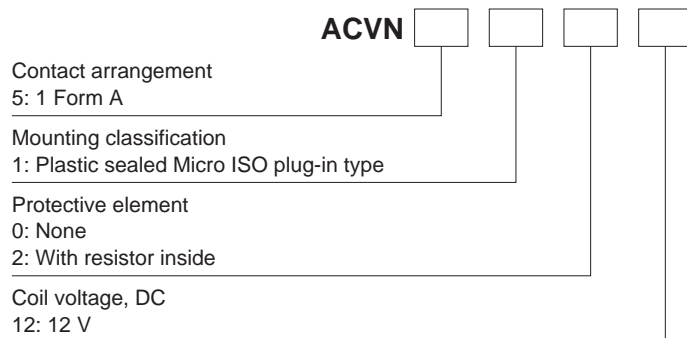

TYPES

Contact arrangement	Coil voltage	Protective construction	Mounting classification	Part No.
1 Form A	12 V DC	Plastic sealed type	Micro ISO plug-in type	ACVN51012

Note: Please use "ACVN**2**" to order with resistor inside type. (Asterisks " * " should be filled in from ORDERING INFORMATION.)
Standard packing; Carton: 50 pcs.; Case: 200 pcs.

RATING

1. Coil data

Nominal coil voltage	Pick-up voltage* (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power (at 20°C 68°F)	Usable voltage range (at 85°C 185°F)
12V DC	Max. 7.0 V DC (Initial)	Min. 0.5 V DC (Initial)	66.7 mA, 74.7 mA (with resistor)	180Ω, 160.7Ω (with resistor)	0.8 W, 0.9 W (with resistor)	10 to 16V DC

CV-N (ACVN)

2. Specifications

Characteristics	Item	Specifications	
Contact	Arrangement	1 Form A	
	Contact resistance (Initial)	Typ 3mΩ (By voltage drop 6V DC 1A)	
	Contact voltage drop (Initial)	N.O.: Max. 0.5 V (By voltage drop 14 V DC 35 A)	
	Contact material	Ag alloy (Cadmium free)	
Rating	Nominal switching capacity (resistive load)	N.O.: 35 A 14V DC	
	Max. carrying current (at 85°C 185°F, continuous)	N.O.: 20 A 14V DC	
	Nominal operating power (at 20°C 68°F)	0.8 W, 0.9 W (with resistor inside type)	
	Min. switching capacity (resistive load)** (at 20°C 68°F)	1 A 14V DC	
Electrical characteristics	Insulation resistance (Initial)	Min. 20 MΩ (at 500V DC, Measurement at same location as "Breakdown voltage" section.)	
	Breakdown voltage (Initial)	Between open contacts	500 Vrms for 1 min. (Detection current: 10mA)
		Between contacts and coil	500 Vrms for 1 min. (Detection current: 10mA)
	Operate time (at nominal voltage) (at 20°C 68°F)	Max. 10ms (excluding contact bounce time) (Initial)	
Release time (at nominal voltage) (at 20°C 68°F)	Max. 10ms (Initial)		
Mechanical characteristics	Shock resistance	Functional	Min. 100 m/s ² {10G} (Half-wave pulse of sine wave: 11ms; detection time: 10μs)
		Destructive	Min. 1,000 m/s ² {100G} (Half-wave pulse of sine wave: 6ms)
	Vibration resistance	Functional	10 Hz to 100 Hz, Min. 44.1 m/s ² {4.5G} (Detection time: 10μs)
		Destructive	10 Hz to 500 Hz, Min. 44.1 m/s ² {4.5G}, Time of vibration for each direction; X, Y, Z direction: 4 hours
Expected life	Mechanical	Min. 10 ⁶ (at 120 cpm)	
	Electrical	<Resistive load> Min. 10 ⁵ (at nominal switching capacity, operating frequency: 2s ON, 2s OFF)	
		<Motor load> Min. 3 × 10 ⁵ (at 84 A (inrush), 18 A (steady), 14 V DC), Operating frequency: 2s ON, 5s OFF	
<Lamp load> Min. 2 × 10 ⁵ (at 84 A (inrush), 12 A (steady), 14 V DC), Operating frequency: 1s ON, 14s OFF			
Conditions	Conditions for operation, transport and storage*2	Ambient temperature: -40°C to +85°C -40°F to +185°F*3, Humidity: 5% R.H. to 85% R.H. (Not freezing and condensing at low temperature), air pressure: 86 to 106kPa	
Mass		Approx. 12 g .42 oz	

Notes:

*1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.


*2. The upper operation ambient temperature limit is the maximum temperature that can satisfy the coil temperature rise value. Refer to "6. Usage, Storage and Transport Conditions" in [AMBIENT ENVIRONMENT](#) section in [Relay Technical Information](#).

*3. Please inquire if you will be using the relay in a high temperature atmosphere.

REFERENCE DATA


1. Coil temperature rise

Point measured: Inside the coil
 Contact carrying current: 20A
 Coil applied voltage: 12V, 14V, 16V
 Ambient temperature: 85°C 185°F

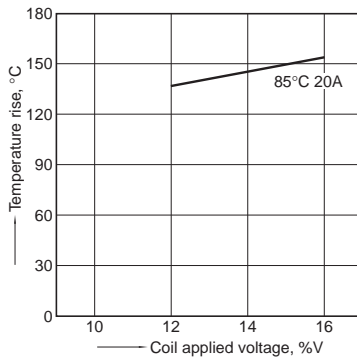


2. Distribution of pick-up and drop-out voltage

Sample: ACVN51012, 20pcs

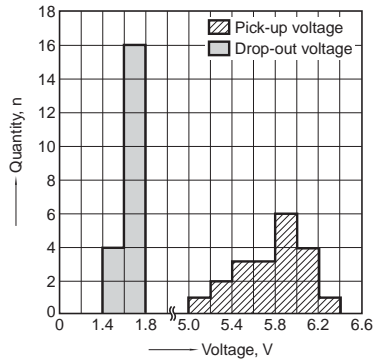


3. Distribution of operate and release time

Sample: ACVN51012, 20pcs.

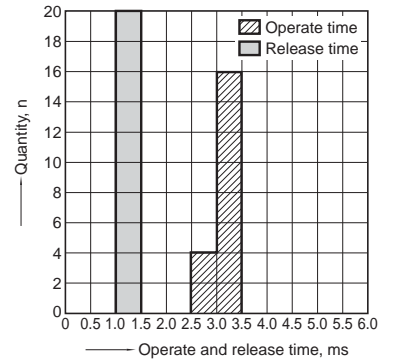


4. Ambient temperature and operating voltage range

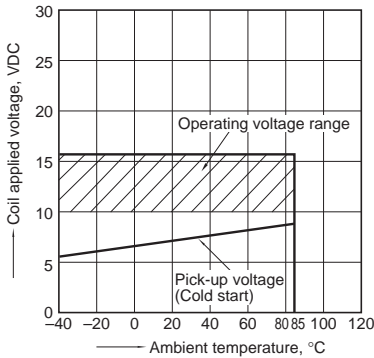


5.-(1) Electrical life test (Lamp load)

Sample: ACVN51012, 3pcs.
 Load: 60W×2 (halogen lamp load), Inrush: 84A/
 steady: 12A
 Switching frequency: ON 1s, OFF 14s
 Ambient temperature: 85°C 185°F


Circuit



Change of pick-up and drop-out voltage

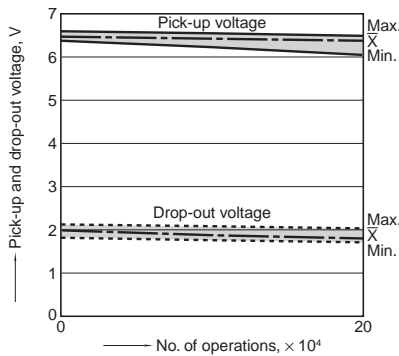


Change of contact resistance

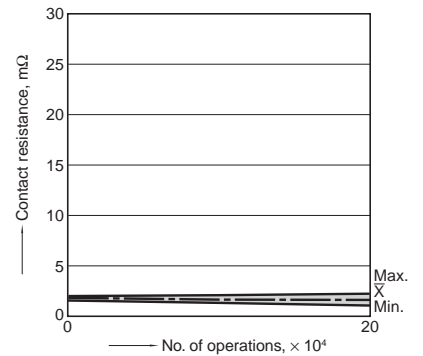

Load current waveform

Inrush current: 84A, steady current: 12A

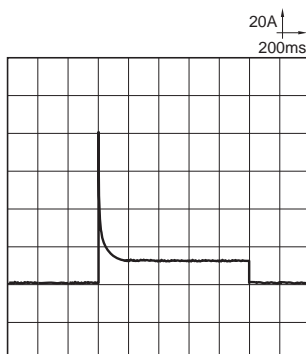


CV-N (ACVN)


5.-(2) Electrical life test (Motor load)

Sample: ACVN51012, 3pcs.
 Inrush: 80A/steady: 18A,
 radiator fan motor (motor free)
 Switching frequency: ON 1s, OFF 4s
 Ambient temperature: 85°C 185°F


Circuit

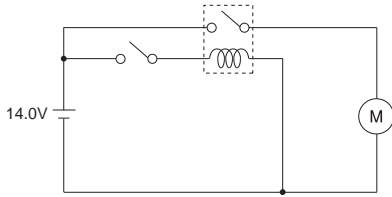

Change of pick-up and drop-out voltage

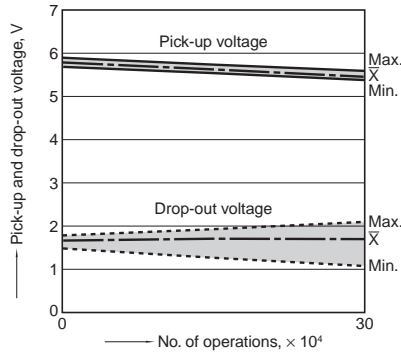


Change of contact resistance

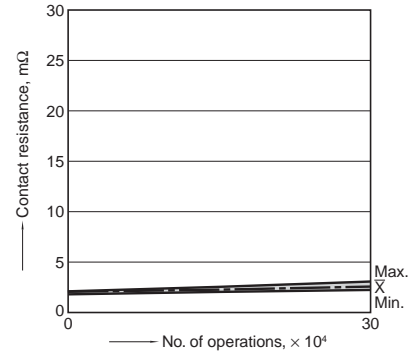

Load current waveform

Inrush current: 80A, steady current: 18A

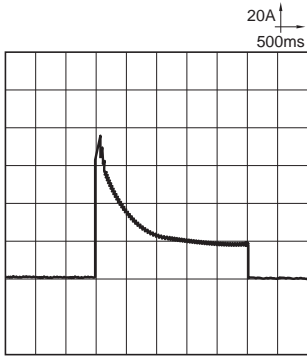

DIMENSIONS (mm inch)


Download [CAD Data](#) from our Web site.

1. Micro ISO plug-in type


[CAD Data](#)



External dimensions

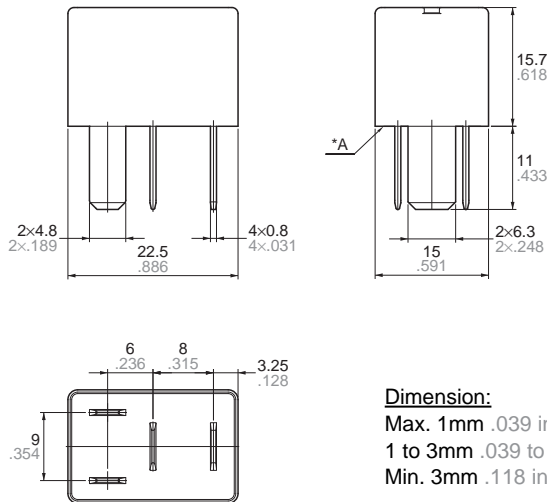

Schematic (Bottom view)



Dimension:	Tolerance
Max. 1mm .039 inch:	±0.1 ±.004
1 to 3mm .039 to .118 inch:	±0.2 ±.008
Min. 3mm .118 inch:	±0.3 ±.012

Note: Intervals between terminals is measured at A surface level.

For Cautions for Use, see [Relay Technical Information](#).