




[PAGE BACK](#) [CLOSE](#)

Product Name Common Mode Filter for Signal Line
Series ZJYS Series
Type 51R5 Type
Model 2 lines
Part Number ZJYS51R5-2P-01

Product Lifecycle Stage PROD

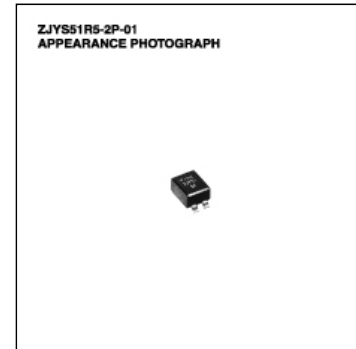

Specification

Mounting Method Flag	Yes	
Shape	Gull-Wing	
AC/DC Classification	DC	
Number of Elements	Nom	2
Number of Circuits	Nom	2
Size Code	9050	
Body Length(L)	Nom	9 m m
Body Breadth(W)	Nom	5.5 m m
Body Height(T)	Nom	5.08 m m
Common Mode Impedance	Min	200 Ohm
	Typ	600 Ohm
Frequency of Common Mode Impedance	Nom	100 M Hz
Rated Voltage	Max	50 V
Rated Current	Max	2 A
Insulation Resistance	Min	100 M Ohm
DC Resistance	Max	0.12 Ohm
Soldering Method	Reflow,Iron Soldering	
Category Temperature Range	Min	-25 Cel
	Max	85 Cel
Storage Temperature Range	Min	-25 Cel
	Max	85 Cel
Weight	Nom	0.4 g

Summary/Applications/Feature

Summary	A common mode filter for distortion-free noise removal from transmitted signals. Optimized for transmission of high quality signals.
Applications	Personal computers, telephones, LANs, ISDNs, digital PBXs, electronic games, CTVs, CD-ROM drives, 8mm video equipment, and other electronic devices.
Feature	Best filter for countering the common mode noise resulting from data signal processing by PCs, phone equipment, etc. SMD-type designed for surface mounting.

Packaging

Packing	Bulk(Bag)	
Minimum Package Qty	Nom	1500 Pcs
Minimum Order Qty	Nom	1500 Pcs

[Details](#)

● [Caution]

Specifications which provide more details for the proper and safe use of the described product are available upon request.

● [Notice of Revision and Improve]

All specifications are subject to change without notice.

[PAGE TOP](#)

Copyright(c) 1996-2008 All rights reserved.